
GENERATOR SECTION (upper half, 1:2.2)

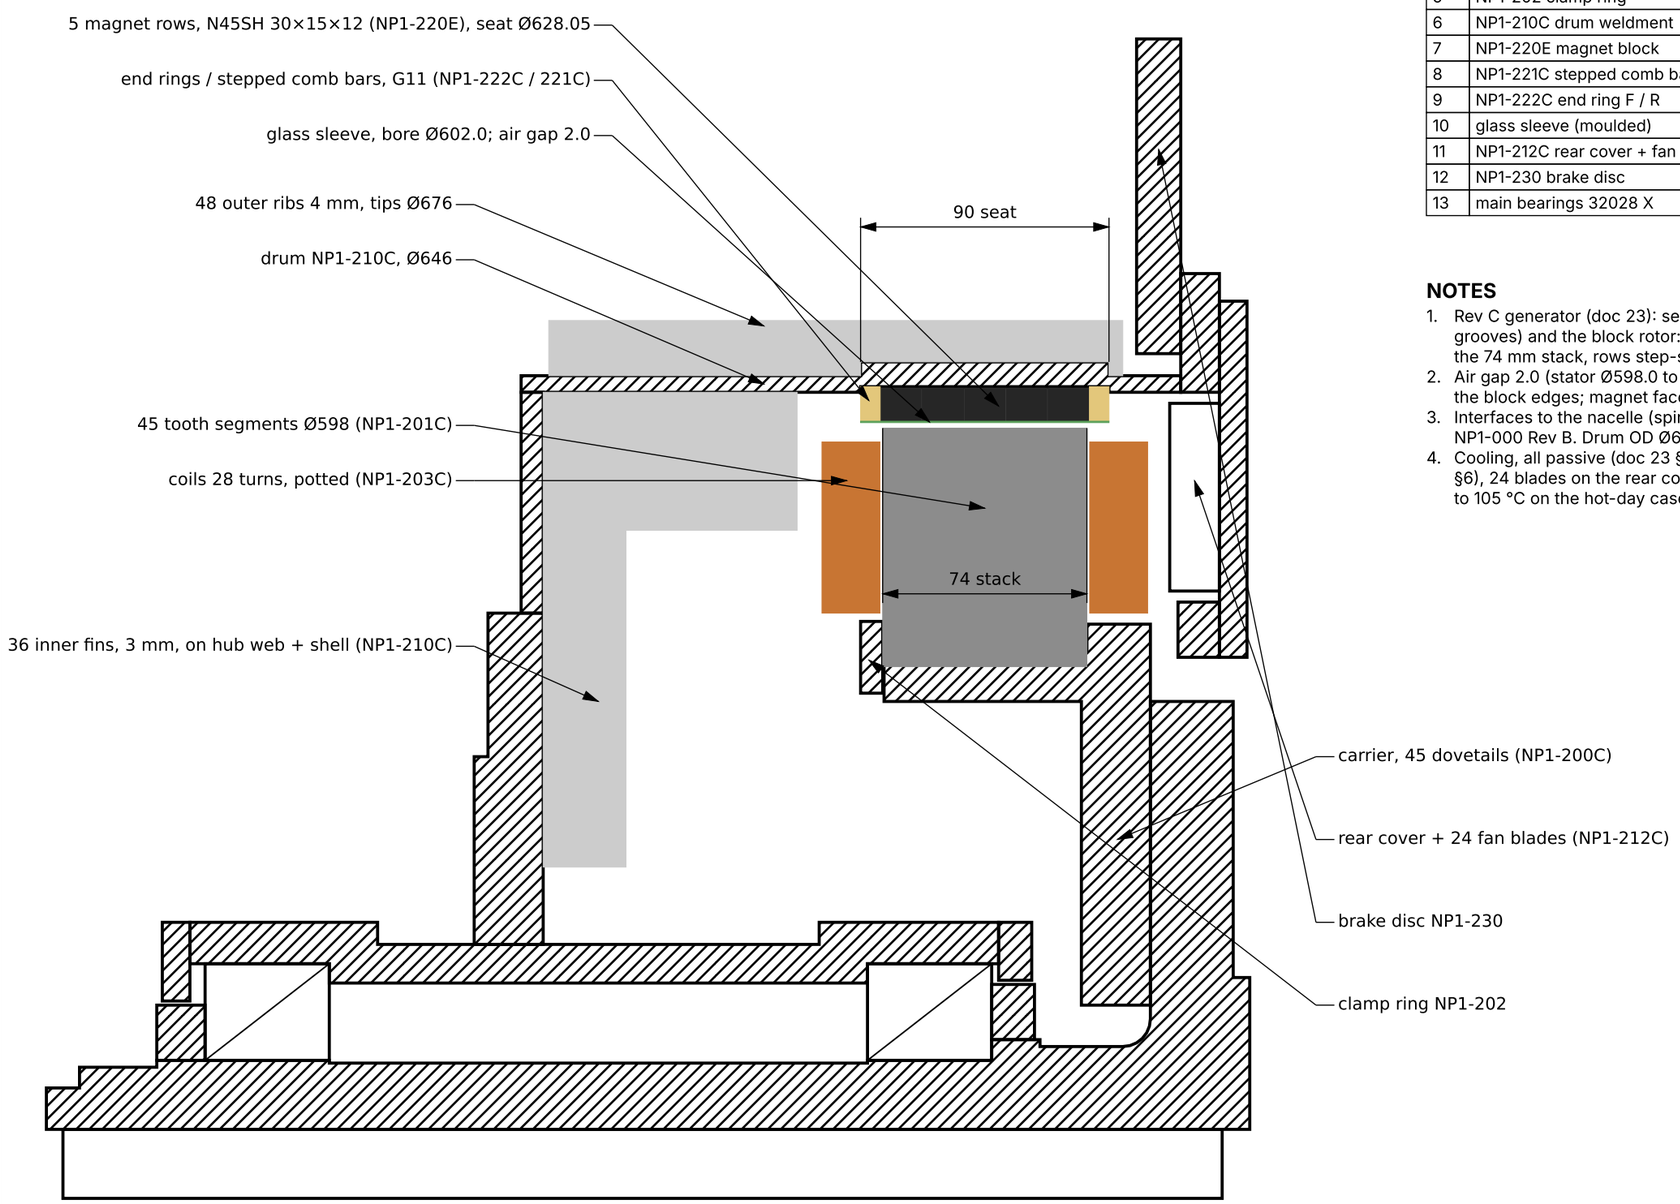

#	Part	Qty	Material / note
1	NP1-100 spindle (stationary)	1	42CrMo4+QT
2	NP1-200C stator carrier	1	S355J2+N, 45 dovetails
3	NP1-201C tooth segment stack	45+3	M270-35A bonded, 205 sh.
4	NP1-203C coil on segment	45+3	28 t × 4 × Ø1.55, cl. 200
5	NP1-202 clamp ring	1	1.4404
6	NP1-210C drum weldment	1	S355J2+N, seat Ø628.05
7	NP1-220E magnet block	200+10	N45SH 30×15×12
8	NP1-221C stepped comb bar	40+4	G11
9	NP1-222C end ring F / R	1+1	G11
10	glass sleeve (moulded)	1	E-glass/epoxy 0.5–0.9
11	NP1-212C rear cover + fan	1	5083, 24 blades
12	NP1-230 brake disc	1	C45E+N
13	main bearings 32028 X	2	bought

NOTES

1. Rev C generator (doc 23): segmented stator of doc 18 (45 tooth segments in carrier dovetail grooves) and the block rotor: one N45SH block 30 × 15 × 12 per pole across, five rows along the 74 mm stack, rows step-skewed 0.20° by the stepped comb bars.
2. Air gap 2.0 (stator Ø598.0 to sleeve bore Ø602.0); sleeve 0.52 at the block centre, 0.89 at the block edges; magnet face r 301.52.
3. Interfaces to the nacelle (spindle, bearings, hub flange, disc, bedplate) unchanged from NP1-000 Rev B. Drum OD Ø646 unchanged.
4. Cooling, all passive (doc 23 §4 and §4a): carrier → spindle → finned insert path (doc 14 §6), 24 blades on the rear cover, 36 inner fins and 48 outer ribs on the drum; hot spot 94 to 105 °C on the hot-day cases (limit 130).

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · GENERATOR REV C (DOC 23)

GENERATOR REV C · ASSEMBLY SECTION

DRAWING NO.	REV / DATE	SCALE (A3)
NP1-G00	C · 2026-11-05	1:2.2
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
see parts list	≈ 330 kg drivetrain (no hub)	Claude / not checked