

HSE TOOLBOX TALK

PERSONAL PROTECTIVE EQUIPMENT


PURPOSE AND SCOPE

Ensure that personal protective equipment is suitable for the task and hazards, inspected before use, fitted correctly, maintained properly and removed from service when damaged or unsuitable. PPE does not eliminate hazards and must not replace engineering or collective controls. It is the final line of defence between the worker and the hazard when other controls cannot fully remove the risk.

KEY HAZARDS



CRITICAL VALUES TO VERIFY IN THE FIELD

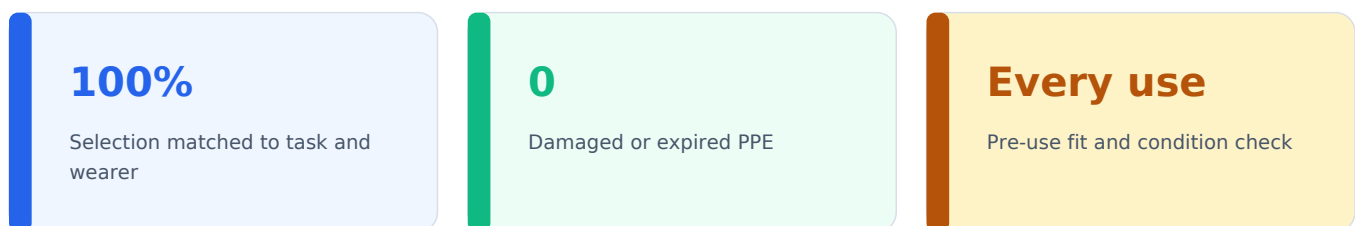

REMEMBER - SERNEM

S

Stop and think

E

Evaluate the risk

R

Remove or reduce

N

Never assume

E

Ensure protection

M

Monitor and communicate

HSE TOOLBOX TALK

PERSONAL PROTECTIVE EQUIPMENT

STANDARDS AND FIELD REQUIREMENTS

OSHA 1910 Subpart I requires hazard assessment, correct selection, fit, maintenance and worker training. PPE is the last line of defence.

OSHA 1910.132(d)

HAZARD ASSESSMENT

Assess workplace hazards, select suitable PPE and certify the assessment in writing.

OSHA 1910.132(e)

DEFECTIVE EQUIPMENT

Do not use defective or damaged PPE; quarantine and replace it.

OSHA 1910.132(f)

TRAINING

Train when and what PPE is needed, how to wear it, its limitations, care and useful life.

OSHA 1910.134

RESPIRATORY PROTECTION

Where required, provide medical evaluation, correct respirator selection, fit testing and a written program.

MINIMUM EVIDENCE BEFORE START

- | | |
|--|--|
| ☐ Certified PPE hazard assessment | ☐ Task / PPE selection matrix |
| ☐ Fit and fit-test record | ☐ Worker training record |
| ☐ Periodic inspection record | ☐ Replacement and hygiene arrangement |

SUPERVISOR DISCUSSION POINTS

- Which PPE is mandatory for today's task?
- Has all PPE been inspected before use?
- Are the selected gloves suitable for the task?

CORRECT SELECTION, FIT AND PRE-USE INSPECTION



Hazard assessment - Fit - Damage check - Hygiene - Replacement

HSE TOOLBOX TALK

PERSONAL PROTECTIVE EQUIPMENT

CRITICAL CONTROL MEASURES (HIERARCHY OF CONTROLS)

1. REMOVE THE HAZARD

Select PPE according to the risk assessment. Inspect PPE visually before every use.

2. USE ENGINEERING CONTROLS

Replace damaged or unsuitable PPE immediately. Use the correct size and adjust PPE properly. Secure helmet chin straps where required.

3. SELECT AND FIT CORRECT PPE

Verify respirator filter type and service life. Select chemical gloves using SDS information. Store PPE in a clean, dry and protected area.

4. INSPECT, CLEAN AND REPLACE

Clean shared PPE before use. Follow PPE training and manufacturer instructions.

CRITICAL WARNING



Simply wearing PPE is not enough. Protection depends on correct selection, good condition, proper fit and correct use.

SITE CHECKLIST (BEFORE STARTING WORK)

- | | |
|---|---|
| ☐ Helmet intact | ☐ Chin strap suitable |
| ☐ Eyewear clean | ☐ Face shield ready |
| ☐ Gloves suitable | ☐ Footwear intact |
| ☐ Hearing protection ready | ☐ Respirator/filter suitable |
| ☐ PPE fits correctly | |

HSE TOOLBOX TALK

PERSONAL PROTECTIVE EQUIPMENT

ATTENDANCE AND APPROVAL

Project / Site:

Date:

Presented by:

Work area:

No	Full Name	Company / Role	Signature
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			