
BOSARI
THERMAL MANAGEMENT

DATA SHEET

# ATLANTIS® BAE9

Water cooler

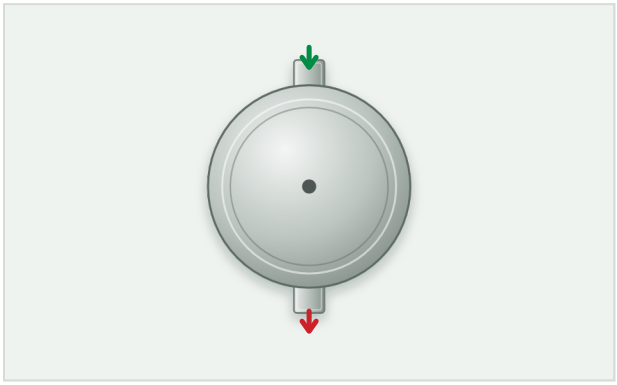

- **Up to 4,000 W (2,000 + 2,000)**
- **Contact area up to Ø 79 mm**
- **Weight approx. 330 g**

| THERMAL | |
|---|---|
| Rth (single side) @6 l/min | **11 K/kW** |
| Rth (double side) @6 l/min | **7 K/kW** |
| Min. temp. of inlet fluid | **−25 °C** |
| Typ. temp. of inlet fluid | **+60 °C** |
| Max. operating temp.* | **+85 °C** |

| MECHANICAL AND ENVIRONMENTAL | |
|---|---|
| Clamping force up to | **90 kN** |
| Shocks and vibrations | **IEC 77 §16** |
| Cooling flow rate | **3 ÷ 9 l/min** |
| Max. pressure drop @6 l/min | **0.5 bar** |
| Typ. pressure drop @6 l/min | **0.3 bar** |
| Storage temperature | **−40 °C ÷ +85 °C** |
| Surface parallelism | **0.05 mm** |
| Surface planarity | **0.02 mm** |
| Surface roughness | **Ra 1.6** |
| Overall dimensions | **see drawing** |
| Weight | **330 g approx.** |

* With pure water – usually depending on kind of cooling fluid and external circuit.

## Description

During the course of recent years the development of electronic power components has made necessary to dissipate larger quantities of thermal heat at lower values of junction temperatures in order to increase their operating life.

The designers have become more and more familiar with alternative cooling systems, such as water cooling, that have shown the highest reliability in severe environmental conditions.

As an answer to high power dissipation problems, Bosari Thermal Management (BTM) has designed and developed a new family of aluminium water coolers, suitable to accept Thyristors, GTOs, and the recent IGBT components, dissipating up to 4.000W on both sides (2.000 + 2.000), with a contact area up to a diameter of 79mm (custom tailored up to 85mm).

This new cooler family can be easily adapted to the customer needs, by mounting the proper cooling fluid nipple (aluminium, titanium, etc.).

The basic concept of these coolers makes them really cost-effective, allowing a longer operating life to the components at a really reasonable price, thus permitting to adopt them in the most part of heavy industrial applications, welding, light and heavy electrical traction.

Bosari Thermal Management S.r.l. · Via Eugenio Montale, 14, 20090 Opera (MI), Italy
+39 02 1234 5678 · info@bosari.it

Data subject to change without notice.

**DRAFT – placeholder contact details.**