

INSTRUCTIONS

- 1- The surface of the pipe connection parts must be scratch-free, smooth, and clean, and burrs are not allowed at the connection points.
- 2- The lower limit dimensions of the gauge must not be exceeded.
- 3- A length tolerance deviation of more than 2 mm is allowed under current conditions.

DRAWER

Gökay Baytok

EN12735-1

AKGÜN SOĞUTMA İÇ VE DIŞ TİC.LTD. ŞTİ.

Initial Inspection

Inspection

Technical Control

Product Approval

Final Approval

DATE

Ahmet Akgün

2024/10/15

Drawing Stage

No:002

Total Pages 9


Weight

/

Page 1

Branch Pipe KIT

CZ-P224BK2BM AA

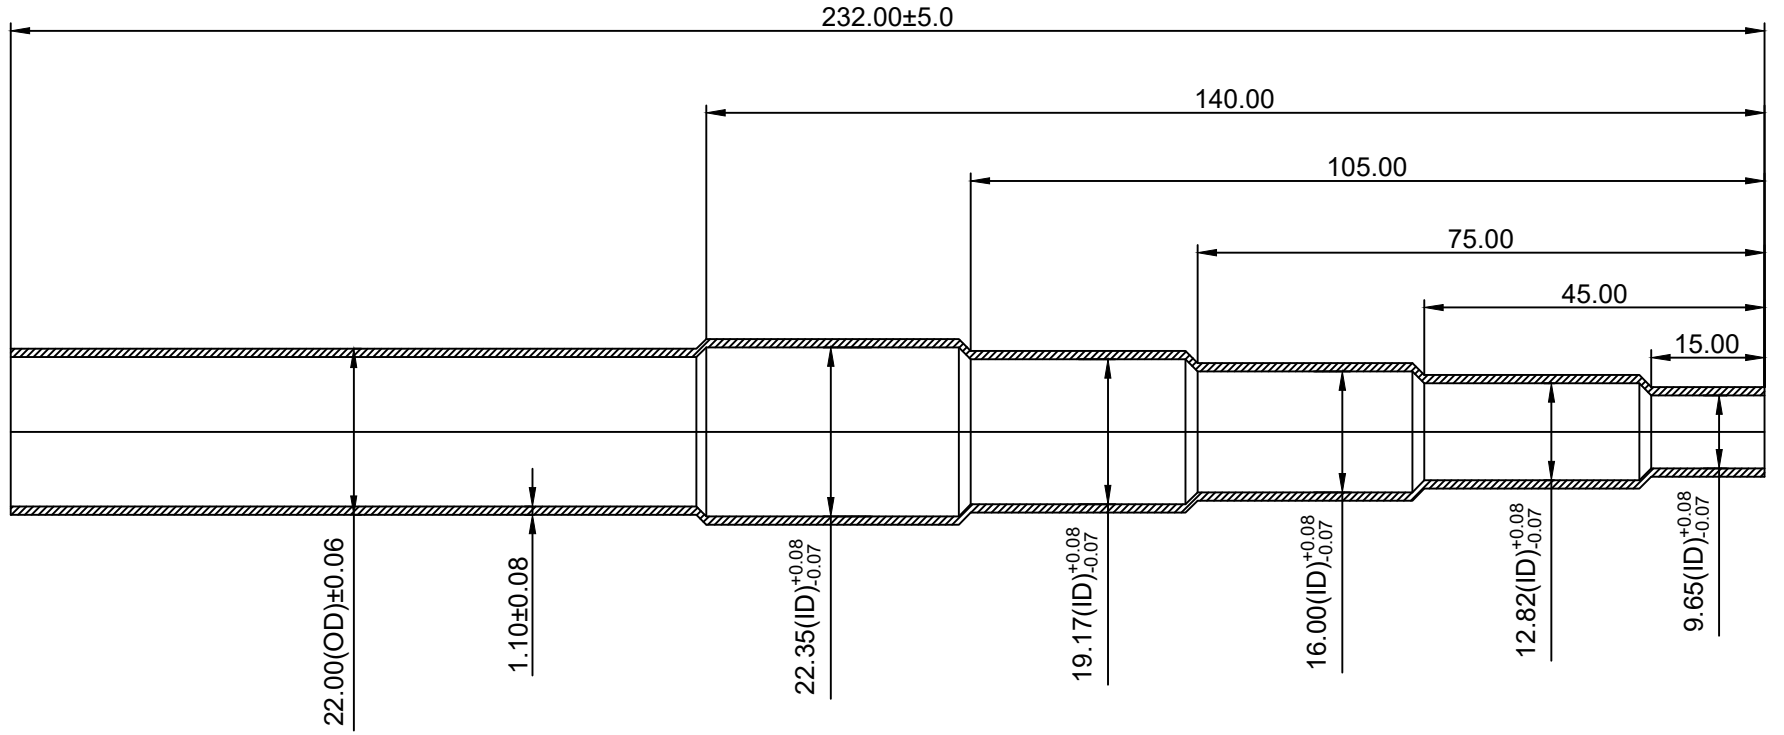

INSTRUCTIONS

- 1- The surface of the pipe connection parts must be scratch-free, smooth, and clean, and burrs are not allowed at the connection points.
- 2- The lower limit dimensions of the gauge must not be exceeded.
- 3- A length tolerance deviation of more than 2 mm is allowed under current conditions.

DRAWER

Gökay Baytok

EN12735-1

AKGÜN SOĞUTMA İÇ VE DIŞ TİC.LTD. ŞTİ.

Initial Inspection

Inspection

Technical Control

Product Approval

Final Approval

DATE

Ahmet Akgün

2024/10/15

Drawing Stage

No:002

Total Pages 9


Weight

/

Page 3

Branch Pipe KIT

CZ-P224BK2BM Ab

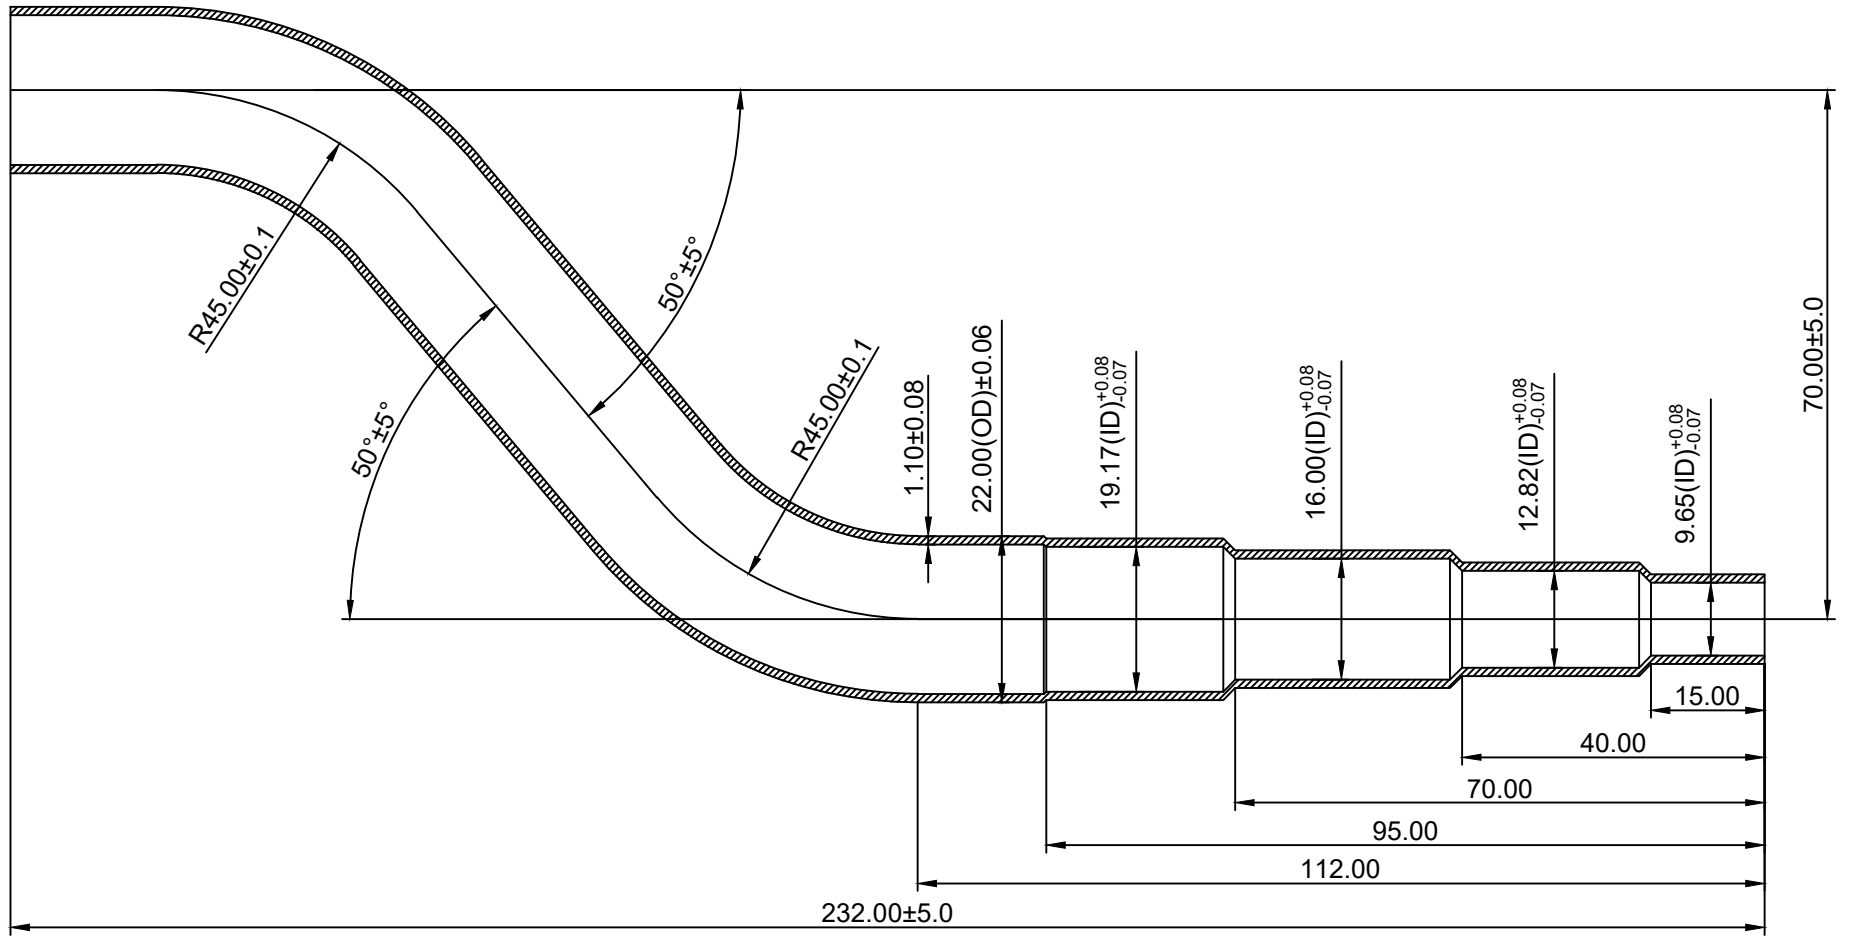

INSTRUCTIONS

- 1- The surface of the pipe connection parts must be scratch-free, smooth, and clean, and burrs are not allowed at the connection points.
- 2- The lower limit dimensions of the gauge must not be exceeded.
- 3- A length tolerance deviation of more than 2 mm is allowed under current conditions.

DRAWER

Gökay Baytok

EN12735-1

AKGÜN SOĞUTMA İÇ VE DIŞ TİC.LTD. ŞTİ.

Initial Inspection

Inspection

Technical Control

Product Approval

Final Approval

DATE

Ahmet Akgün

2024/10/15

Drawing Stage

Weight

No:002


/

Total Pages 9

Page 4

Branch Pipe KIT

CZ-P224BK2BM Ac

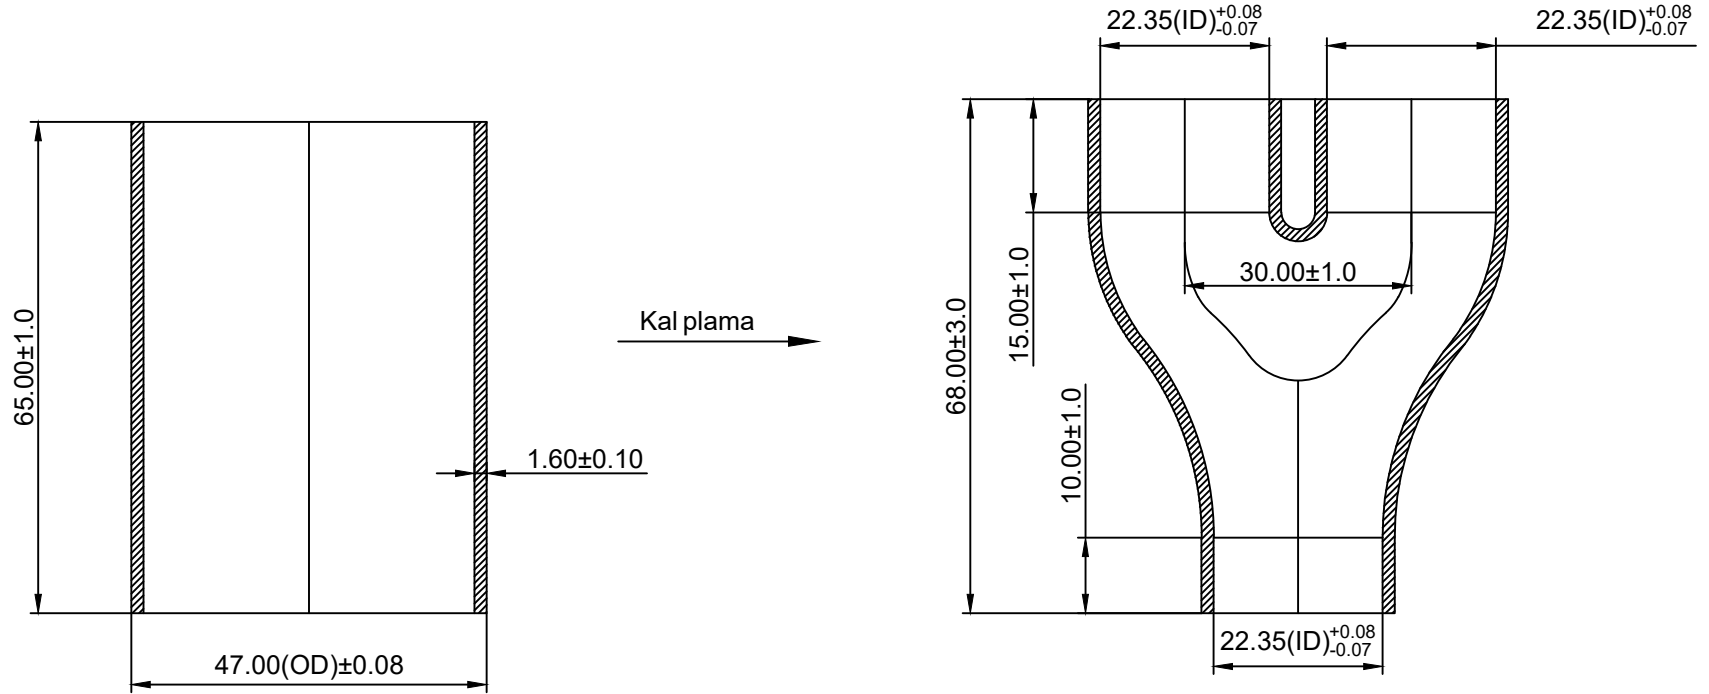

INSTRUCTIONS

- 1- The surface of the pipe connection parts must be scratch-free, smooth, and clean, and burrs are not allowed at the connection points.
- 2- The lower limit dimensions of the gauge must not be exceeded.
- 3- A length tolerance deviation of more than 2 mm is allowed under current conditions.

DRAWER

Gökay Baytok

EN12735-1

AKGÜN SOĞUTMA İÇ VE DIŞ TİC.LTD. ŞTİ.

Initial Inspection

Inspection

Technical Control

Product Approval

Final Approval

DATE

Ahmet Akgün

2024/10/15

Drawing Stage

No:002

Total Pages 9


Weight

/

Page 2

Branch Pipe KIT

CZ-P224BK2BM Ay

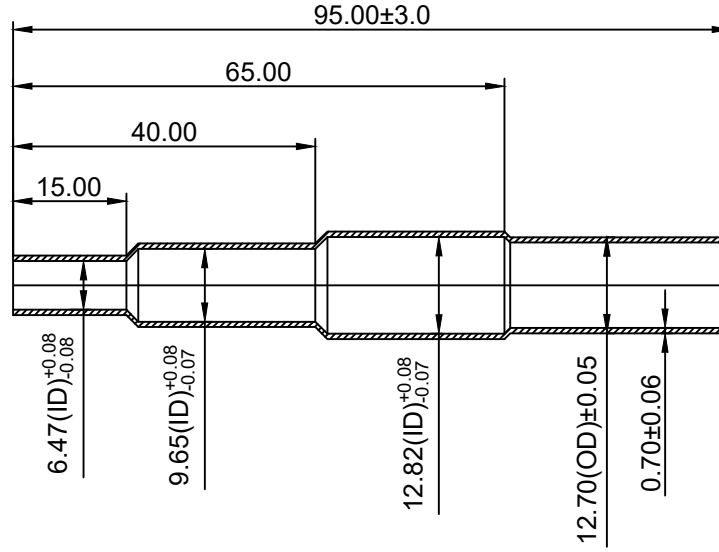

INSTRUCTIONS

- 1- The surface of the pipe connection parts must be scratch-free, smooth, and clean, and burrs are not allowed at the connection points.
- 2- The lower limit dimensions of the gauge must not be exceeded.
- 3- A length tolerance deviation of more than 2 mm is allowed under current conditions.

DRAWER

Gökay Baytok

EN12735-1

AKGÜN SOĞUTMA İÇ VE DIŞ TİC.LTD. ŞTİ.

Initial Inspection

Inspection

Technical Control

Product Approval

Final Approval

DATE

Ahmet Akgün

2024/10/15

Drawing Stage

Weight

No:002


/

Total Pages 9

Page 5

Branch Pipe KIT

CZ-P224BK2BM BA

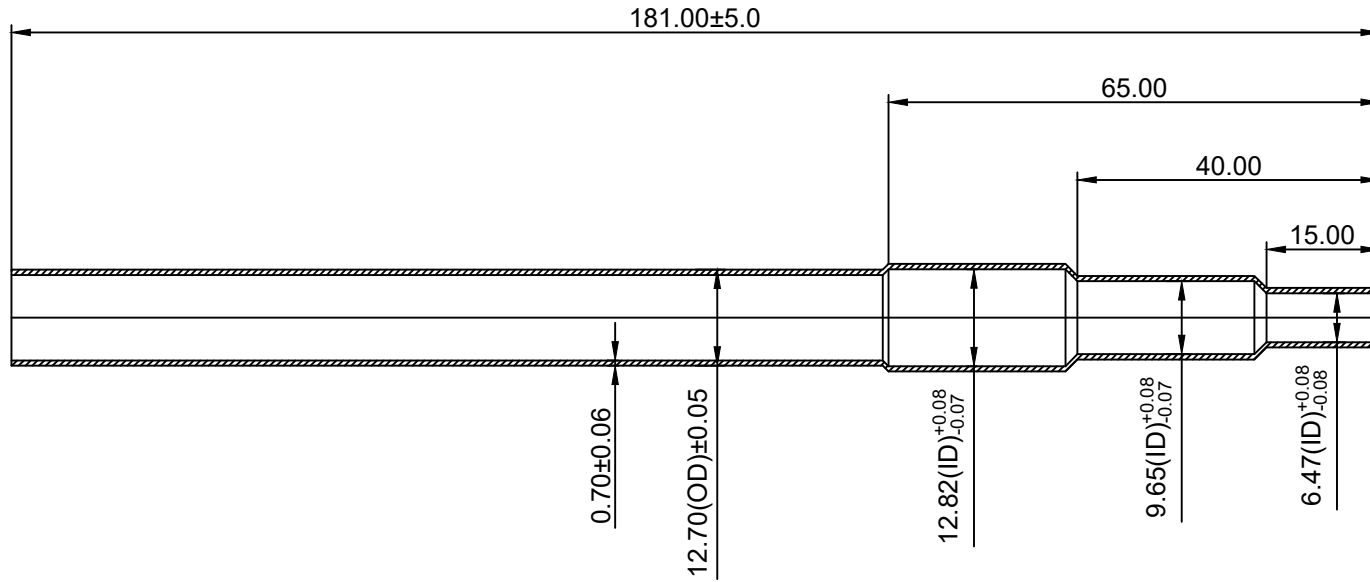

INSTRUCTIONS

- 1- The surface of the pipe connection parts must be scratch-free, smooth, and clean, and burrs are not allowed at the connection points.
- 2- The lower limit dimensions of the gauge must not be exceeded.
- 3- A length tolerance deviation of more than 2 mm is allowed under current conditions.

DRAWER

Gökay Baytok

EN12735-1

AKGÜN SOĞUTMA İÇ VE DIŞ TİC.LTD. ŞTİ.

Initial Inspection

Inspection

Technical Control

Product Approval

Final Approval

DATE

Ahmet Akgün

2024/10/15

Drawing Stage

No:002

Total Pages 9


Weight

/

Page 7

Branch Pipe KIT

CZ-P224BK2BM Bb

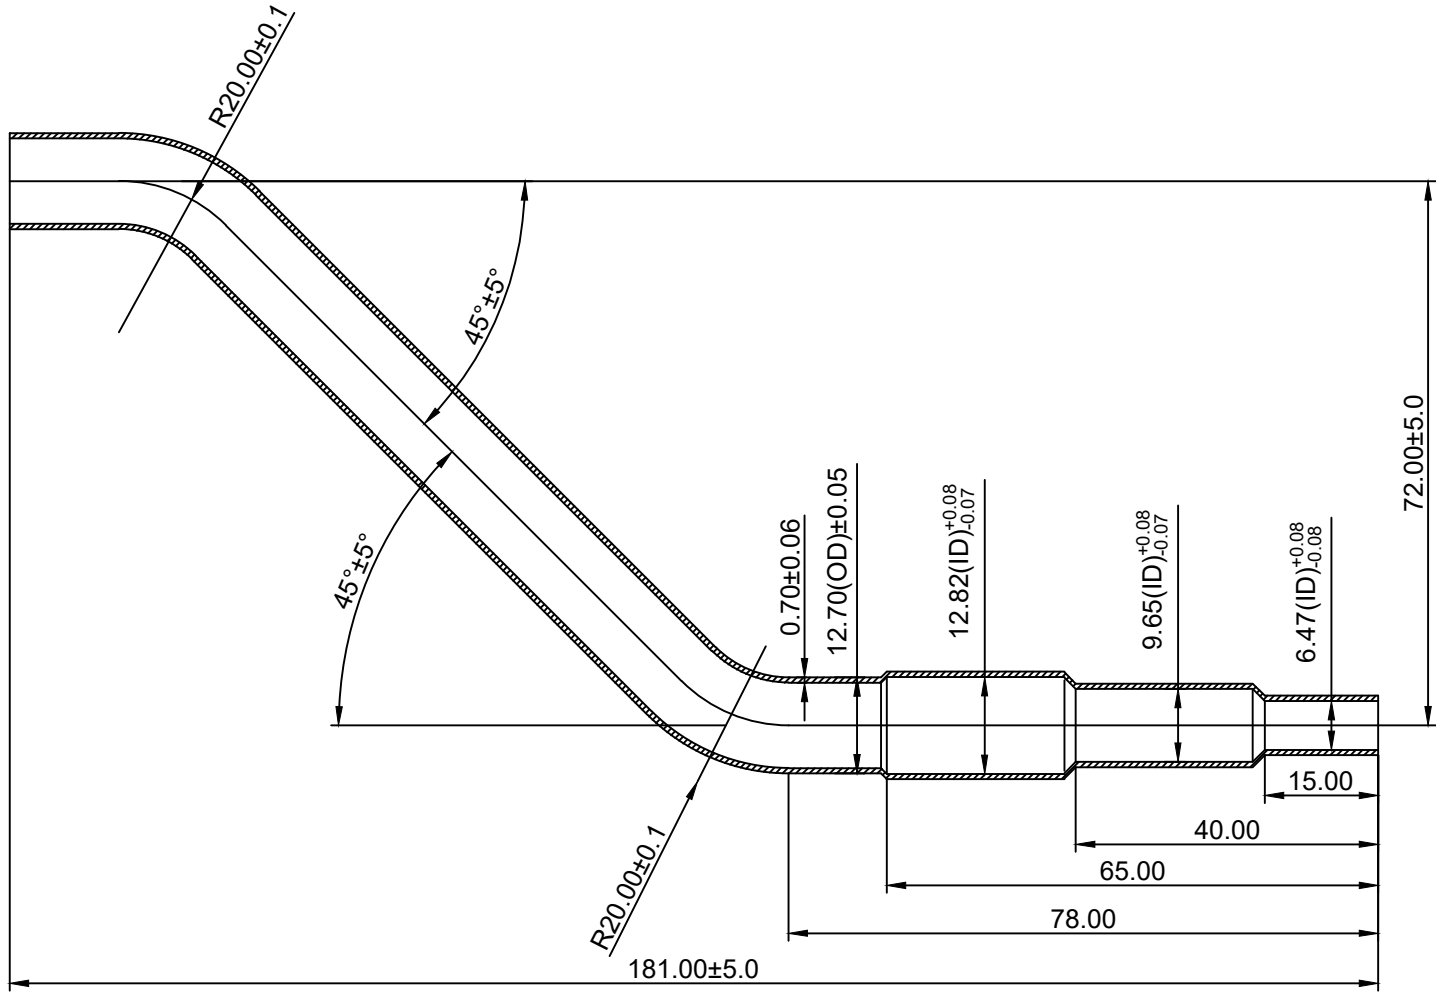

INSTRUCTIONS

- 1- The surface of the pipe connection parts must be scratch-free, smooth, and clean, and burrs are not allowed at the connection points.
- 2- The lower limit dimensions of the gauge must not be exceeded.
- 3- A length tolerance deviation of more than 2 mm is allowed under current conditions.

DRAWER

Gökay Baytok

EN12735-1

AKGÜN SOĞUTMA İÇ VE DIŞ TİC.LTD. ŞTİ.

Initial Inspection

Inspection

Technical Control

Product Approval

Final Approval

DATE

Ahmet Akgün

2024/10/15

Drawing Stage

Weight

No:002


/

Total Pages 9

Page 8

Branch Pipe KIT

CZ-P224BK2BM Bc

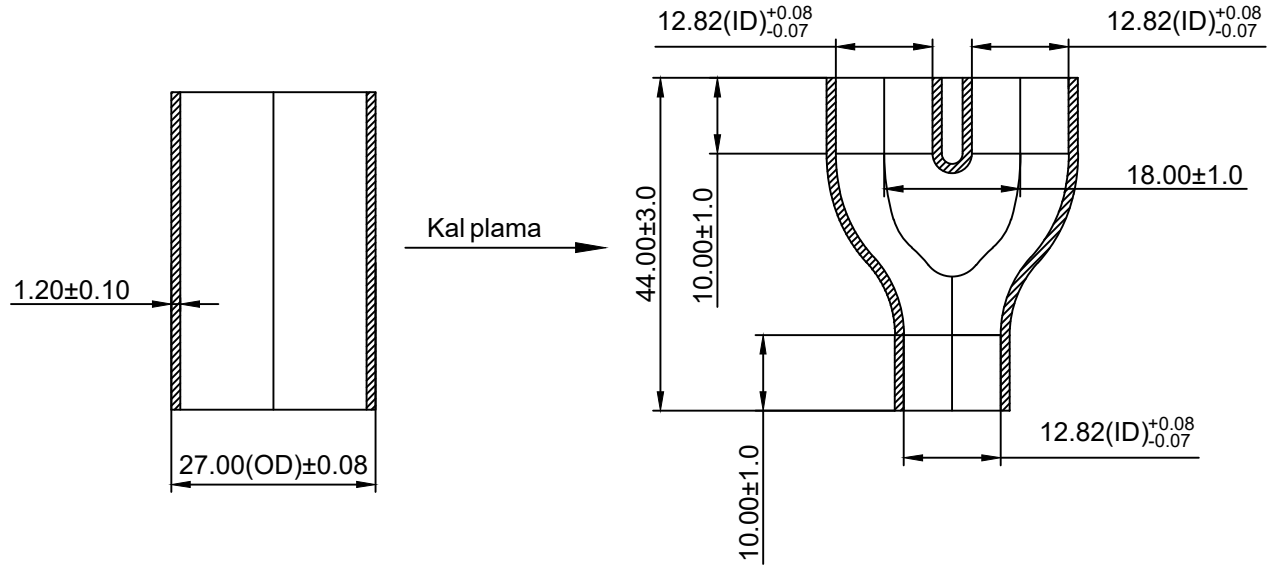

INSTRUCTIONS

- 1- The surface of the pipe connection parts must be scratch-free, smooth, and clean, and burrs are not allowed at the connection points.
- 2- The lower limit dimensions of the gauge must not be exceeded.
- 3- A length tolerance deviation of more than 2 mm is allowed under current conditions.

DRAWER

Gökay Baytok

EN12735-1

AKGÜN SOĞUTMA İÇ VE DIŞ TİC.LTD. ŞTİ.

Initial Inspection

Inspection

Technical Control

Product Approval

Final Approval

DATE

Ahmet Akgün

2024/10/15

Drawing Stage

Weight

No:002


/

Total Pages 9

Page 6

Branch Pipe KIT

CZ-P224BK2BM By

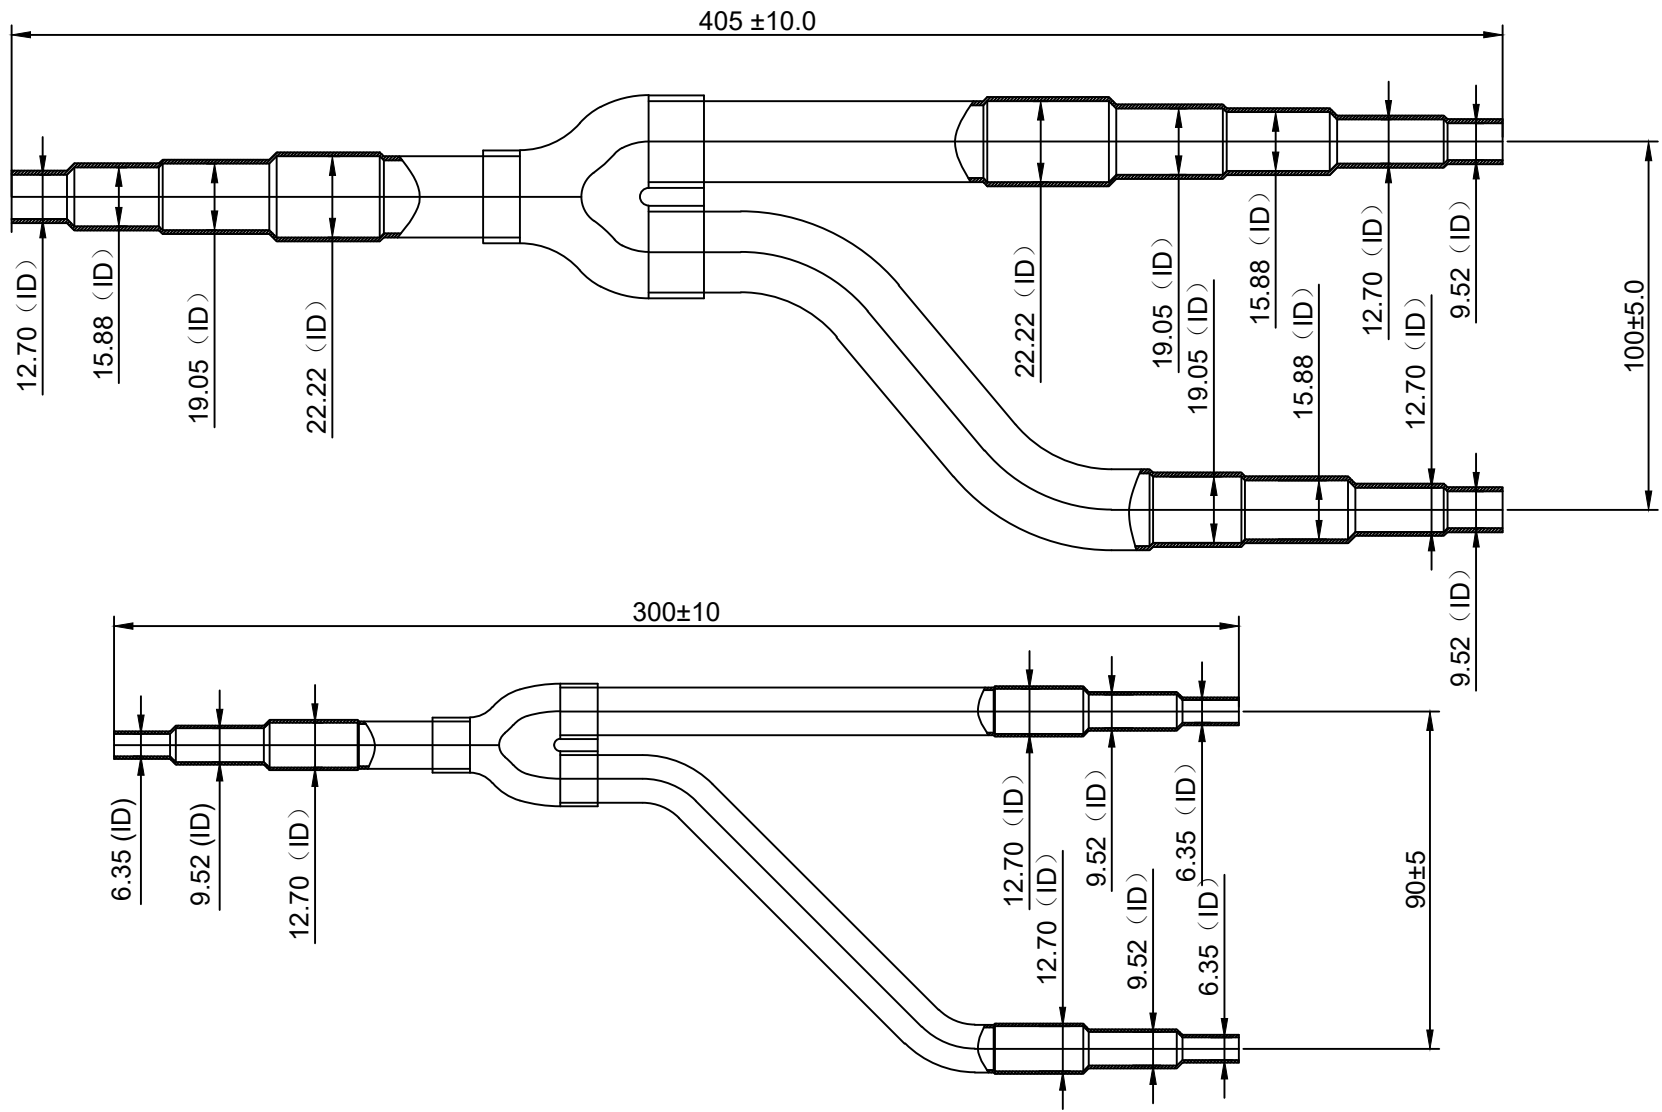

INSTRUCTIONS

- 1- The ends must be free of burrs.
- 2- There must be no air bubbles or welding defects in the weld.
- 3- The pipe body must comply with the technical drawing; incorrect angles or bending must not be present.
- 4- The pipe diameter must comply with standards.
- 5- This drawing is only technical drawing, does not include production notation.

DRAWER

Gökay Baytok

EN12735-1

AKGÜN SOĞUTMA İÇ VE DIŞ TİC.LTD. ŞTİ.

Initial Inspection

Inspection

Technical Control

Product Approval

Final Approval

DATE

Ahmet Akgün

2024/10/15

Drawing Stage

No:002

Total Pages 9

Weight

/

Page 9

Branch Pipe KIT

CZ-P224BK2BM