REF: AS/RM/F27 360 DEGREE SAFETY WALKABOUT CHECKLIST

Aircraft Registration:		**Aircraft Type:**		**Date:**	
Station:		**Parking/Bay:**		**TRC:**	
Arrival Flight No:		**Departure Flight No:**		**Ramp Officer:**	
Sector:		**Sector:**		**GSE Operator 1:**	
STA/ETA/ATA:		**STD/ETD/ATD:**		**GSE Operator 2:**	
Arrival PH Lead Officer		**Departure PH Lead Officer:**		**GSE Operator 3:**	
Additional Details/ (if any):					

IMPORTANT REMINDER:

- HAZARD REPORT shall be raised **immediately** for any identified hazard, risk, irregularities, non-compliance, incident/accident, injurie and damage.
- LAE or Technician on duty shall be notified **immediately** of any aircraft related incident/accident, obvious damage, fluid leakage, tyre damage, defective cargo door, unremoved pitot covers, and any other abnormalities observed on the aircraft.
- **No GSE should enter ERA** and surrounding area when staff performing **FOD check.**

REFER THE RELEVANT APPENDIX WHEN CARRY-OUT RESPECTIVE TASK:

- Appendix 1: Illustrations for Safety Cones Positions
- Appendix 2: Illustrations for Wheels Chock Placements
- Appendix 3: Illustrations for FOD Check Walk-About Pathway Surround and Within ERA

REMARKS:

- The table below defines elements that require supervision by individuals assigned to oversee ground handling operations.
- The primary task is to STOP all unsafe acts.
- Please take note that all actions listed below must be completed.
- Tick **"Y"** or "✓" in "Yes" column to indicate the conformance on each task completed.
- Tick **"N"** or **"X"** in "No" column to indicate the non-conformance or incomplete task.
  Note: *In this case, under the Remark column, Ramp Officer/Ramp Agent shall provide the main reason of the in-completed task and without any delay to immediately act for corrective measure in completing the task safely.*
- Mark "**N/A**" in "N/A" column to indicate that the task is not applicable and provide brief clarification under remarks column.

Phase (P)	Key	Safety Walkabout Activities (Reference to the Latest GOM)	In-Charge Personnel (ICP)	Yes	No	N/A	Remarks
P.1 Pre-Aircraft Arrival	**1.1**	Conduct Safety Briefing, Personal Protective Equipment (PPE), Airside Driving Permit (ADP), Airside Vehicle Permit (AVP) compliance check and update flight requirements.	**TRC/RO**				
	1.2	Ground Service Equipment (GSE) operator to perform 360-degree checks: a. All GSE positioned out of ERA and staff readily available 5 min prior to STA/ETA. b. GSE operators shall carryout 360-degree check of the GSE assigned prior to initial use, in particular the "parking" brakes, rubber protective bumpers, safety system, beacon light if applicable to GSE, and validity of FIREX. ***Note:*** *This 360-degree check shall also include motorized and non-motorized GSE. Any defect or abnormalities found must be communicated to the GSE Manager or officer-in-charge.*	**GEO/AHU**				
	1.3	Passenger Boarding Bridge (PBB) shall be: a. Fully retracted prior arrival. If drivable type, it is parked within its "Ramp Box" . b. Moved slowly to aircraft cabin access door c. Engaged using the auto levelling safety system d. Secured to prevent movement from non-authorised person	**TRC**				

REF: AS/RM/F27 360 DEGREE SAFETY WALKABOUT CHECKLIST

Phase (P)	Key	Safety Walkabout Activities (Reference to the Latest GOM)	In-Charge Personnel (ICP)	Yes	No	N/A	Remarks
	1.4	Sufficient chocks and cones for aircraft type, are in good conditions and available on stand.	TRC/RO/GEO/ AHU				
	1.5	Conduct **1st Foreign Object Debris (FOD) check** 10 minutes prior to aircraft arrival at parking bay Equipment Restraint Area (ERA) as per the FOD Check SOP.	ALL (Led by TRC & RO)				
	1.6	Headset man readily available in position prior to STA/ETA and VDGS activated or Aircraft Marshaller equipped with appropriate hand signal equipment in position in case no VDGS available.	AHU				
P.2 **Aircraft Arrival at the Gate**	2.1	Staff/PBB/GSE stay clear of ERA and wait until the aircraft has come to a complete stop, chocks are inserted at Nose Landing Gear, anti-collision light has been switched-off, engines spooled-down and "all clear" given by Aircraft Marshaller before approaching.	ALL				
	2.2	Aircraft chocks and cones positioned as per procedure.	GEO				
	2.3	360 walkabout check - Inspect the areas surrounding the cargo door for scratches, dents, or other damage prior to opening and after closing. Report any abnormalities or damage through the Hazard Reporting System in accordance with company procedures.	RO/TRC				
	2.4	Provide **1st thumbs-up** to PBB operator to connect PBB to aircraft.	AHU				
	2.5	Provide **2nd thumbs-up** to GSE operator for GSE movements to approach aircraft. No GSE shall approach the aircraft until all chocks and cones are safely placed.	TRC				
	2.6	Only authorized personnel to open cargo door and/or to operate GSE and 'No touch policy' is strictly adhered for all ground equipment's attached to aircraft except for PBB.	RO/AHU				
	2.7	GSE positioning checks to include below: a. Marshall **must be** available at all time to guide the GSE approach to aircraft b. 5 km/h max speed (not faster than normal walking speed) c. **1st brake** check of **5 meters** away, followed by d. **2nd brake** check of **2 meters** away from the aircraft. e. Guard rails lowered. f. Ensure compliance to "No Touch Policy". g. GSE is not to be placed under aircraft doors/evacuation points in a position to prohibit the deployment of slides. h. GSE is not blocking the emergency egress of the fuel truck or other vehicles on the ramp	GEO/RO				
	2.8	The aerobridge or stairs are in positioned at the cabin door before the aircraft door is open.	PBBO				
	2.9	Secure passenger movement on the ramp between aircraft, bus and terminal during remote bay operations.	PH				
	2.10	Unloading of baggage and cargo to follow procedure and sequence as guided by LDM/CPM to avoid incident such as aircraft tipping.	RO				

REF: AS/RM/F27 360 DEGREE SAFETY WALKABOUT CHECKLIST

Phase (P)	Key	Safety Walkabout Activities (Reference to the Latest GOM)	In-Charge Personnel (ICP)	Yes	No	N/A	Remarks
	2.11	All unload baggage to be counted by piece and reconciled with the recorded number of baggage in LDM/CPM.	**RO**				
	2.12	Upon completion of unloading, cargo holds and ULDs to be Inspected, damage reported (if any) and ensure FAK is available and securely lashed.	**TRC/RO**				
	2.13	Water/lavatory/catering truck properly marshalled and shall be chocked, and stabilizer deployed accordingly prior to commencement of activities. The transfer bridge for hi-lift operations must be straight, firmly placed and handrails extended from hi-lift container.	**AHU/CAT**				
	2.14	Fuel bowser properly positioned, ensure grounding is secured and bowser escape route not obstructed.	**FUELER / TRC**				
P.3 Aircraft Turnaround / Pre-Departure	**3.1**	GSE positioning checks to include below: a. Marshall must be available at all time to guide the GSE approach to aircraft b. 5 km/h max speed (not faster than a normal walking speed) c. **1st brake** check of **5 meters** away, followed by d. **2nd brake** check of **2 meters** away from the aircraft. e. Guard rails lowered f. Ensure compliance to "No Touch Policy". g. GSE is not to be placed under aircraft doors/evacuation points in a position to prohibit the deployment of slides. h. GSE is not blocking the emergency egress of the fuel truck or other vehicles on the ramp	**GEO**				
	3.2	LIR readily available and the latest version to be used prior to commencement of loading.	**RO**				
	3.3	All onload baggage to be counted by piece and reconciled with the recorded number of baggage in DCS system via scanner or container record card (CRC).	**RO**				
	3.4	Prior to loading of ULDs onto aircraft, the following checks shall be carried out ensure that: a. All relevant documents and special instructions for the applicable flight received as per MH procedures. b. No nets, ropes, straps, protective materials, can drag on the ground or get tangled or jammed in rollers, ball-mats or wheels. c. All built-up cargo/mail/baggage is safe to move and will not shift, roll or topple. d. No evidence of spillage or leakage from the load. e. No evidence of damage to the packing material and cargo load. f. No evidence of tampering (cuts, tears of plastic foil, etc.) to the load. g. No visually detectable distortion/damage to the ULD's. h. No build up/absence of contamination (including snow, water, ice) on ULD's and bulk loads. i. The ULD container curtains door(s), nets are closed/latched and secured properly.	**RO**				

REF: AS/RM/F27 360 DEGREE SAFETY WALKABOUT CHECKLIST

Phase (P)	Key	Safety Walkabout Activities (Reference to the Latest GOM)	In-Charge Personnel (ICP)	Yes	No	N/A	Remarks
		j. Protective tarpaulin/plastic sheet used to cover/protect ULD's/ loads, in wet weather/precipitation, is removed prior to loading into the aircraft. k. The contour of the ULD pallet is correct and shows no obvious signs of shifting/collapsing. l. ULD pallet nets and straps are correctly tensioned within the allowable limit between 5 and 7.5 cm (2 to 3 inch) by hand. m. No edges of the pallet are bent upwards. n. No "Cargo Aircraft Only" shipment for passenger aircraft. o. Special attention to be given to oversized cargo, protruding cargo, overhang cargo and merged pallet.					
	3.5	Any baggage, cargo or mail damage, spillage, contamination, etc., to report immediately to TRC for further action.	**RO**				
	3.6	Cargo Load Manifest, UWS, AWB and all relevant documents are available and kept in the Cargo document. The document shall be loaded in Bulk Hold.	**Cargo RO**				
	3.7	TRC/RO to ensure that the potable water is sufficient for the flight.	**TRC/RO**				
	3.8	TRC/RO to ensure that the toilet servicing is completed.	**TRC/RO**				
P.4 Loading	**4.1**	While loading cargo/ULDs into the aircraft, ensure the following is checked: a. Loading is done in accordance with LIR. In case of loading requires deviation from LIR, RO must inform CLC or Station CLC Coordinator (SCC) to liaise with Load Control for rearrangement. b. Protective tarpaulin/plastic sheet used to protect aircraft floor if carrying wet cargo (e.g., Live, wet or frozen seafood). c. Follow "This Side Up" orientation as per the label. d. Cargo stack up in B737-800 does not exceed the marking for maximum cargo loading height. e. Minimum gap of two (2) inches from the top cargo compartment ceiling must be maintained. f. No "Cargo Aircraft Only" being loaded into passenger aircraft. g. No Dangerous goods are being carried in aircraft cabin EXCEPT as permitted by Authority / MAB h. Ensure AVI cage is properly secured and latched.	**TRC/RO**				
P.5 Post-Loading	**5.1**	Perform physical inspection of all loads to ensure that: a. No unprotected protruding cargo left unsecured. b. No cargo or baggage stacked up exceeding the marking of maximum cargo loading height.	**RO**				
	5.2	Final LIR is produced and signed by RO.	**RO**				
	5.3	NOTOC is produced for special loads and acknowledge and/or signed by Pilot in Command.	**RO**				
	5.4	Printed Electronic NOTOC to be produced for DGR shipment if any and to obtain Pilot in Command acknowledgement / signature.	**RO**				

REF: AS/RM/F27 360 DEGREE SAFETY WALKABOUT CHECKLIST

Phase (P)	Key	Safety Walkabout Activities (Reference to the Latest GOM)	In-Charge Personnel (ICP)	Yes	No	N/A	Remarks
P.6 Aircraft Departure	**6.1**	AIC team leader to report the required information to TRC upon completion of cabin cleaning.	**AIC**				
	6.2	Baggage, mail and/or cargo commodities correctly loaded and securely handled as per LIR.	**RO**				
	6.3	All special loads (AVI, PER, HUM, DGR, Diplomatic Cargo/Mail and security handling shipment including firearm and VAL etc.) loaded, secured and stowed as per SOP.	**RO**				
	6.4	Final inspection to be carried out on the serviceability of locks/nets/lashes upon completion of loading.	**RO**				
	6.5	Final cargo load confirmation with load control (if applicable).	**RO/LC**				
	6.6	ULD to be inspected from any damage prior loading into an aircraft. If damage found, immediately report to TRC / Ramp officer. For palletized cargo, Loaders to check	**RO**				
	6.7	All GSE equipment safely removed out of ERA upon completion of activities.	**GEO**				
	6.8	Tow tug and tow bar (suitable for the aircraft type) positioned at bay 10 min prior to STD.	**AHU**				
	6.9	Gate staff to communicate with TRC 10 min prior to STD to inform on gate items and/or any A17 cases.	**PH**				
	6.10	Conduct **2nd FOD check** (after all service and cargo door closed and prior to aircraft pushback) upon completion of Ramp activities and ensure that the ramp surface area is inspected, and area is safe for operations.	**RO**				
	6.11	TRC, RO, or Headset Man shall verify that all pitot covers are removed and that the pitot probes are free of foreign objects during the pre-departure walkaround prior to aircraft departure.	**TRC/RO/HSM**				
	6.12	All personnel to exit ERA except wing walker/s and headset operator	**All**				
	6.13	Ensure all cable/hose connected to the aircraft are properly removed or disconnected. (e.g., GPU, ACU)	**RO/GO/ PBBO**				
	6.14	Aircraft servicing panels and/or hatches are closed and secured (except external power and headset panel)	**RO / TRC**				
	6.15	Aircraft cabin and cargo doors are closed, and handles are flush with the fuselage;	**RO / TRC**				
	6.16	Maximum aircraft nose gear not exceeded and standard verbal communication is used between ground and flight crew.	**GEO / AHU**				
	6.17	Ensure landing gear safety pins are removed.	**GEO / AHU**				
	6.18	Chocks and towing equipment removal procedures as per SOP.	**GEO**				

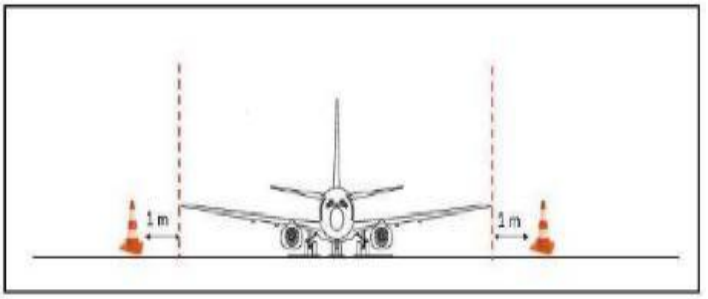
REF: AS/RM/F27 360 DEGREE SAFETY WALKABOUT CHECKLIST

P.7 Post-Aircraft Departure	**7.1**	Conduct **3rd FOD check** immediately after aircraft pushback activities completed.	**RO**				
	7.2	Chocks and cones positioned at designated area.	**GEO**				
	7.3	All GSE, ULDs and other lose ground equipment (e.g. chocks, cones, FIREX and other aerodrome safety and rescue emergency equipment) are removed from ERA and properly parked at designated area.	**GO/RO/TRC**				

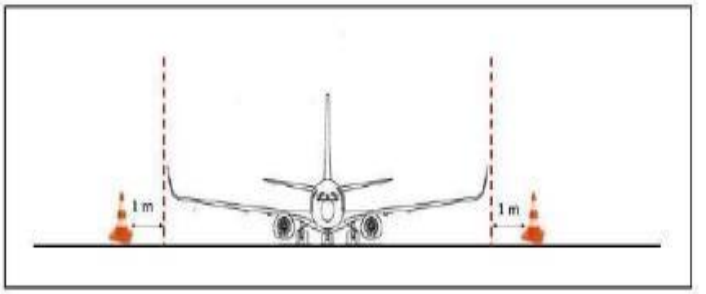
Remarks:	**I hereby certify that all the above checks have been performed:** **(Ground Handler Personnel)** **Signature:** _____ **Name:** _____ **Designation:** _____	**I hereby certify that all the information provided above has been verified.** **(Station Head)** **Signature:** _____ **Name:** _____ **Designation:** _____

APPENDIX 1: ILLUSTRATIONS FOR SAFETY CONES POSITIONS DURING NORMAL OPERATIONS

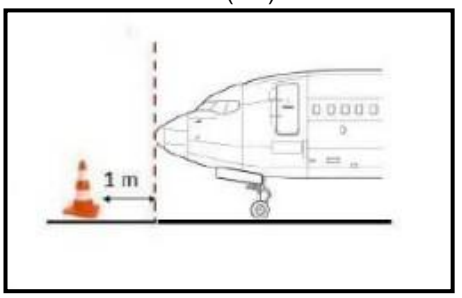
Cones maximum 1 m (3 ft) from wingtips



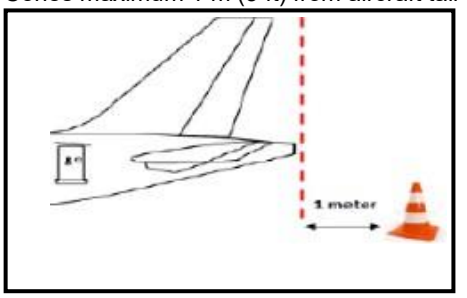
Cones maximum 1 m (3 ft) from winglets

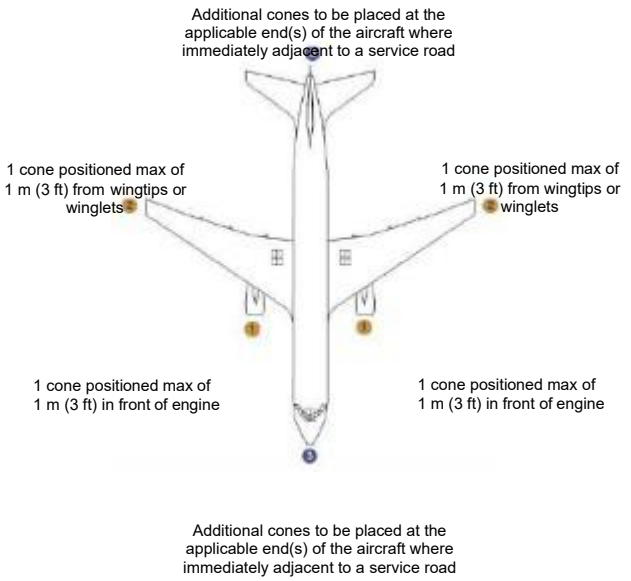
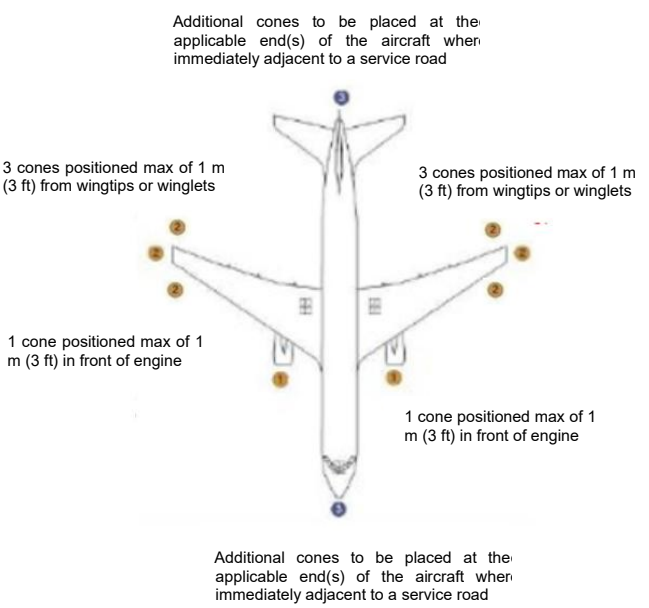


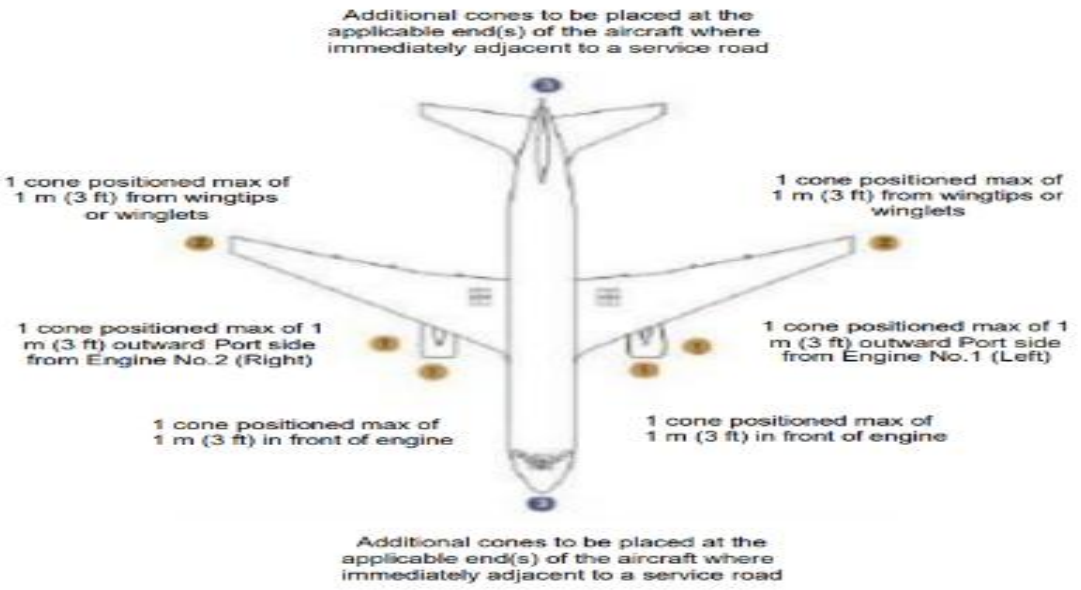
Cones maximum 1 m (3 ft) from aircraft nose



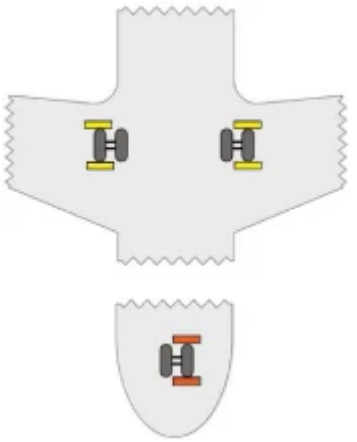
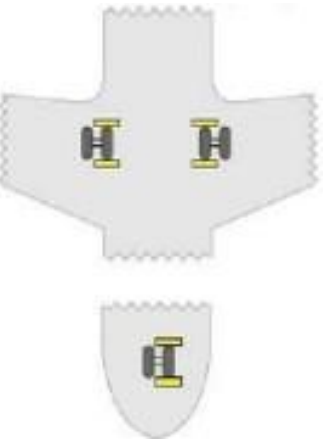
Cones maximum 1 m (3 ft) from aircraft tail



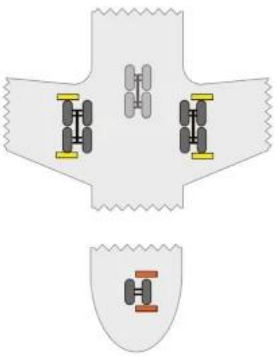
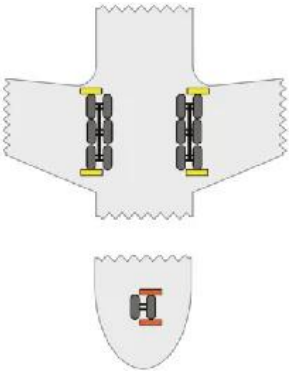
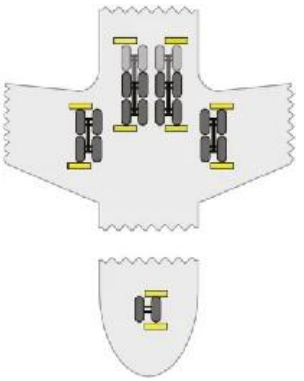
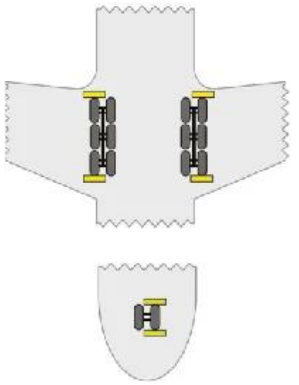
Safety Cones Positions for Narrow-Body Twin Engines Aircraft (B738)	Safety Cones Positions for Narrow-Body Twin Engines Aircraft (B737-8)
	

Safety Cones Positions for Wide-Body Twin Engines Aircraft (A332, A332F,A333, A359)


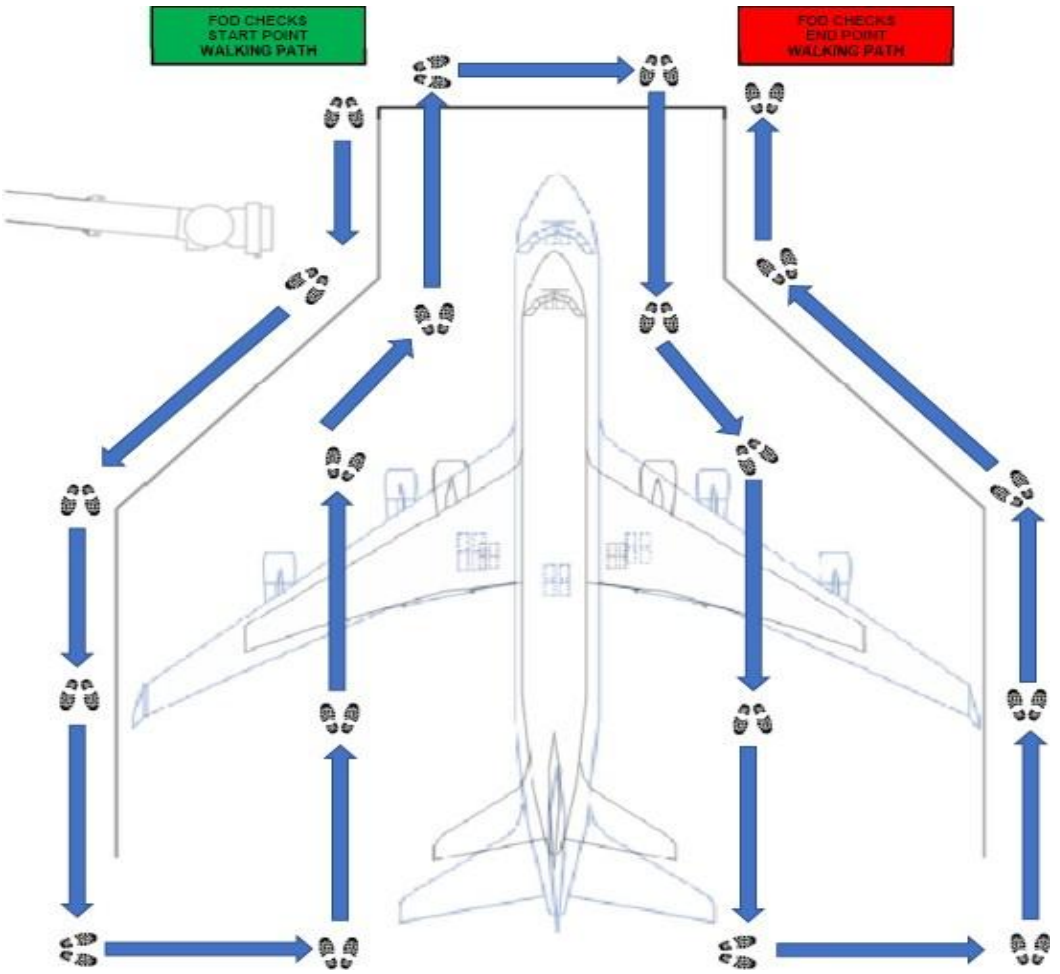
APPENDIX 2: ILLUSTRATIONS FOR WHEELS CHOCK PLACEMENTS

Normal Operation	Parking Aircraft Out-of-Service / Night Stop / High Wind / Adverse Weather / Winter or Slippery Apron Conditions
Aircraft with Single Axle Main-Gear Bogie (Applicable for B737)	**Aircraft with Single Axle Main-Gear Bogie (Applicable for B737)**
	

REF: AS/RM/F27 360 DEGREE SAFETY WALKABOUT CHECKLIST

Normal Operation		Parking Aircraft Out-of-Service / Night Stop / High Wind / Adverse Weather / Winter or Slippery Apron Conditions	
Aircraft with Double Axle Main-Gear Bogie – also applies with Center Bogie (Applicable for A330, A350)	**Aircraft with Triple Axle Main-Gear Bogie**	**Aircraft with Double Axle Main-Gear Bogie – also applies with Center Bogie (Applicable for A330, A350)**	**Aircraft with Triple Axle Main-Gear Bogie**
			

APPENDIX 3: ILLUSTRATIONS FOR FOD CHECK WALK-ABOUT PATHWAY SURROUND AND WITHIN ERA



Note: *No GSE should enter ERA and surrounding area when staff performing FOD check.*