


Output:

1) Network setup:

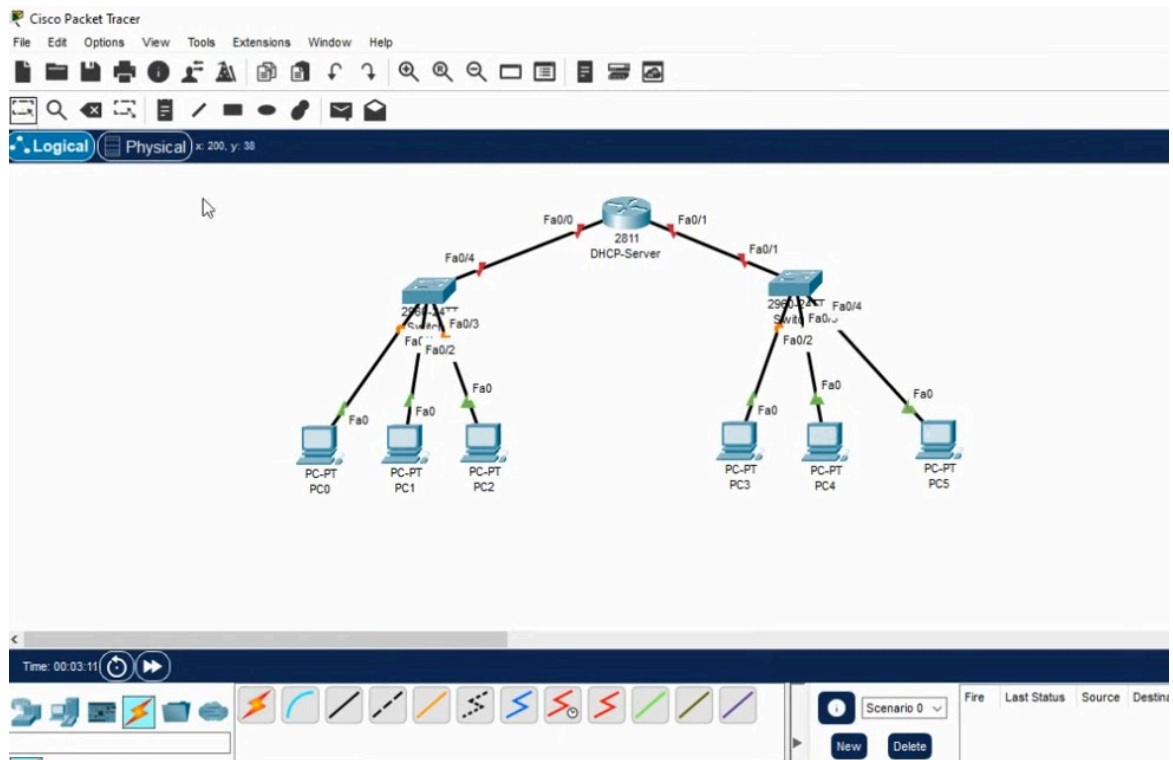

2) Router configuration:

```
DHCP-Server
Physical Config CLI Attributes
IOS Command Line Interface

Press RETURN to get started!

Router>
Router>
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#
Router(config)#
Router(config)#host
Router(config)#hostname dhcp-server
dhcp-server(config)#int f0/0
dhcp-server(config-if)#ip add 192.168.1.1 255.255.255.0
dhcp-server(config-if)#no sh

dhcp-server(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
```

3) DHCP server configuration:

```
DHCP-Server
Physical Config CLI Attributes
IOS Command Line Interface

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to u

dhcp-server(config-if)#
dhcp-server(config-if)#int f0/1
dhcp-server(config-if)#ip add 192.168.2.1 255.255.255.0
dhcp-server(config-if)#no sh

dhcp-server(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to u

dhcp-server(config-if)#
dhcp-server(config-if)#exit
dhcp-server(config)#
dhcp-server(config)#
dhcp-server(config)#do sh ip int br
Interface                IP-Address      OK? Method Status          Protocol
FastEthernet0/0          192.168.1.1     YES manual up              up
FastEthernet0/1          192.168.2.1     YES manual up              up
Vlan1                    unassigned      YES unset  administratively down down
dhcp-server(config)#
dhcp-server(config)#
```

```
DHCP-Server
Physical Config CLI Attributes
IOS Command Line Interface

dhcp-server(config)#
dhcp-server(config)#
dhcp-server(config)#ip dhcp pool 192.168.1.1
dhcp-server(dhcp-config)#net
dhcp-server(dhcp-config)#network 192.168.1.0 255.255.255
^
% Invalid input detected at '^' marker.

dhcp-server(dhcp-config)#network 192.168.1.0 255.255.255.0
dhcp-server(dhcp-config)#de
dhcp-server(dhcp-config)#default-router 192.168.1.1
dhcp-server(dhcp-config)#dns-ser
dhcp-server(dhcp-config)#dns-server 8.8.8.8
dhcp-server(dhcp-config)#exit
dhcp-server(config)#ip dh
dhcp-server(config)#ip dhcp po
dhcp-server(config)#ip dhcp pool 192.168.2.1
dhcp-server(dhcp-config)#net
dhcp-server(dhcp-config)#network 192.168.2.0 255.255.255.0
dhcp-server(dhcp-config)#def
dhcp-server(dhcp-config)#default-router 192.168.2.1
dhcp-server(dhcp-config)#dns
dhcp-server(dhcp-config)#dns-server 8.8.8.8
dhcp-server(dhcp-config)#
```

4) IP configuration:

PC0

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address 192.168.1.2

Subnet Mask 255.255.255.0

Default Gateway 192.168.1.1

DNS Server 8.8.8.8

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address

Link Local Address FE80::202:4AFF:FE81:E004

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Top

PC3

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address 192.168.2.2

Subnet Mask 255.255.255.0

Default Gateway 192.168.2.1

DNS Server 8.8.8.8

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address

Link Local Address FE80::290:CFF:FEA7:4943

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security


Authentication MD5

Username

Password

Top

5) Connection establishment:

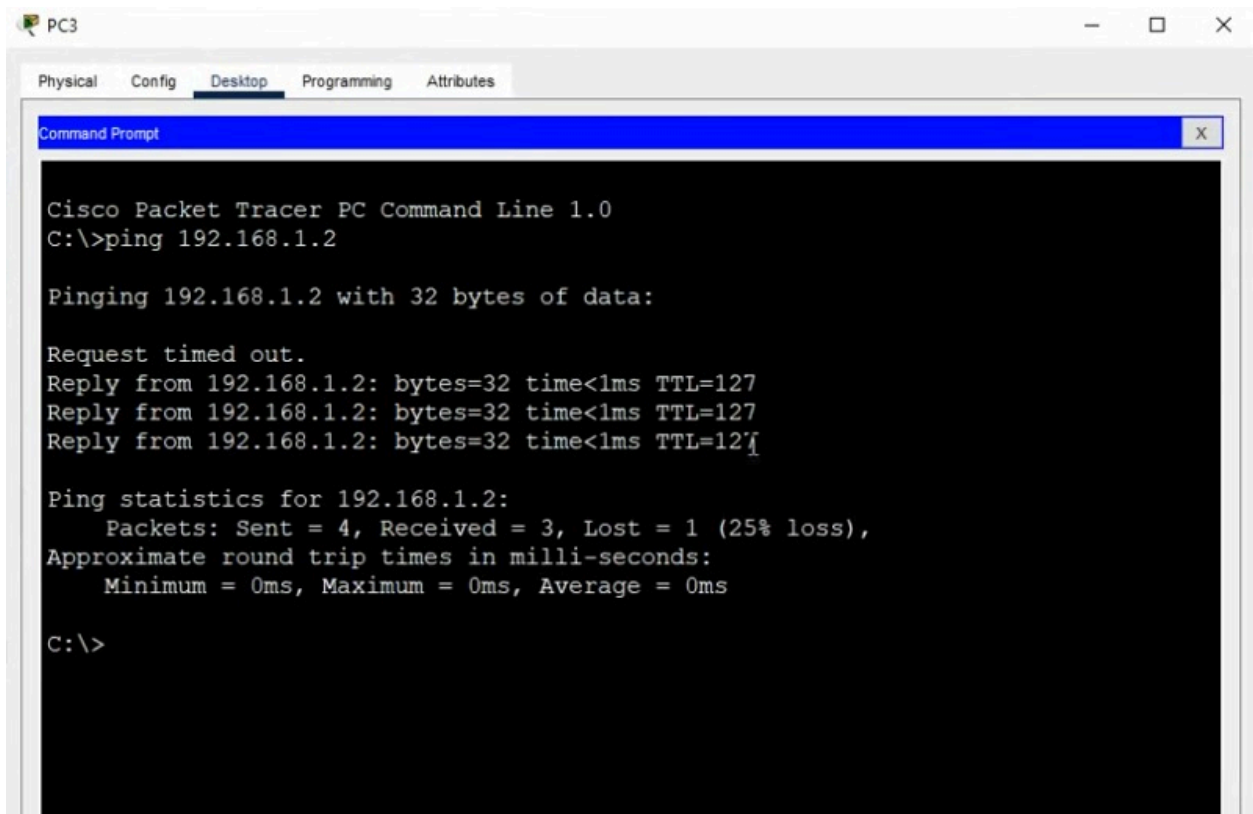

The screenshot shows a Cisco Packet Tracer PC Command Line window for PC3. The window has tabs for Physical, Config, Desktop, Programming, and Attributes, with Desktop selected. The Command Prompt window displays the following text:

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.1.2: bytes=32 time<1ms TTL=127
Reply from 192.168.1.2: bytes=32 time<1ms TTL=127
Reply from 192.168.1.2: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```