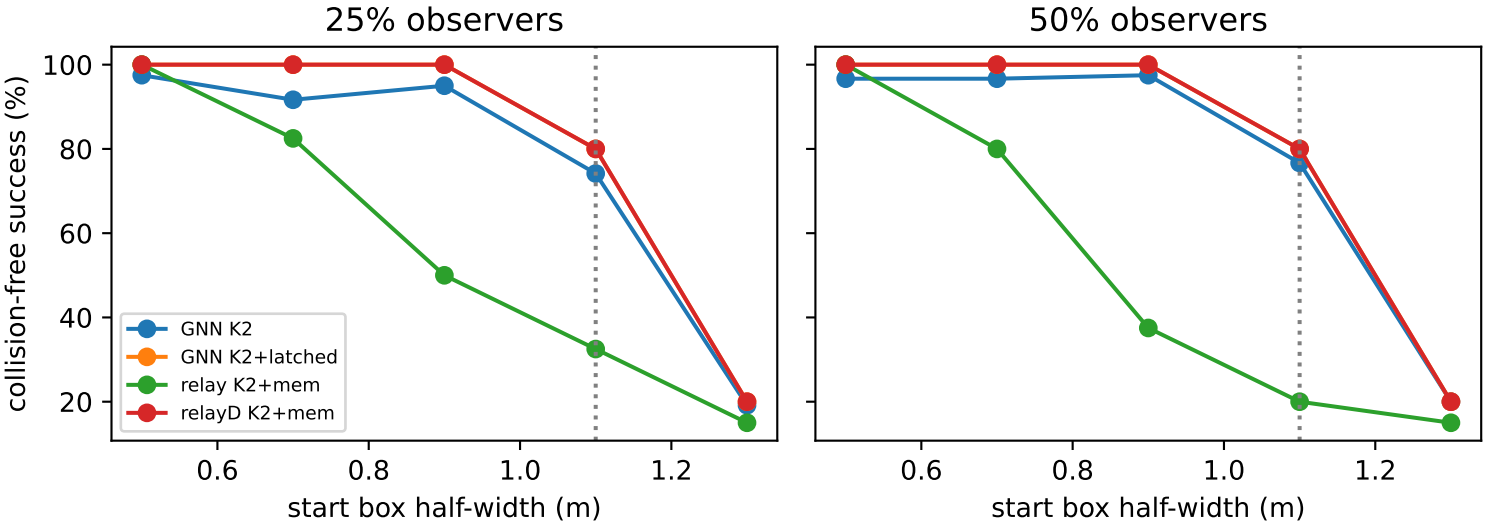
25% observers
50% observers
collision-free success (%)
100
80
60
40
20
0.6
0.8
1.0
1.2
start box half-width (m)
GNN K2
GNN K2+latched
relay K2+mem
relayD K2+mem