


Engine Cummins 6BTAA5.9-C178-II Gross Power 133 kW (178 hp / 181 ps) @ 2,000 rpm Net Power 125 kW (168 hp / 170 ps) @ 2,000 rpm Maximum Dig Depth 14,815 mm Standard Bucket Capacity 0.4 m 3 Operating Weight 28,000 kg

925E EXCAVATOR LONG REACH ARM

925E SPECIFICATIONS

Tier 2 / Stage II
Cummins
6BTAA5.9-C178-II
133 kW (178 hp / 181 ps) @ 2,000 rpm
125 kW (168 hp / 170 ps) @ 2,000 rpm
708 N·m @ 1,500 rpm
6
5.9 L

UNDERCARRIAGE	
Shoe Width	800 mm
Number of Shoes, Each Side	51
Upper Rollers, Each Side	2
Bottom Rollers, Each Side	9

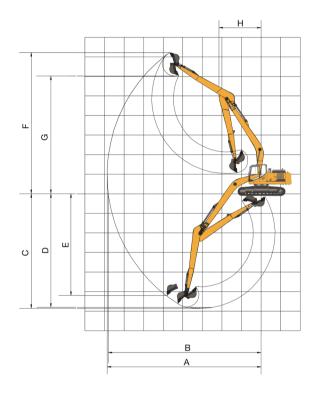

ARM & BOOM REFERENCE	
Arm Length	8,000 mm
Boom Length	10,350 mm
DUOVET DEDEODITATION	
BUCKET PERFORMANCE	
Bucket Heaped Capacity (Referenced)	0.4 m ³

TRACK DRIVE	
Maximum Travel Speed	5.8 km/h
Drawbar Pull	229 kN

SWING SYSTEM	
Swing Speed	12 rpm

SERVICE CAPACITIES	
Fuel Tank	470 L
Engine Oil	25 L
Cooling System	25 L
Hydraulic Reservoir	210 L
Hydraulic System Total	330 L

HYDRAULIC SYSTEM	
Main Pumps Total Flow	480 L/min
Relief Pressure, main	34.3 MPa
Relief Pressure, boost	37.3 MPa

WORKING RANGE	
A. Max. digging reach	18,365 mm
B. Max. digging reach on ground	18,265 mm
C. Max. digging depth	14,815 mm
D. Max. digging depth, 2.44 m (8') level	14,600 mm
E. Max. vertical wall digging depth	12,675 mm
F. Max. cutting height	14,030 mm
G. Max. dumping height	11,925 mm
H. Min. front swing radius	5,970 mm

