

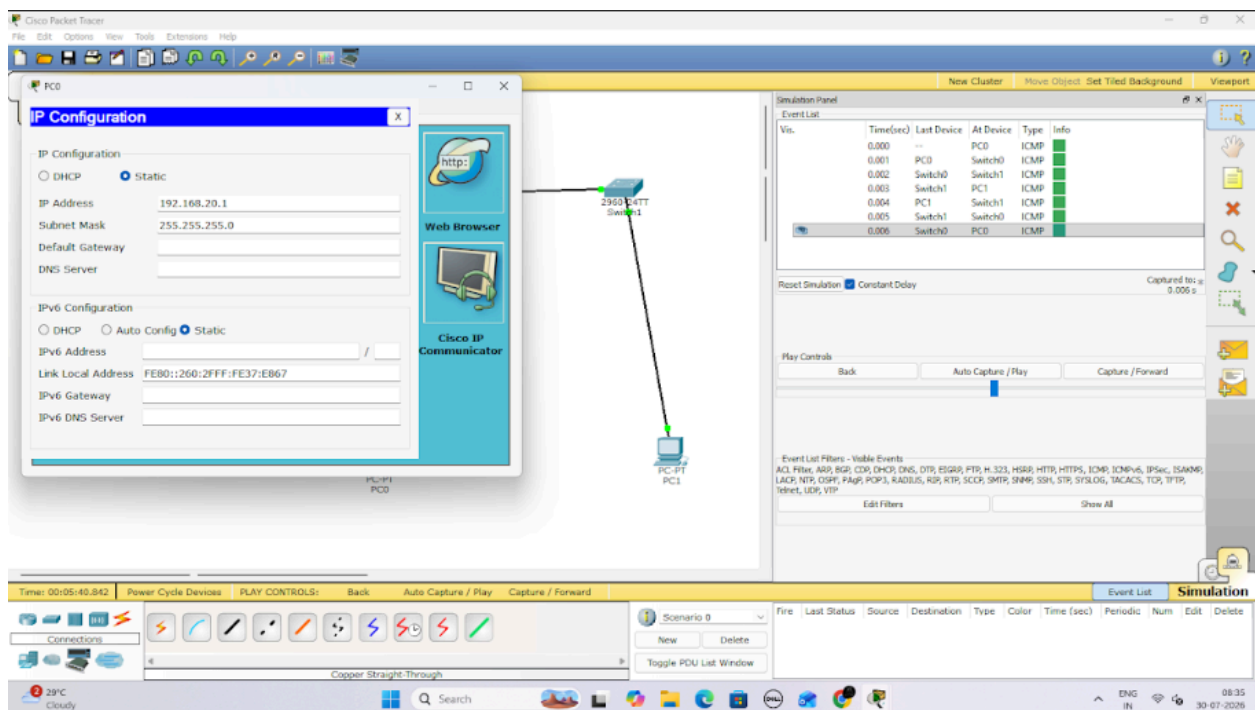
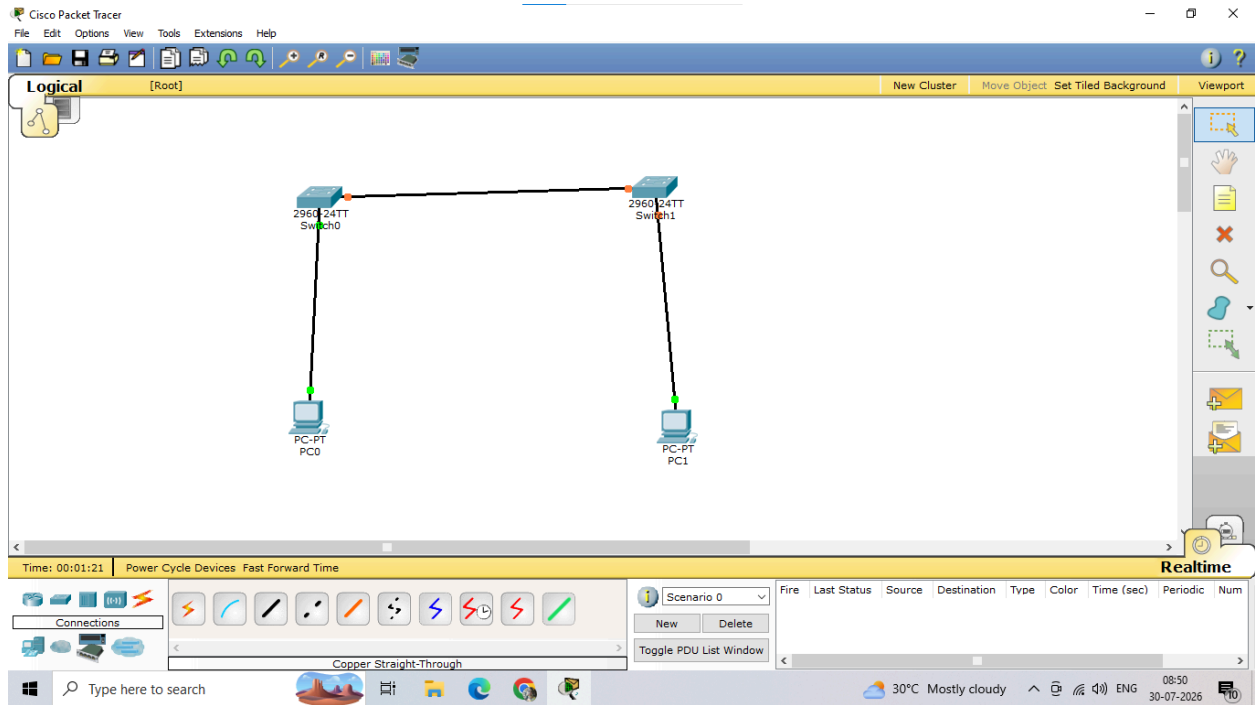


PRACTICAL NO: 5

AIM:Simulation of CSMA/CA MAC Protocol : Implement CSMA/CA protocol simulation and evaluate collision avoidance mechanisms.

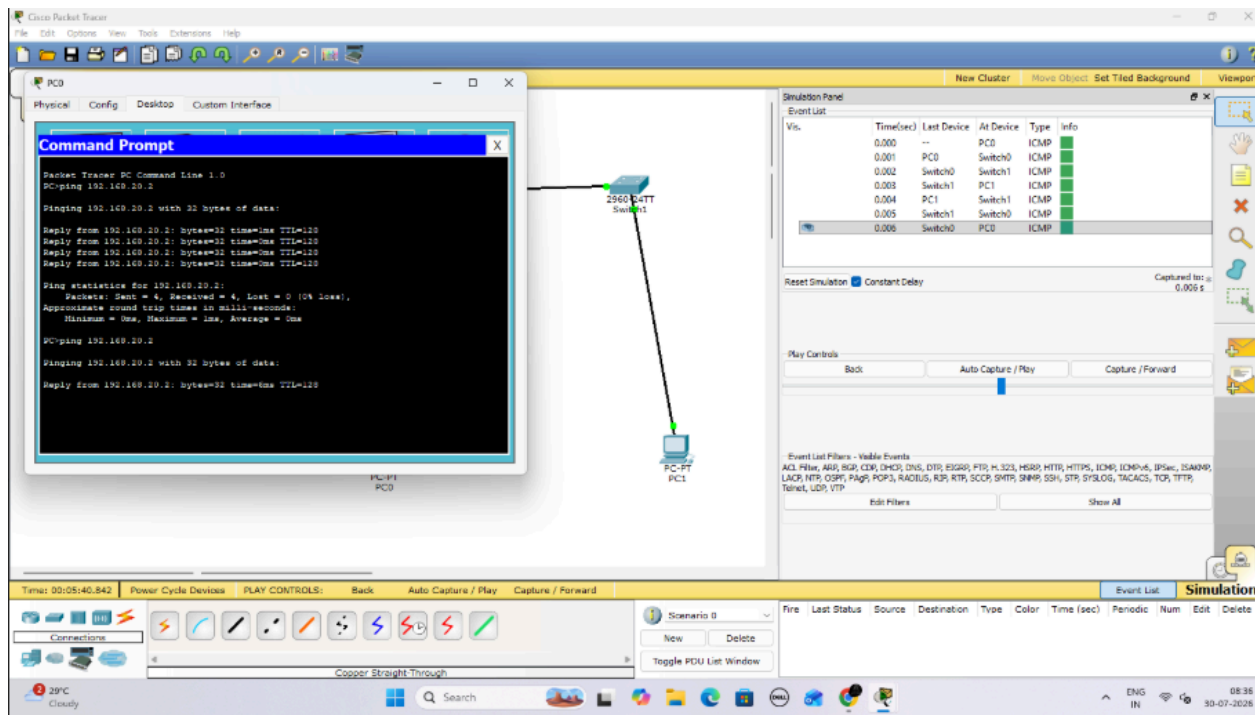

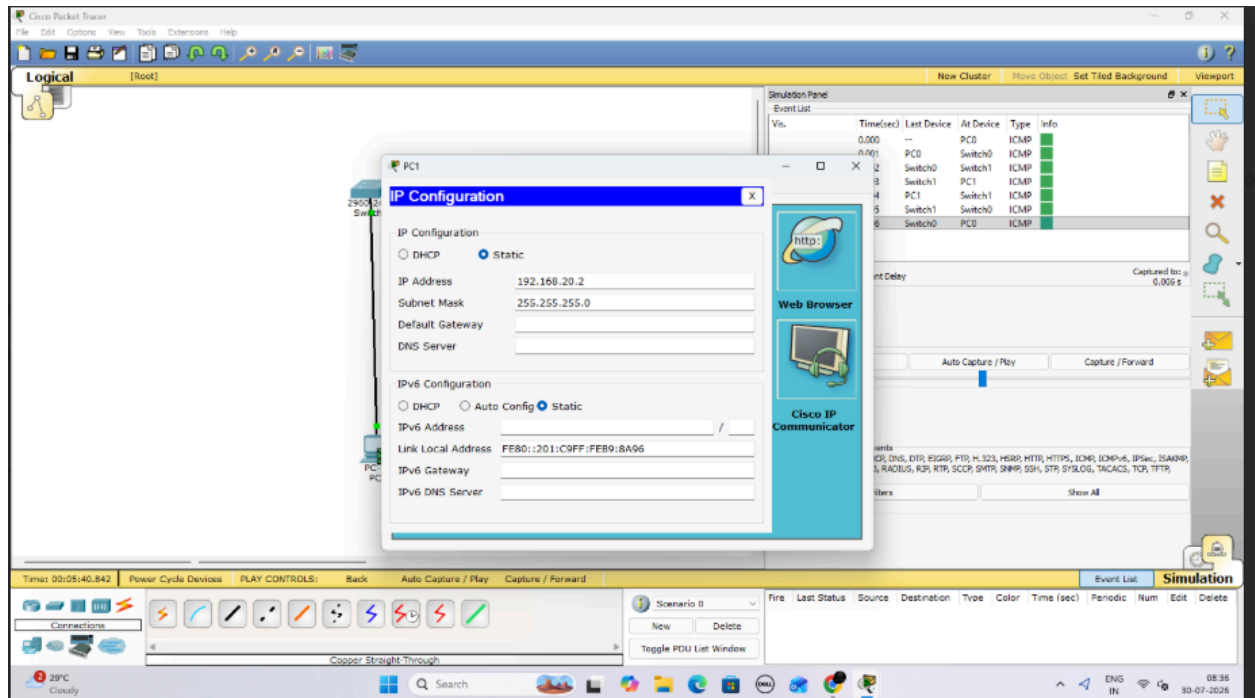

Cisco Packet Tracer

File Edit Options View Tools Extensions Help

Logical [Root]

Simulation Panel

Event List

Time(sec)	Last Device	At Device	Type	Info
0.000	--	PC0	ICMP	
0.001	PC0	Switch0	ICMP	
0.002	Switch0	Switch1	ICMP	
0.003	Switch1	PC1	ICMP	
0.004	PC1	Switch1	ICMP	
0.005	Switch1	Switch0	ICMP	
0.006	Switch0	PC0	ICMP	

Reset Simulation Constant Delay Captured to: 0.006 s

Play Controls: Back Auto Capture / Play Capture / Forward

Event List Filters - Visible Events

ACL, Filter, ARP, BGP, CDP, DHCP, DNS, DTLS, EIGRP, FTP, H.323, HSRP, HTTP, HTTPS, ICMP, ICMPv6, IPsec, ISAKMP, LACP, NTP, OSPF, PAgP, POP3, RADIUS, RDP, RTP, SCCP, SMTP, SNMP, SSH, STP, Syslog, TACACS, TFTP, Telnet, UDP, VTP

Edit Filters Show All

Time: 00:05:40.842 Power Cycle Devices PLAY CONTROLS: Back Auto Capture / Play Capture / Forward

Connections

Copper Straight-Through

Scenario 0

New Delete

Toggle PDU List Window

ENG IN 08:36 30-07-2026

Cisco Packet Tracer

File Edit Options View Tools Extensions Help

Logical [Root]

Simulation Panel

Event List

Time(sec)	Last Device	At Device	Type	Info
0.000	--	PC0	ICMP	

Reset Simulation Constant Delay Captured to: 0.000 s

Play Controls: Back Auto Capture / Play Capture / Forward

Link IP Address IPv6 Address MAC Address

Port FastEthernet0 Up 192.168.20.1/24 <not set> 0001.C1B5.650C

Gateway: <not set>
DNS Server: <not set>
Line Number: <not set>

Physical Location: Intercity, Home City, Corporate Office, Main Wiring Closet

Time: 00:05:50.820 Power Cycle Devices PLAY CONTROLS: Back Auto Capture / Play Capture / Forward

Connections

Copper Straight-Through

Scenario 0

New Delete

Toggle PDU List Window

ENG IN 08:37 30-07-2026

The image displays two screenshots of the Cisco Packet Tracer software interface, showing a network simulation setup and its execution.

Top Screenshot: The network topology consists of two 2950 24TT switches (Switch0 and Switch1) connected by a line. Each switch is connected to a PC (PC0 and PC1). The Simulation Panel on the right shows the Event List with the following data:

Time(sec)	Last Device	At Device	Type	Info
0.000	--	PC0	ICMP	
0.001	PC0	Switch0	ICMP	
0.002	Switch0	Switch1	ICMP	
0.003	Switch1	PC1	ICMP	
0.004	PC1	Switch1	ICMP	
0.005	Switch1	Switch0	ICMP	
0.006	Switch0	PC0	ICMP	

Bottom Screenshot: The same network topology is shown, but the Simulation Panel's ACL Filter settings are expanded, showing various protocols enabled for filtering. The Event List shows the simulation has progressed to 0.006 seconds.

The interface includes a menu bar (File, Edit, Options, View, Tools, Extensions, Help), a toolbar, a Logical view pane, a Simulation Panel, and a bottom status bar with a search bar and system icons.

