Packet Flow Visualization Using Simulation Mode

Objective: To observe ARP and ICMP packet flow, switch MAC learning, and behavior of first vs second ping.

Network Topology:

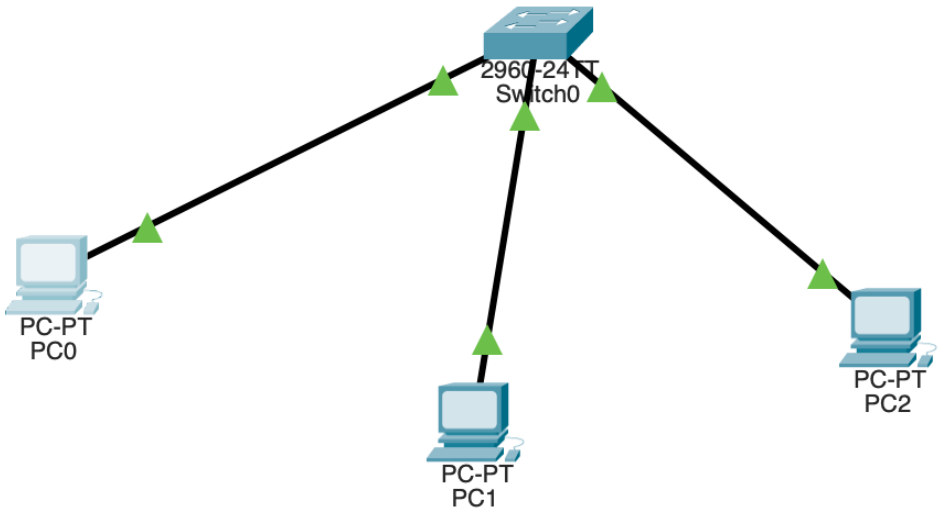

First Ping Observation:

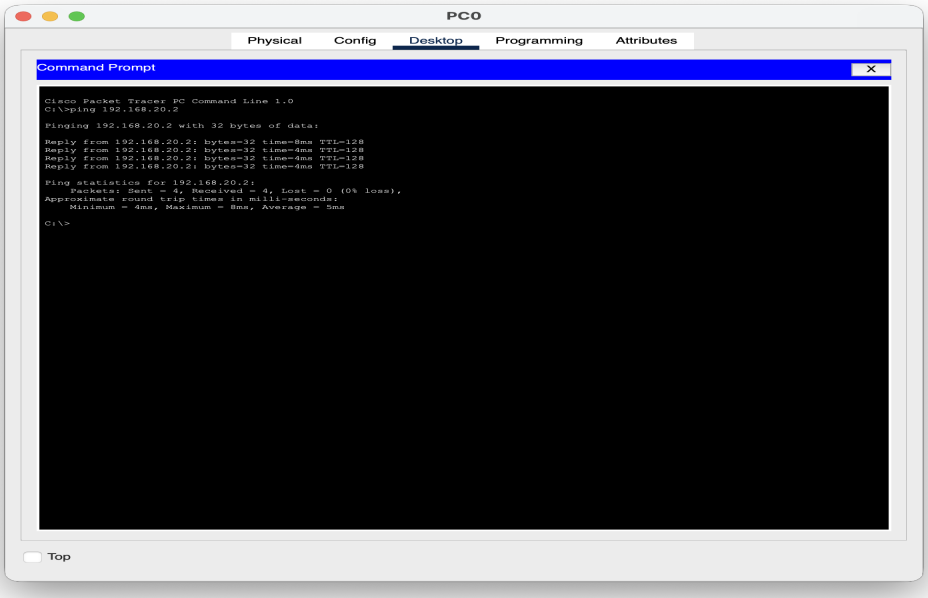

During the first ping, ARP request is broadcasted to find MAC address followed by ARP reply. Then ICMP echo request and reply are exchanged.

Second Ping Observation:

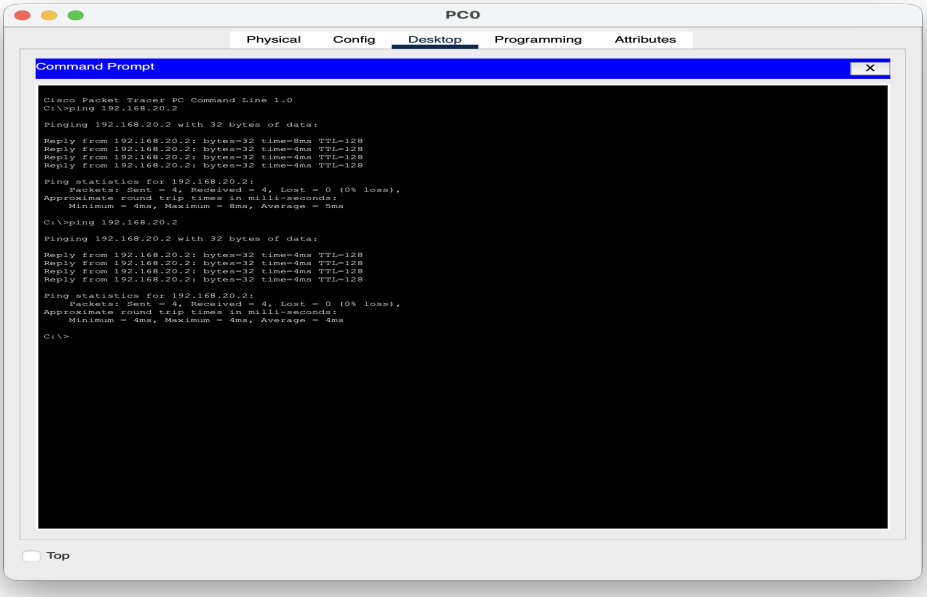

During the second ping, ARP is not required as MAC address is cached. Only ICMP packets are observed.

Switch MAC Address Table:

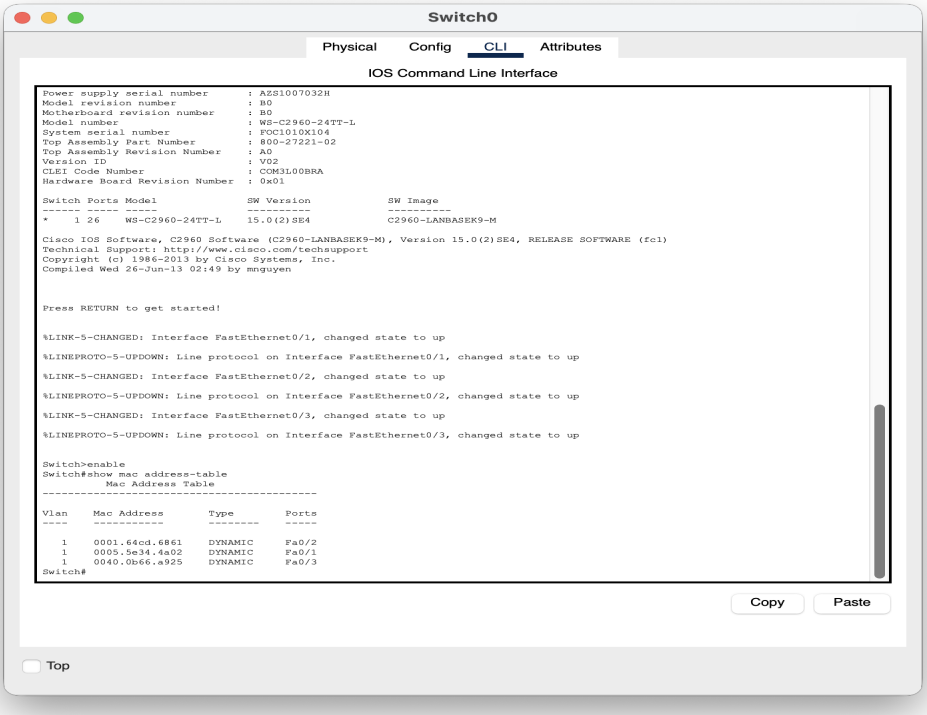

Switch learns MAC addresses dynamically by observing incoming frames and mapping them to ports.