

# FORECASTING CUSTOMER'S ENERGY DEMAND USING MACHINE LEARNING

SAIFUL ABU

Department of Computer Science

APPROVED:

---

Christopher Kiekintveld, Chair, Ph.D.

---

Luc Longpré, Ph.D.

---

Mohamed Amine Khamsi, Ph.D.

---

Pablo Arenaz, Ph.D.  
Dean of the Graduate School

©Copyright

by

Saiful Abu

2016

*to my*

*MOTHER and FATHER*

*with love*

# Chapter 1

## Smart Grid and PowerTAC Competition

In this chapter, I will describe Smart Grid and PowerTAC competition.

### 1.1 Traditional Energy Distribution and Consumption System

In traditional electricity generation system there are three subsystems [4]. In electricity generation subsystem, the generator rotates a turbine in magnetic field which generates electricity. The turbine rotates through the power of kinetic energy of water falling from a water fall or a river with strong current, or from the energy of nuclear powerplant or energy received from burning coal or oil. Traditional energy generation system then transmits the electricity through transmission grid and electricity gets distributed in the distribution grid. This generation system is one way meaning a single power generation source serves several consumption source.

### 1.2 Smart Grid

In contrast to the traditional electricity generation system, Smart Grid (SG) are two way [4]. So, any node in the distribution grid can produce electricity and push it to the distribution grid if necessary. The NIST report [4] states that the SG would make the electricity generation and supply robust against generator or distribution node failure, use renewable energy widely and efficiently, reduce green house gas emission, reduce oil consumption by encouraging usage of electric vehicles, it will give customers more freedom to choose among energy sources. Smart grids will encourage usage of electric vehicle as these vehicles have the ability to store power in a battery and transmit the power to the distribution grid if there is a necessity. The major challenge with the usage of renewable energy is it is uncertain. This uncertainty causes the ability to predict how much energy the SG can produce in a future time slot hard. Success of SG will need efficient methods to predict energy production [12].

## **1.3 Smart Grid and Renewable Energy**

One of the major focus of Smart Grid(SG) will be using renewable energy. There are challenges involved with using this abundant source of energy [14]. People are already showing strong motivation to use renewable energy as indicated by the statistics that 20% of total energy is from the renewable sources which is second after coal 24%. People are using renewable energy due to economic reward and environmental concern. Major challenge with Renewable energy is amount of the energy produced is greatly varying. Since the energy produced is volatile there must be a storage mechanism that balances out the surplus energy. The usage of rechargeable electric vehicles might serve the purpose of storage. Accurate prediction of the renewable energy might enable the electric car users to absorb surplus energy and push it back to the grid in peak hours if necessary.

## **1.4 Importance of accurate load forecasting**

. Accurate load forecasting is important to ensure efficient fuel usage, reduce wastage of energy and planning proper operation of power generators [9].

# Chapter 2

## Related Works

In this chapter I will describe what other works has so far been done to predict customer's future energy demand.

Predicting customer's energy demand is important because failure to predict the demand accurately can cause monetary and environmental loss. Customer's with shifting load can use the energy produced by the renewable energy. Those customers can shift their load to a time where there is a high probability of renewable energy production.

Acting directly on the real environment can be risky. The powerTAC simulation system gives a low risk platform where the researcher's can build and test their works before deploying to real world.

There are different types of load forecasting namely short term load forecasting and long term load forecasting. Short term load forecasting deals with forecasting the customer's demand has the range of time couple of weeks. Long term load forecasting may forecast customer's demand over month or year [3].

TACTEX'13 won the PowerTAC competition in 2013. In a week a customer have  $24 * 7 = 168$  slots. TACTEX'13 the winner of PowerTAC competition 2013 kept track of average usage of 168 weekly slot for each customer. To predict a future time slot, their agent would look at at which weekly slot the future time slot would fall in. Then the agen uses that weekly slot's average usage as the prediciton of the future slot.

The ARIMA model uses both moving average and auto regression to forecast the demand. To make a forecast about a future time slot, the auto regression model uses some previously observed time slots values based on its degree. Moving average scheme would use the average of all the known time series data points to make a prediciton about a future time slot .Problem with univariate ARIMA model is that they don't take into account other variables that my affect the demand such as temperature. [3] attempted to forecast the energy demand for a region of Taiwan. They found temperature has effect on the energy usage of customers. To make prediction about the demand they used a transfer function that relates the daily temperature with energy usage along with the ARIMA model. This scheme resulted better than the univariate ARIMA model. They manually clustered the population in four categories such as commercial, office, residendial and industrial customers.

Intuitively weather variables such as temperature seem to have some effect on how much energy people use. Researchers have found that weather effect relies on the time duration the training data has. [2] trained a SVM energy demand predictor that would predict energy demand of customers for the month January. The training data consited of every half hour's electricity demand from 1997 to 1998, average temperature from 1995 to 1998. They trained the predictor with only the portion of data that are related to the month

January. They have found that within the month of January the temperature does not vary much and excluding the temperature from the feature set actually gives better prediction. Again, if energy demand is long term which means the window of prediction is about a year, the temperature seems to have effect on the energy demand of the customers. [6] collected data of 18 months from households of a region of Australia. They collected the weather data from weather office and from self transplanted devices. They observed how the household customers use appliances based on the temperature. They came into conclusion that for that region, equilibrium point for energy is usage at temperature 0.25 degree celcius. If the temperature increases or decreases from this temperature, the electricity usage increases. They explained the behavior by stating as the temperature decreases, houses customers tend to use heaters and if the temperature rises they tend to use coolers more.

Regional load forecasting will enable us to know which regions need more energy. If we know which regions need more energy, we will know most suitable places to place electricity generator plants. [7] worked on load forecasting based on region. They diivided electricity usage of Taiwan in 4 areas. For each region, they collected GDP, population, highest temperature and aggregated load. After that, they trained Artificial Neural Network model for each region. For baseline, they trained linear regression model for each region. The result showed that, the ANN based load forecasting methods performed better than the linear regression methods.

[10] have used clustering method to forecast customer's future electricity demand. They collected data from more than 4000 household customers in Ireland for about 6 months. Collected data included electrecticity usage at 30 minutes interval, appliances used in the home and different socio-economic information about the people living in a particular house. They clustered each days usage which they call load profiles. A customer's daily usage then can be assigned to one of those load profiles. The customer is then characterized by the the mostly used load profile. The authors then train a linear regression classifier that was built upon the socio-economic information of a the customers, types of appliances used in the house and the description of the house to figure out the common load profile of the given household. The predicted load profile of the customer received from the linear regression model will be used to predict the demand of the customer for a given day.

[8] the authors proposed a methodology to model electric car user cusotmer's demand. They uses data of electric car users of Netherlands from 2000 to 2007. The data included purpose and starting time of each drive, duration of the drive and the time the driver spent at the purpose destination and when the time when the driver returned home. From this data, the authors found usually the drivers would recharge their car at around hours 17:00 to 19:00. So the electricity generators may find this time a peak demand time due to the added energy demand of the electric vehicle customers.

[9] the authors observed load of certain hour of a certain day is highly correlated with load of some certain days before that day. On the basis of the observation, they would take ten most similar looking days electricity usage and feed it to an ANN to make forecast of the day. The authors found the other variables that may affect the load such as temperature, humidity may change so swiftly that inclusion of them may reduce the accuracy of the predictor. So they excluded all the social, environmental variables from their model of prediction.

The authors in ref [13] have proposed an expert system based load forecasting method for the region Virginia. The expert system would forecast load of upcoming 24 hours. They observed the variables that are likely to affect the load. They came up with variables such as temperature, load of previous hour, season and day of week have strong correlation with the observed load. They implemented a computer program that mimicked how a human operator makes load forecast based on the independent variables. For a specific region's weather condition, their method worked well and required limited amount of historical data.

[11] the authors used various machine learning techniques to make 24 hour ahead load forecast. They found that hour of week, weather related features such as temperature cloud cover were influential to the electricity load. They created one machine learning forecasting module for each customer by extracting relevant features of the customers. The forecasting modules performed well for the customers that shows regularity in their energy consumption behavior. For the customers with load shifting capabilities to their favored hour, the scheme did not perform well.

In the survey article [5], the authors reported variables that are likely to affect the electricity load. According to them, univariate models are adequate if the load forecast is up to 6 hours ahead. If the target is to make load forecast with larger window, including more available variables such as weather related information and day of week's information can be helpful. There are three types of cycle in the load curve, daily, weekly and seasonal. At a certain time of a day load is usually higher or lower. Again, in a week, there are two visible patterns in weekend and weekdays. The days that are neighbor to the weekend such as Friday and Monday are also influenced by the weekend days. The season and area under consideration also have strong correlation with the electricity load.

In their paper [15], the authors proposed a novel demand prediction mechanism. In power24 competition, every broker is provided with past two weeks usage of all the customers or bootstrap usage. Their proposed broker clustered the customers based on the bootstrap data. For each cluster, the broker would make a linear regression model. The input variables included past average usage and weather related information. This approach of prediction clusters based on the usage pattern of the customers. So this method may not be suitable for customers with irregular usage pattern such as customers with load shifting capabilities and electric vehicle customers.

Our proposed approach works very similarly as [15] for customers with regular pattern. Instead of creating the cluster and prediction modules runtime, our broker creates those offline. Our broker uses wealth of data to cluster, since there is no time constraint, it can check different clustering methods and use the one that gives the best result. Also, our broker creates prediction modules using various machine learning algorithms such as decision tree, neural networks, linear regressions etc and selects the one that best performs for a given cluster.

The authors [1] have used Kalman Filter to forecast short term load demand. Kalman Filters are used widely to approximate current state of a dynamic system. To do this, it computes the next state of the system using some algorithm. Also, it observes what the measurements say about the current state of the system. Both of the prediction mechanisms have high uncertainty. When they are combined together, the uncertainty gets reduced.



The authors represented the current state of the prediction system with previous usage and weather related information. For each hour of a day, there are some constant coefficients. This application assumes that current day's load pattern will be similar to that of previous day.

# Chapter 3

## Customer Description

In this chapter I will describe the customers present in the PowerTAC simulation system, some statistics about them and their attributes.

### 3.1 Customers

In PowerTAC simulation system the customers are the entities that buys and sells energy. A customer subscribes to one of the tariffs of the brokers and it pays or sells energy according the tariff plan. A customer can represent a population size of one to several thousands. For example, customers that represent a Electric Vehicle represent only one person and the customers that represent a village usually have several thousand population. In PowerTAC environment there are 168 customers.

### 3.2 PowerTypes

A customer can have among powertype among some possibility. Powertype determines the behaviour of the customers. A customer that has powertype related to production produces energy. A customer that has a power type related to energy consumption usually consumes energy. In the following subsections I describe powertypes of the customer.

#### 3.2.1 consumption

A customer with powertype consumption are the most common customers. They use the energy when they need it. They cannot shift their demand to a future timeslot. Usually they have a regular pattern in their energy usage. Usually they show similar pattern for weekdays. They have similar kind of usage pattern for the weekends.

The figure 3.1 shows 2 days electricity usage of the BrookSideHomes customer. The pattern shows in a day, around at 10 am there is a growing need for electricity. During night after 10 pm the electricity consumption starts decreasing.

The figure 3.3 shows two weeks consumption of the downtown customer. The customer shows similar pattern for all weekdays. It also distinguishable energy usage during the weekends.

#### 3.2.2 Interruptible Consumption

Interruptible customers are smart enough to shift their energy demand in a timeslot where they can buy electricity in a reduced price. Because of this shifting capability, they don't



Figure 3.1: Two days energy usage for the customer Brooksidehomes.

show the regular usage pattern as the consumption customers do. Figure 3.3 shows a controllable customer's 2 days usage.

### 3.2.3 Thermal Storage

Thermal storage customers shows weekly pattern in their energy usage. Their energy usage in a day depends very much on the energy they used in the last timeslot. Figure 3.4 and 3.5 shows a day and two week's energy usage of the thermal storage customer sf2.

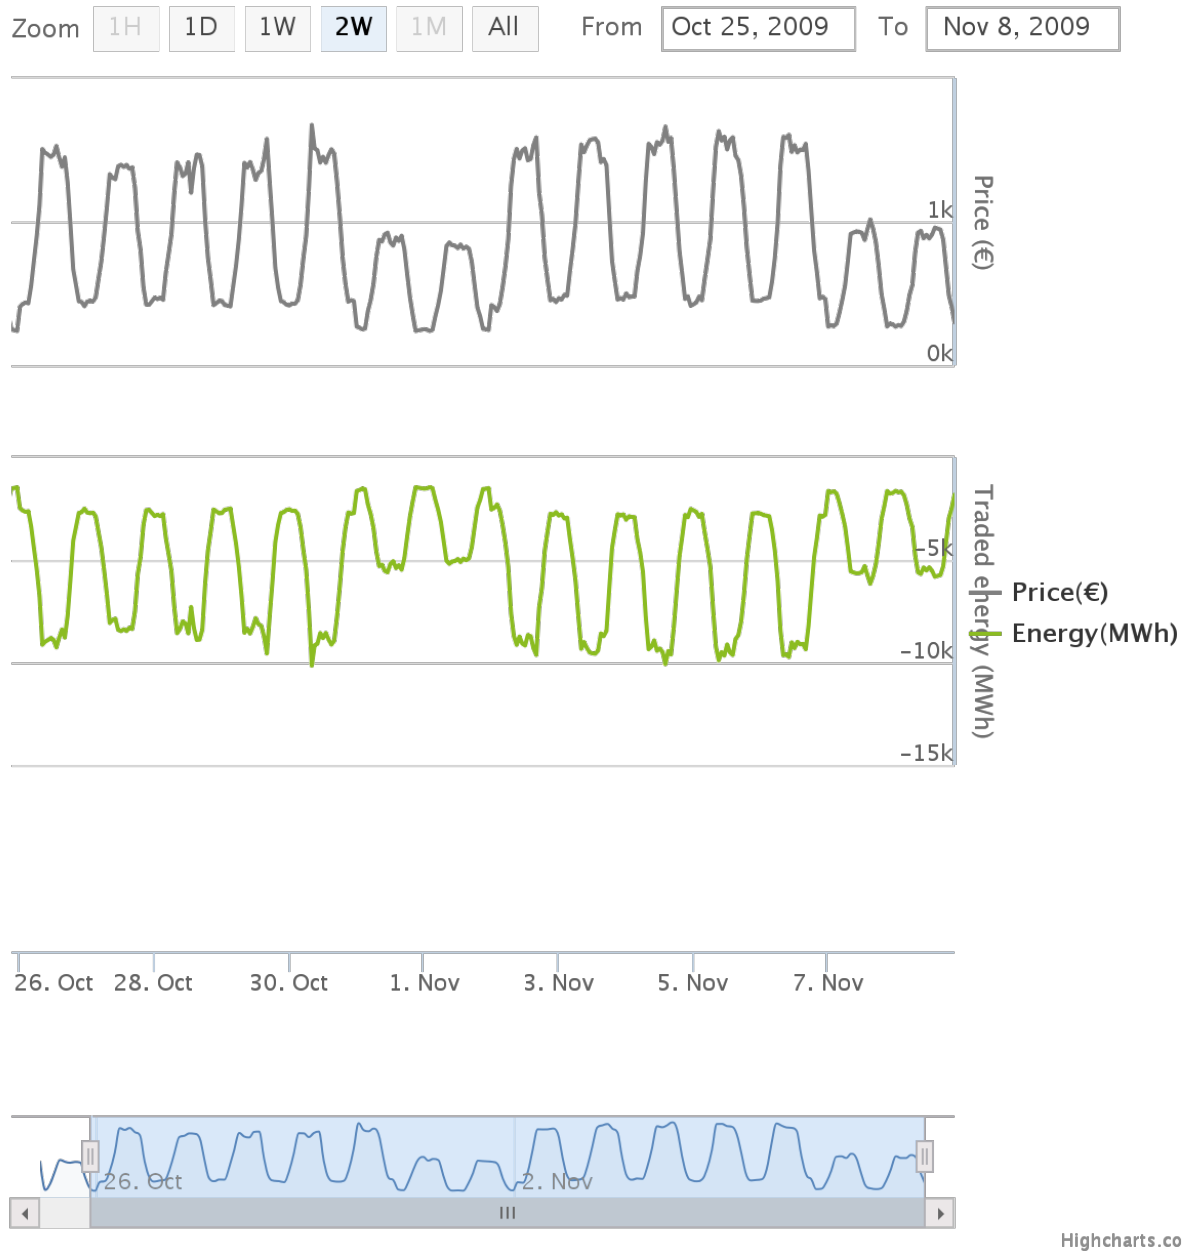


Figure 3.2: Two weeks energys usage of the downtown office customer.

sf2-thermal-week

### 3.2.4 Solar Production

Figure 3.6 shows two day's and figure ?? shows a week's energy produciton of the Solar Production customer of the customer SunnyHill solar production customer.

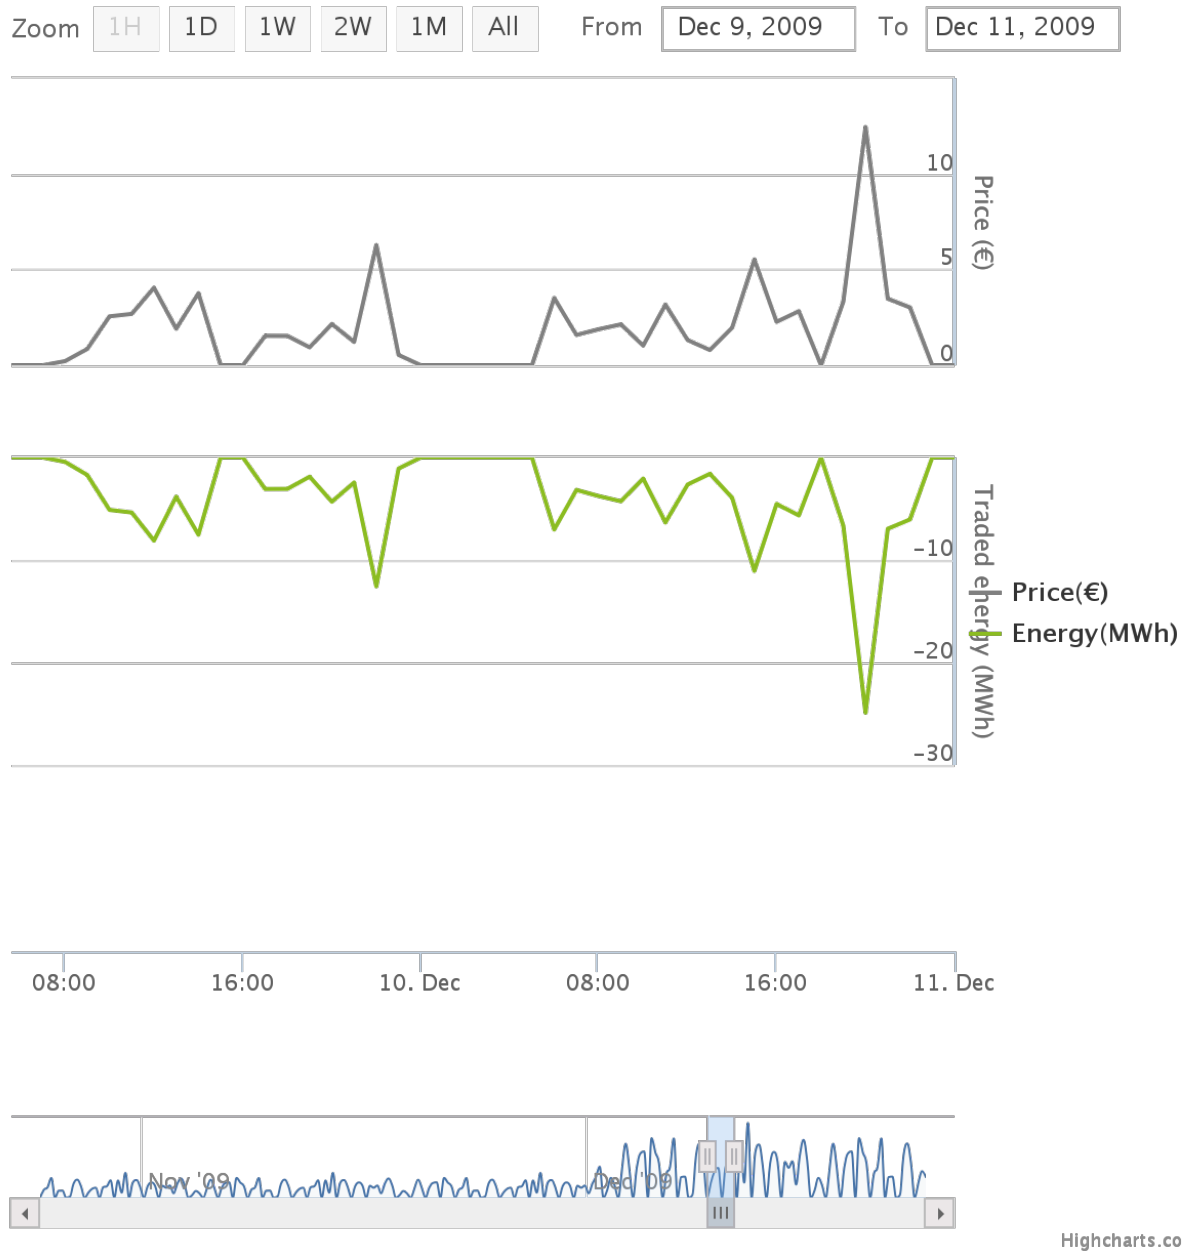


Figure 3.3: Two days energys usage of the village 2 ns controllable customer.

### 3.2.5 Wind Production

### 3.2.6 Electric Vehicle

## 3.3 Statistics

In this section I present some statistics on the customers available in the system.

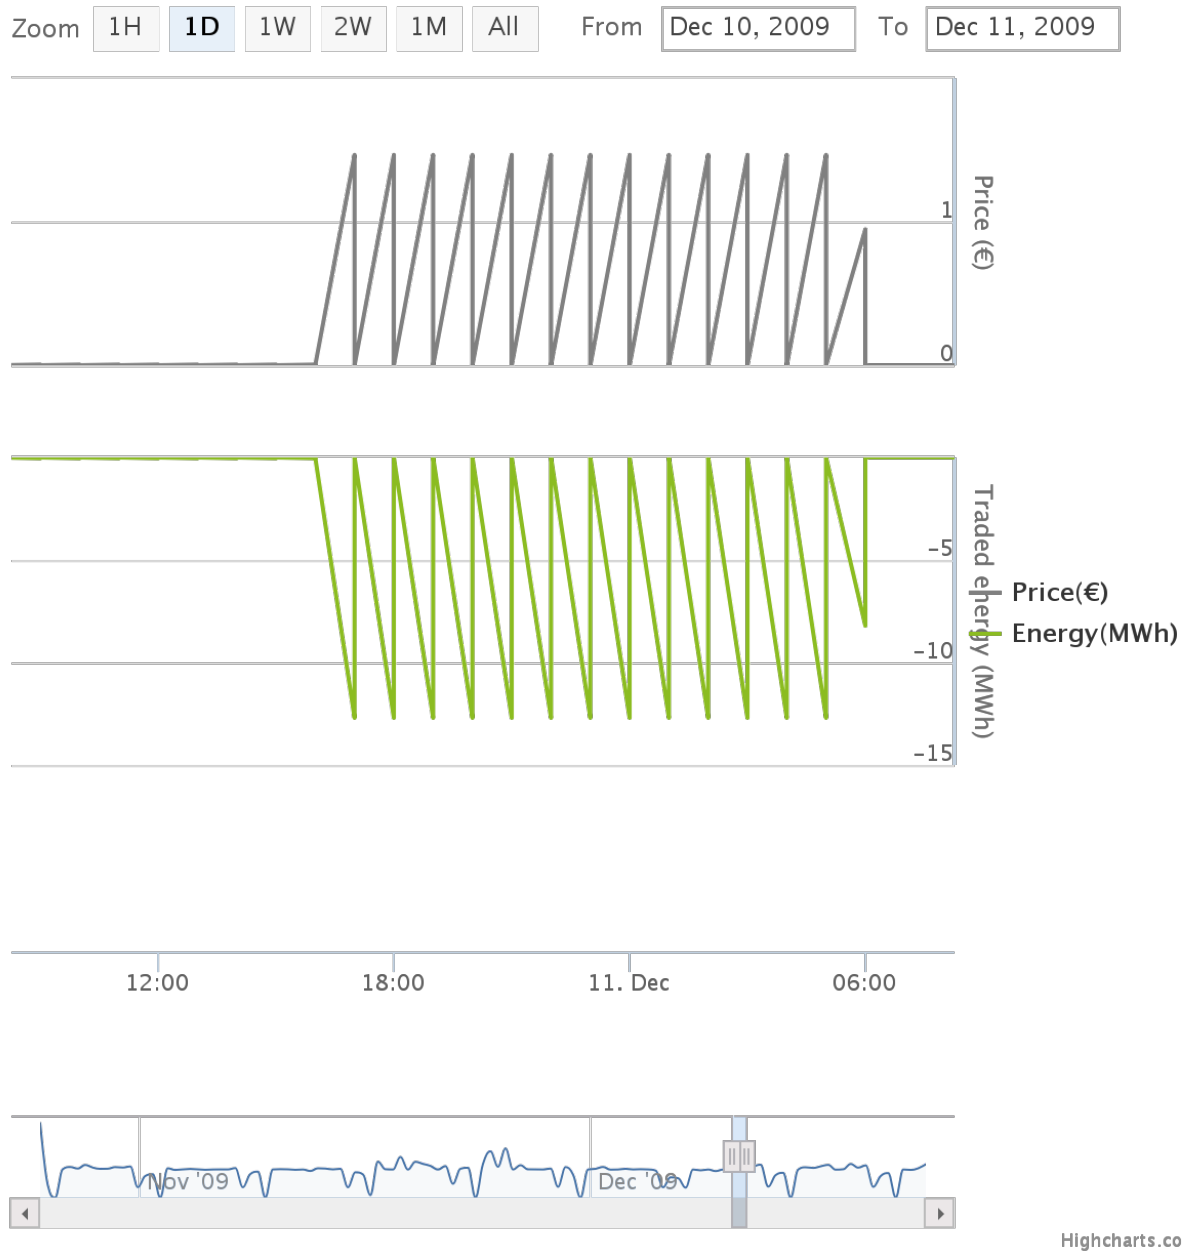


Figure 3.4: A day's energys usage of the sf2 thermal storage customer.

### 3.3.1 Customer Vs PowerType

In the figure 3.8 we can see the system has more customer with the power type electric vehicle than any other powertypes. This is because, the electric vehicle represents a population of size 1.



Figure 3.5: Two week's energys usage of the sf2 thermal storage customer.

### 3.3.2 Population Vs PowerType

From figure 3.9 by far the powertype of consumption has the most number of people in them.

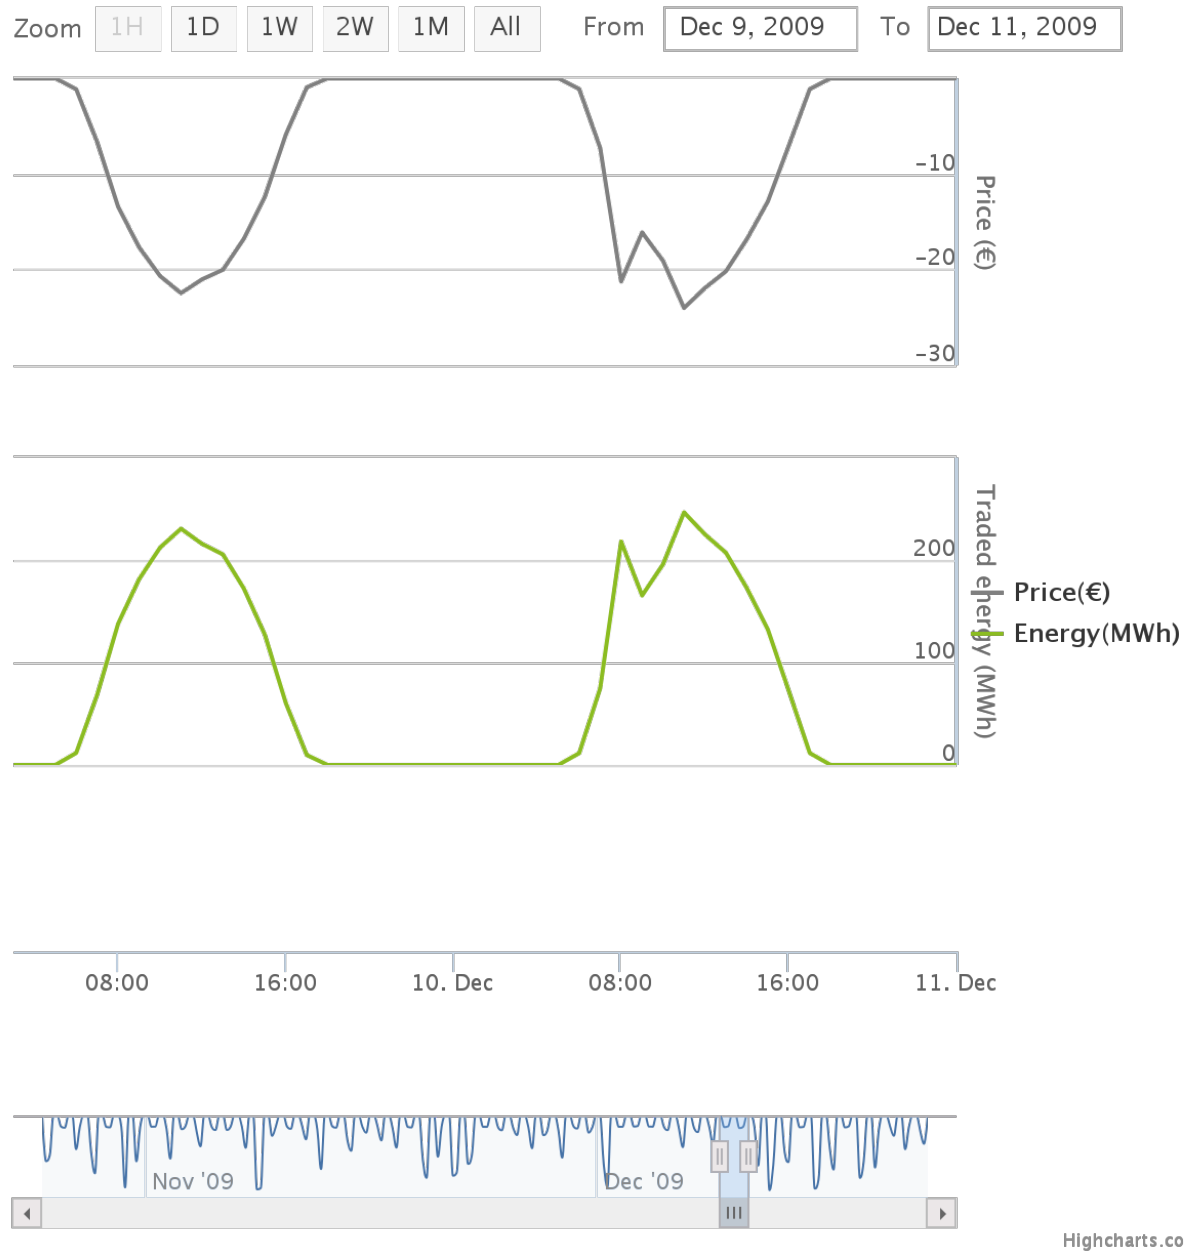


Figure 3.6: One week's energys usage of the SunnyHill solar production.

### 3.3.3 Total Energy Consumed Vs PowerType

From figure 3.10 we can see that the consumption type customers uses the most amount of the electricity. From figure 3.10





Figure 3.7: One week's energys usage of the SunnyHill solar production.

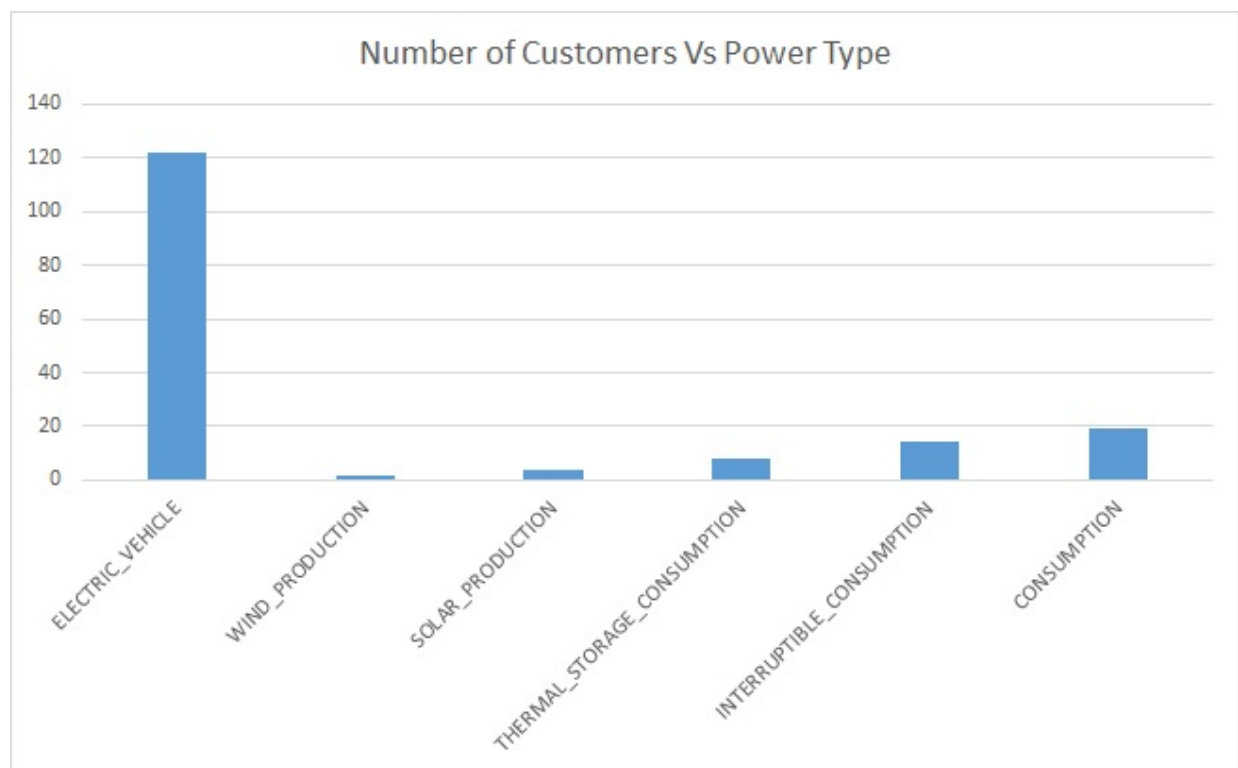


Figure 3.8: Number of customers vs Powertype.

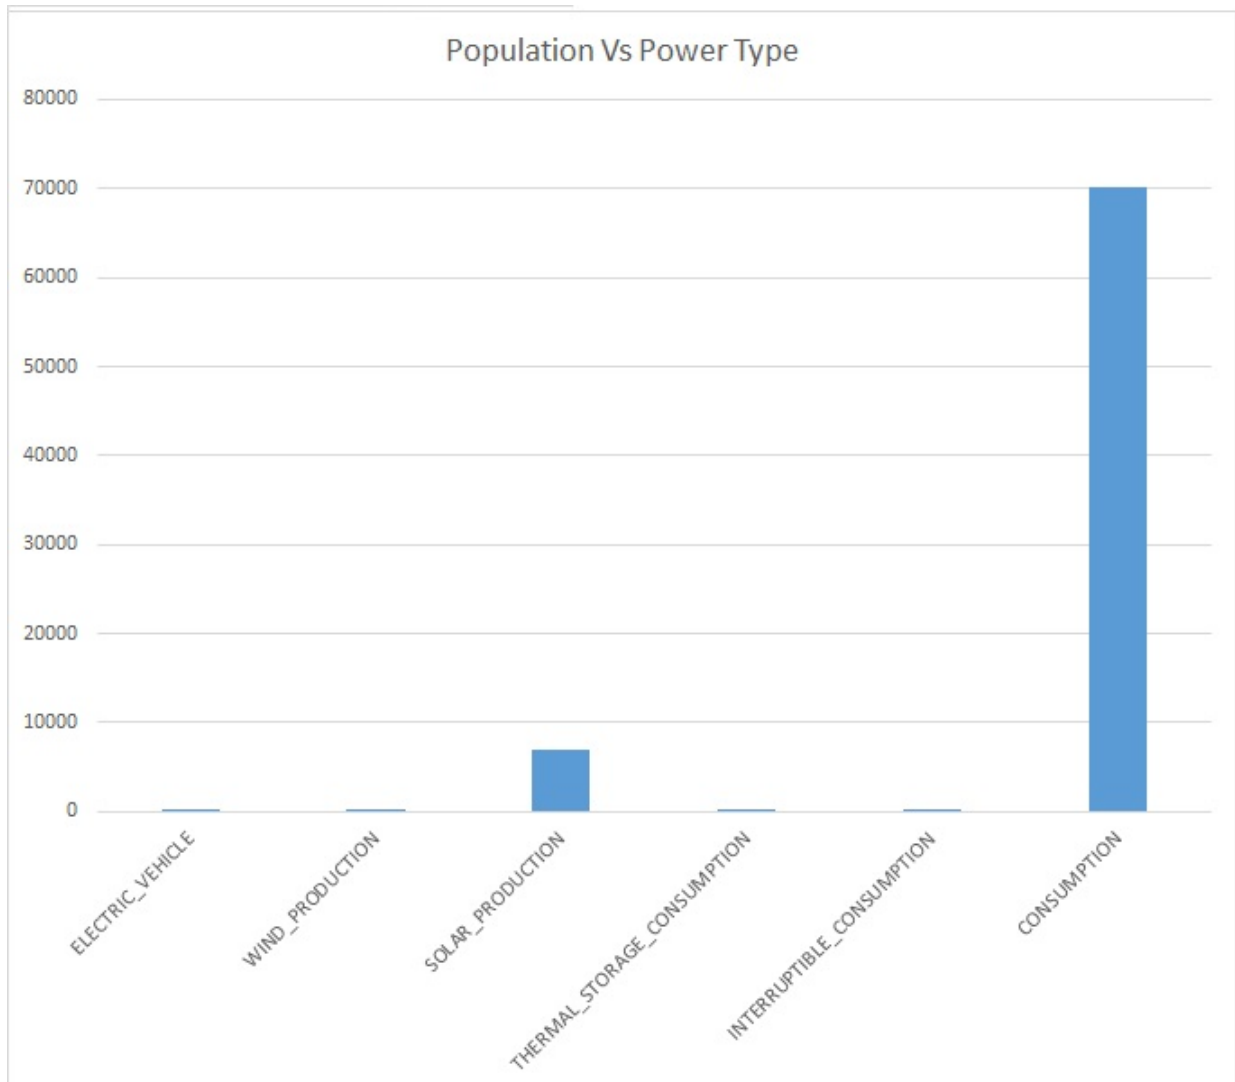


Figure 3.9: Population vs Powertype

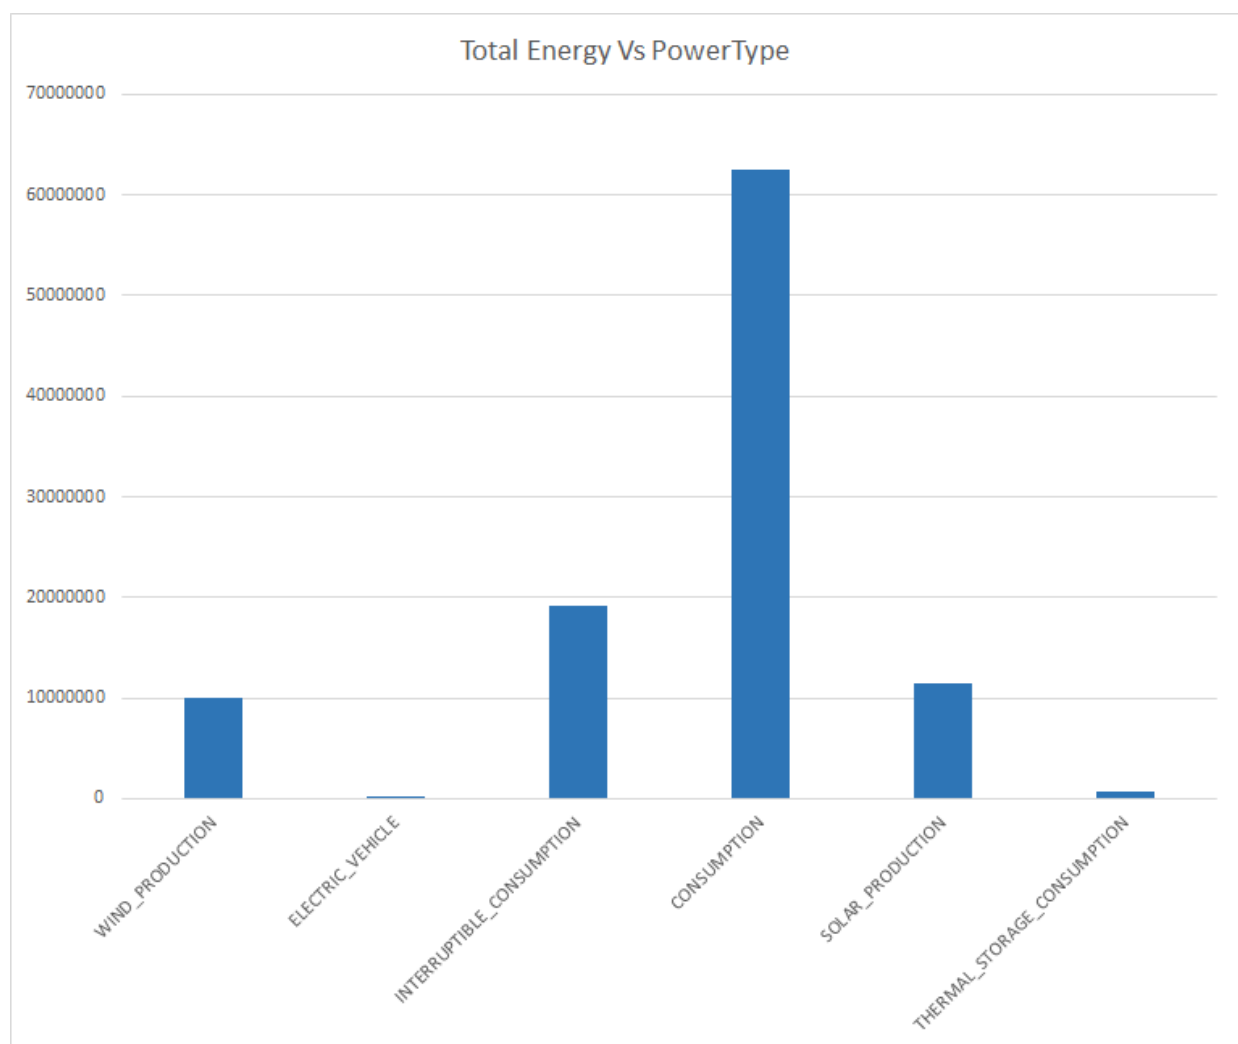


Figure 3.10: Energy vs PowerType.

# References

- [1] HM Al-Hamadi and SA Soliman. Short-term electric load forecasting based on kalman filtering algorithm with moving window weather and load model. *Electric power systems research*, 68(1):47–59, 2004.
- [2] Bo-Juen Chen, Ming-Wei Chang, and Chih-Jen Lin. Load forecasting using support vector machines: A study on eunite competition 2001. *Power Systems, IEEE Transactions on*, 19(4):1821–1830, 2004.
- [3] MY Cho, JC Hwang, and CS Chen. Customer short term load forecasting by using arima transfer function model. In *Energy Management and Power Delivery, 1995. Proceedings of EMPD'95., 1995 International Conference on*, volume 1, pages 317–322. IEEE, 1995.
- [4] Xi Fang, Satyajayant Misra, Guoliang Xue, and Dejun Yang. Smart gridthe new and improved power grid: A survey. *Communications Surveys & Tutorials, IEEE*, 14(4):944–980, 2012.
- [5] Heiko Hahn, Silja Meyer-Nieberg, and Stefan Pickl. Electric load forecasting methods: Tools for decision making. *European Journal of Operational Research*, 199(3):902–907, 2009.
- [6] Melissa Hart and Richard de Dear. Weather sensitivity in household appliance energy end-use. *Energy and Buildings*, 36(2):161–174, 2004.
- [7] Che-Chiang Hsu and Chia-Yon Chen. Regional load forecasting in taiwan—applications of artificial neural networks. *Energy conversion and Management*, 44(12):1941–1949, 2003.
- [8] Ioannis Lampropoulos, Greet Vanalme, and Wil L Kling. A methodology for modeling the behavior of electricity prosumers within the smart grid. In *Innovative Smart Grid Technologies Conference Europe (ISGT Europe), 2010 IEEE PES*, pages 1–8. IEEE, 2010.
- [9] Fang Liu, Qiang Song, and Raymond D Findlay. Accurate 24-hour-ahead load forecasting using similar hourly loads. In *Computational Intelligence for Modelling, Control and Automation, 2006 and International Conference on Intelligent Agents, Web Technologies and Internet Commerce, International Conference on*, pages 249–249. IEEE, 2006.
- [10] Fintan McLoughlin, Aidan Duffy, and Michael Conlon. A clustering approach to domestic electricity load profile characterisation using smart metering data. *Applied energy*, 141:190–199, 2015.

- [11] Jaime Parra Jr and Christopher Kiekintveld. Initial exploration of machine learning to predict customer demand in an energy market simulation. In *Workshops at the Twenty-Seventh AAAI Conference on Artificial Intelligence*, 2013.
- [12] Cameron W Potter, Allison Archambault, and Kenneth Westrick. Building a smarter smart grid through better renewable energy information. In *Power Systems Conference and Exposition, 2009. PSCE'09. IEEE/PES*, pages 1–5. IEEE, 2009.
- [13] Saifur Rahman and Rahul Bhatnagar. An expert system based algorithm for short term load forecast. *Power Systems, IEEE Transactions on*, 3(2):392–399, 1988.
- [14] Andre Richter, Erwin van der Laan, Wolfgang Ketter, and Konstantina Valogianni. Transitioning from the traditional to the smart grid: Lessons learned from closed-loop supply chains. In *Smart Grid Technology, Economics and Policies (SG-TEP), 2012 International Conference on*, pages 1–7. IEEE, 2012.
- [15] Xishun Wang, Minjie Zhang, Fenghui Ren, and Takayuki Ito. Gongbroker: A broker model for power trading in smart grid markets. In *2015 IEEE/WIC/ACM International Conference on Web Intelligence and Intelligent Agent Technology (WI-IAT)*, volume 2, pages 21–24. IEEE, 2015.