MERTI

PASSENGER ELEVATOR

MERTI ELEVATOR (WUXI)CO.,LTD.

Add/NO.22 Hongxiang Road, Hudai industrial Park,Binhu District,Wuxi,China

Http://www.mertielevator.com/

E-mail:sales01@mertielevator.com

Catalog content is for reference only, actual configuration is as per contract and goods in kind prevail.

MERTI ELEVATOR

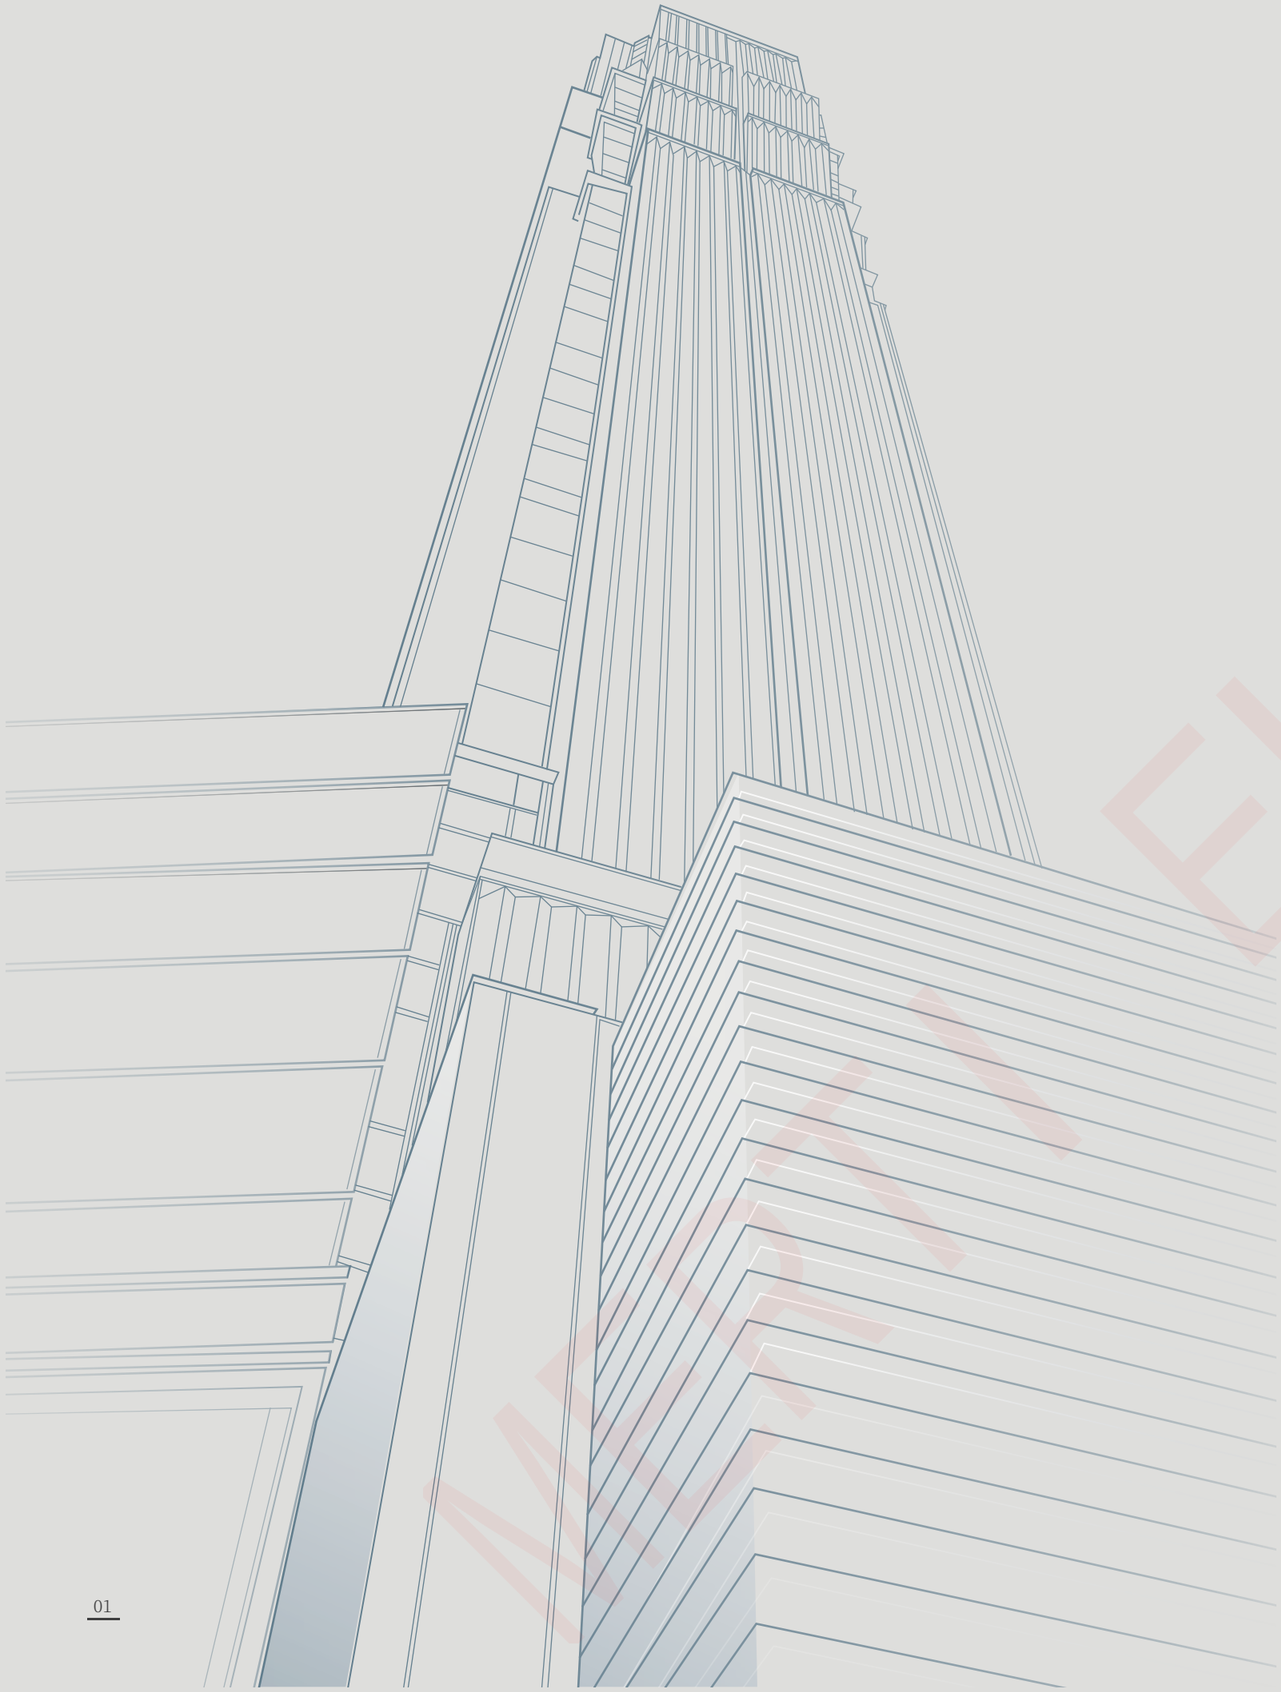

ABOUT MERTI ELEVATOR

MERTI Elevator Co., Ltd. is a comprehensive elevator manufacturing enterprise, integrating research and development, manufacture, sales, installation and service. MERTI adopts more than 15 years of elevator professional accumulation, has the abundant strength of research and development and complete products system with our independent innovation. Based on this, our team continously exploring domestic and overseas markets, actively establish and develop the global marketing and service network. MERTI committed to providing more professional products and services for our customers on the earth.

MERTI ELEVATOR

ELEVATOR CONFIGURATION

The types of Merti Elevator technology products fully cover the demands of users, Creating infinite possibility for building traffic

Passenger elevator with machine room Sino-P series

MERTI Sino-P series passenger elevators are favored by the market for their safety, comfort, energy saving and environmental protection features, which offer a wonderful experience for modern urban life.

Main configuration

Capacity	630kg~1600kg
speed	1.0m/s~2.5m/s
Traction machine	TORIN/MONA
Door operator	OULING
Controller	MONARCH
Door protection	Light curtains

Passenger elevator machine room-less Sino-MRL series

Compared with traditional elevators, MERTI Sino-MRL mrl machine room-less elevator saves the space occupied by the machine room, saving the space for customers and creating value.

Main configuration

Capacity	630kg~1600kg
speed	1.0m/s~1.75m/s
Traction machine	TORIN/MONA
Door operator	OULING
Controller	MONARCH
Door protection	Light curtains

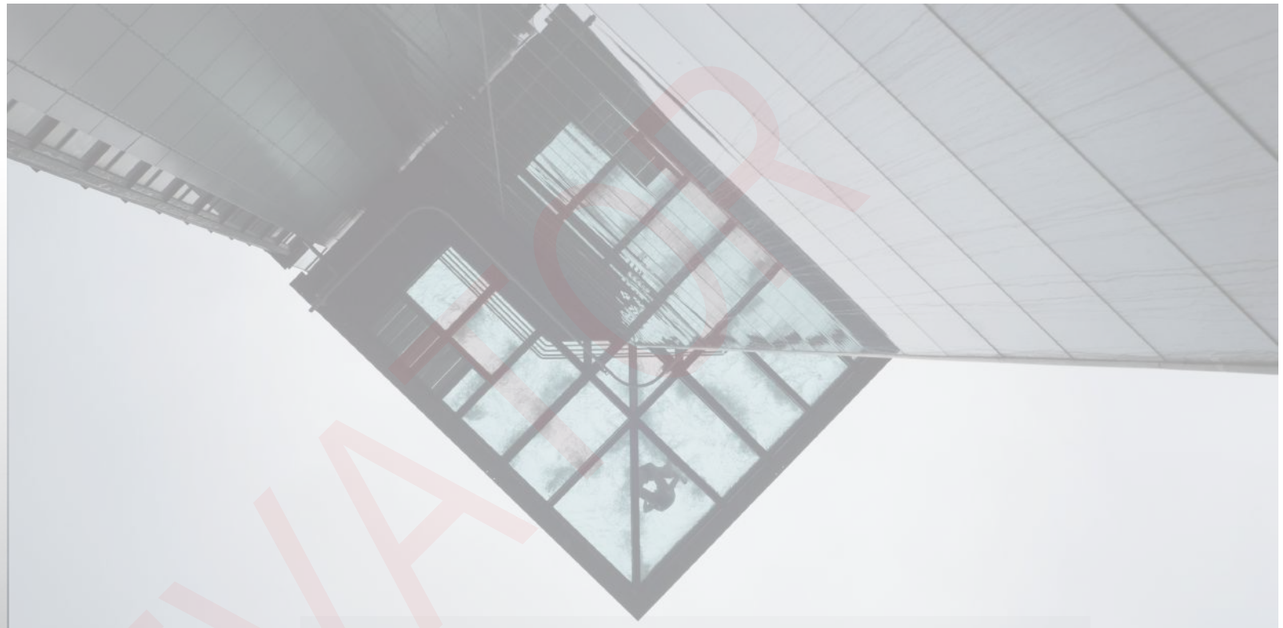

Panoramic elevator Sino-G

MERTI Sino-G is a combination of artificial intelligence. In the space flowing up and down, you can appreciate the beautiful scenery of the building and enjoy the comfort brought by modern equipment.

Main configuration

Capacity	630kg~1600kg
speed	1.0m/s~1.75m/s
Traction machine	TORIN/MONA
Door operator	OULING
Controller	MONARCH
Door protection	Light curtains

Traction machine

Note: the pictures are for reference only, and follow the elevator configuration



XIZI is a hi-tech enterprise with independent R&D ability and we have our own factory and brand

ENERGY SAVING AND ENVIRONMENTAL PROTECTION

Feel the efficient and stable operation of the elevator with a green vision, and enjoy a spiritual journey of space.

Energy saving traction machine

Environmental protection

The permanent magnetic synchronous gearless traction machine adopts a permanently sealed bearing with low noise, no need to replace grease, and no oil pollution. And no maintenance is required, saving maintenance costs for users.

Stable, reliable

The permanent magnetic synchronous motor adopts high temperature resistant rare earth materials, and is equipped with a motor overheating protection device to ensure that the motor will not demagnetize; the double stack brake is sensitive and has a large braking force to ensure the safety of passengers.

Space-saving

The permanent magnetic synchronous gearless traction machine is small in size and compact in structure, significantly improve the shaft utilization, thereby effectively saving building space.

Energy efficient

Compared with the geared mainframe, the reduction box is eliminated, the mechanical energy consumption, noise and vibration caused by this are eliminated, and the transmission efficiency is greatly improved. Compared with the traditional geared mainframe, the average energy saving can reach 30%.

Lighting system

Using LED light source, energy saving and environmental protection.

It adopts voltage and current overload protection technology, which is safer and more energy-saving. Compared with incandescent lamps, it can save energy by more than 80%.

Intelligent standby automatic sleep,energy saving.

Energy regeneration system (optional)

Through the energy regeneration system, the energy generated when the elevator is fully loaded down or lightly loaded is converted into electrical energy and fed back to the grid for use by the equipment under the grid

MERTI ELEVATOR

SAFETY & EASE

Every meeting is to escort you, and build trust every time with the most reassuring service.

▶ Security guard

Light curtain door protection

Light curtains with standard 154 beams, which greatly improves the sensitivity of foreign objet detection and enhances the safety of taking the elevator. The protection level of the light curtain is IP65.



Car door lock

In the event of a non-level stop caused by a fault or power failure or other unexpected circumstances, passengers are prevented opening the door from inside the car to eliminate related all safety hazards.

Reset rescue function

When the elevator position is lost, it will automatically enter the reset rescue mode and run to the nearest floor, open the door to release the passengers, and then run to the base station to reset.

Voltage adaptive speed limit control

When the three-phase power supply has undervoltage, overvoltage, overcurrent, etc., the elevator speed will automatically drop to 60% of the rated speed, and run at a safe speed to the nearest floor to stop, ensuring that passengers can take the elevator safely.

Voice clam

Auto playing a voice when elevator emergency stop by fault, let the passenger calm down and waiting for rescue. Extra voice reminding during the running, guide the passenger safety loading.

SCIENTIFIC TECHNOLOGICAL

Travel with technology, awaken the sense of space, and deliver the lean of the brand with the ladder of wisdom.

SMS alarm (optional)

When the elevator fails, the SMS alarm device actively sends a short message to the maintenance personnel to give an alarm, obtain the failure information in time, and improve the rescue efficiency.

Virtual voice assistant(optional)

The user realizes functions such as floor registration and door opening and closing through voice. The wake-up rate and recognition accuracy rate in noisy environments is over 95%, and in quiet environments it is over 99%.

Intelligent face recognition call system (optional)

When the passenger is within a certain sensing range, the recognition system will automatically call the camera to quickly collect facial information; through single and binocular live detection to avoid fraud information, the elevator door can be opened after successful comparison.

QR code smart call (optional)

With the help of the QR code intelligent connection control system, it is convenient for administrators and users to realize elevator unlocking, permission control, elevator calling, APP to register floors and other functions.

Floating button (optional)

The floating button device can project the interface in the air and directly image, and does not rely on other physical display. The user can directly operate the elevator buttons in the air. There is no physical contact during the interaction process, which effectively avoids cross-infection; the interactive response is sensitive and the imaging is with a sense of technology, stable, safe and reliable during use.

*For more intelligent functions, please consult the sales.

MERTI ELEVATOR

PASSENGER ELEVATOR DECORATION

MT-01
(STANDARD)

M-CL01

Ceiling: Hairline stainless steel+Acrylic
+Downlight（integrated ceiling）
（M-CL01）
Rear wall: Hairline stainless steel
Side wall: Hairline stainless steel
Flooring: PVC(M-FL012)

M-FL012

Option

MT-02

Ceiling: integrated ceiling-painted stainless steel frame + hairline stainless steel veneer + pearl white veneer + even light bar + white downlight (integrated ceiling)U-CL121
Rear wall: hairline stainless steel + mirror stainless steel
Side wall: hairline stainless steel
Flooring: block PVC

MT-03

Ceiling: Hairline stainless steel+LED downlight (ceiling integrated with car top) (U-CL088)
Rear wall: Decoration film steel plate + Mirror stainless steel
Side wall: Hairline stainless steel + Mirror stainless steel
Flooring: PVC(U-FL012)

MT-04

Ceiling: Pearlescent silver spray powder frame + Acrylic (U-CL095)
Rear wall: Hairline stainless steel
Side wall: Hairline stainless steel
Flooring: Spliced PVC(U-FL071)

MT-05

Ceiling: Painting steel (pearl silver) + Acrylic +Downlight (ceiling integrated with car top) (U-CL054)
Rear wall: Hairline stainless steel+ Mirror stainless steel etching (HM-96 Horizontal stripes)
Side wall: Hairline stainless steel + Mirror stainless steel
Handrail: Round stainless steel (U-HR001)
Flooring: PVC (U-FL037)



MT-06

Ceiling: Hairline stainless steel + Acrylic +LED down light (U-CL064)
Rear wall: Hairline stainless steel+ Hairline stainless steel strip + Mirror stainless steel
Side wall: Hairline stainless steel+ Hairline stainless steel strip + Mirror stainless steel
Skirting: Hairline stainless steel
Flooring: PVC (U-FL046)

MT-07

Ceiling: Hairline stainless steel + Acrylic (U-CL080)
Rear wall: Hairline stainless steel+ Hairline stainless steel moulding + Mirror stainless steel
Side wall: Hairline stainless steel+ Hairline stainless steel moulding + Mirror stainless steel
Handrail: Round mirror stainless steel
Flooring: PVC (U-FL031)

Ceiling

M-CL01(STANDARD)

Ceiling material:
Hairline stainless steel+ Acrylic+LED light

M-CL02

Ceiling material:
Painting steel(Aurora Silver) + Acrylic

M-CL03

Ceiling material:
Hairline stainless steel+ Acrylic+LED light

M-CL04

Ceiling material:
Hairline stainless steel+ Acrylic+LED light

M-CL05

Ceiling material:
Hairline stainless steel+ Acrylic+LED light source

M-CL06

Ceiling material:
Hairline stainless steel+ painting steel(black) +acrylic + Canister light

Flooring

PVC

M-FL01
(standard)

M-FL02

M-FL03

M-FL04

M-FL05

M-FL06

Marble

M-FL07

M-FL08

M-FL09

▶ MAN-MACHINE INTERFACE

Break through time and space limits
Encounter with technology
Encounter with art
In the square inch
Connect you to the world

COP & Display

Standard Integrated COP

M-CY 100

Panel material:
Hairline stainless steel

Option Separated COP

M-CF 1200

Panel material:
Hairline stainless steel

The renderings are for reference only, and the actual product shall prevail

➤ Display

◉ Standard

6.4"LED

◉ Option

7 "TFT

10.4\12.1"TFT

➤ Button

◉ Standard

iBS34M(BL)

Type: hairline stainless steel/mirror stainless steel/titanium stainless steel braille button

◉ Option

iBR34M(BL)

Type: hairline stainless steel/mirror stainless steel/titanium stainless steel braille button

BR34C

Type: hairline stainless steel/mirror stainless steel/titanium stainless steel button

MERTI ELEVATOR

HOP

Standard

M-LOP01

Panel material: Hairline stainless steel
Display type: 4.3″ LED display

M-LOP02

Panel material: Hairline stainless steel
Display type: 4.3″ LED display

Option

M-LOP03

Panel material: Glass+Hairline stainless steel
Display type: 4.3″ LED display

M-LOP04

M-LOP05

Handrail

M-HR001

Round stainless steel

M-HR003

Round mirror stainless steel

M-HR004

Flat stainless steel

Arrival Light

M-LY100-A

Panel material: hairline stainless steel
Titanium mirror stainless steel (optional)
White mirror stainless steel(optional)
Arrival light: Acrylic
Color: up-green, down-red

M-LY100-B

Panel material: hairline stainless steel
Titanium mirror stainless steel (optional)
White mirror stainless steel(optional)
Arrival light: Acrylic
Color: up-green, down-red

MERTI ELEVATOR

PANORAMIC ELEVATOR DECORATION

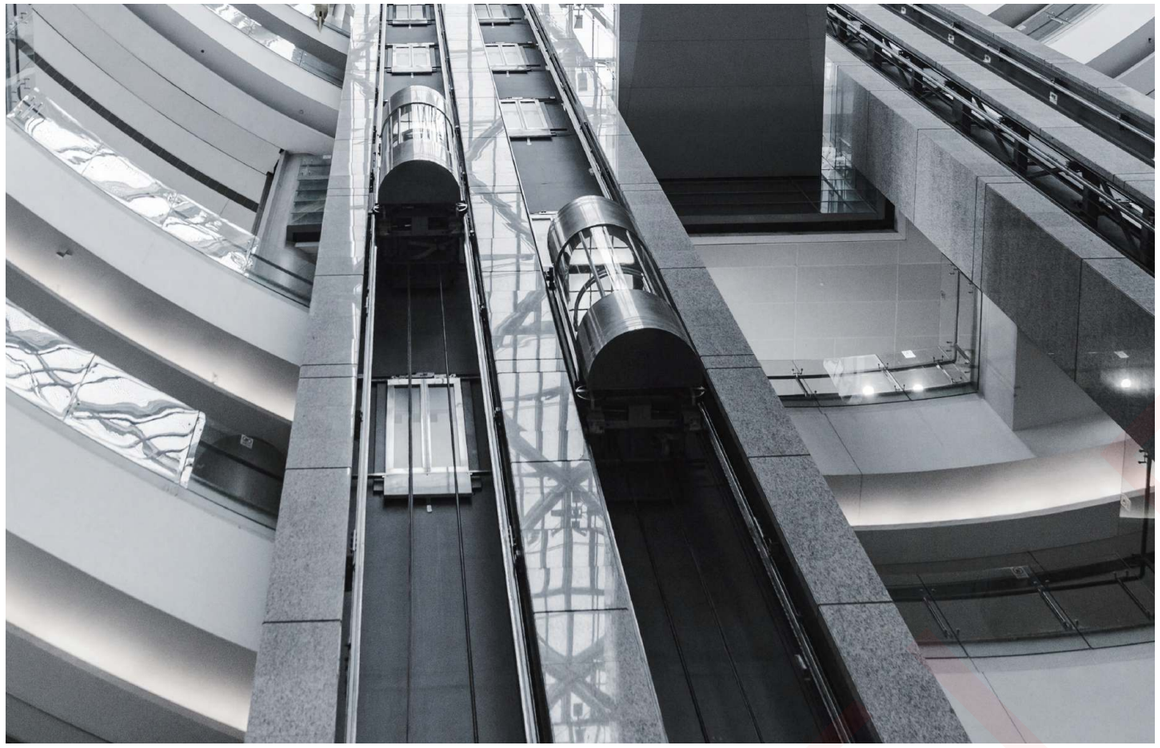

Option

M-CR901

Top and bottom cover: simple top and bottom cover
Ceiling: hairline st.steel+downlight
Front wall: hairline st.steel
Car panel: hairline st.steel+ glass
Handrail: mirror st. steel round handrail
Flooring: PVC（M-FL01）

M-CR02

Cover: hairline st. steel +acrylic
Ceiling: baked steel(aurora silver)+acrylic+LED downlight
Front wall: hairline stainless steel
Car panel: hairline stainless steel+ glass
Handrail: mirror st. steel round handrail
Flooring: PVC（M-FL01）

M-CR03

Cover: baked steel（Crimson）+acrylic
Ceiling: baked steel(Aurora Silver) +acrylic
Front wall: hairline stainless steel
Car panel: hairline stainless steel+ glass
Handrail: mirror st. steel round handrail
Flooring: PVC（M-FL01）

MERT ELEVATOR

Option

M-CR04

Cover: hairline stainless steel
Ceiling: painting steel(aurora silver)+acrylic
Front wall: hairline stainless steel
Car panel: hairline stainless steel+laminated glass
Handrail:round stainless steel
Flooring: PVC（M-FL01）

M-CR05

Ceiling: hairline stainless steel +acrylic
Front wall: hairline stainless steel
Car panel: hairline stainless steel+laminated glass
Handrail: round mirror stainless steel
Flooring: PVC（M-FL01）

M-CR06

Cover: hairline stainless steel rose gold plated + mirror stainless steel rose gold plated strip + crystal acrylic light bar
Ceiling: Hairline stainless steel rose gold plated + mirror stainless steel rose gold plated + acrylic
Front wall: hairline stainless steel rose gold plated + laminated glass
Car panel: hairline stainless steel rose gold plated + mirror stainless steel rose gold plated + laminated glass
Handrail: hairline stainless steel rose gold plated flat handrail + mirror stainless steel rose gold plated floor stand
Flooring: marble

M-CR07

Cover: mirror etched stainless steel
Ceiling: mirror stainless steel frame + acrylic + LED downlight
Front wall: mirror stainless steel
Car panel: mirror stainless steel + laminated glass (outsourcing mirror stainless steel)
Handrail: mirror stainless steel round tube floor handrail
Flooring: PVC (M-FL02)

MERTI ELEVATOR

FUNCTION LIST

●Standard
○Option

▶ Safty For Passenger

Function	Description	Remarks
Light Curtain Protection	Light Curtain acts if there is any obstruction between door panels, The door will be reopened. This function will not be available during fireman' s operation. Grade of light curtain protection: IP 65.	●
ANS-Anti-Nuisance Car Call Protection	If there is only one passenger in the car, and an excessive number of calls are registered, nuisance is detected and all car calls will be cancelled automatically, requiring registration of proper of calls.	●
LNS-Load Non Stop	When a car is loaded to predetermined percentage of its capacity, it is considered "full". The car will bypass further hall calls. Additional passengers would be unable to enter.	●
LWS-Overload Protection	If the load exceeds the rate load, the sound signal will be given out by speaker, and" OVERLOAD" will be displayed, the car door will not close, the elevator will not start.	●
Button Anti-adhesion Protection	If adhesion on a button due to mechanical fault, elevator will shield the button and no longer respond the order from this button.	●
Door Closing Torque Protection	Door operator had set the closing torque, in case of jamming over the torque, the door will not close by improving the torque.	●
ELTU-Emergency Light	Emergency light in the car will start whenever there is power cut.	●
ALARM-Alarm Bell	An alarm sound signal will be given to the outside by pressing alarm button in specific conditions.	●
DTC-Door Time Protection Close	If the car door does not close completely within an adjustable time after the door close command, after three unsuccessfully retries, the elevator will automatically enter protection state. When normal door closing is detected, elevator will recover to normal running.	●
DTO- Door Time Protection Open	If the car door does not open completely within an adjustable time after the door open command, car call and hall call signals will be automatically cancelled, and elevator will stop at the next floor and open its doors.	●
Door Panels Forced Closing Upon Gravity	If hall door connecting wires fails, gravity will force the main panel and auxiliary panel closed.	●
Mechanical Stop For Landing Door Forced Opening	The function is to protect the person outside the landing door in case that the wire rope of landing door brakes.	●
NTSD-End Protection	Both upper and lower terminal of elevator are equipped with terminal speed reducing switch, if the speed is not slowed to the pre-set value while the car reach the end floor, a forced deceleration will be carried out by system in order to protect the safety of the car.	●
EFO-Emergency Fireman Operation	fireman' s service, a car shall return non- stop to the designated return landing and park with doors fully open.	●
Fire Feedback	When fireman operation finished, a signal will be feedback to facilitate access to building system.	●

Local Leveling	If accidental fault occurs on elevator, current floor will be memorized, so that for recovery it' s no need to return to terminal landing, improves running efficiency.	●
Door Opening Prohibition Outside Door Zone	For safety, door opening is disabled outside door zone.	●
Fault Self-Diagnosis	When control circuit abnormal is detected, automatic stop the elevator to ensure the safe of passenger.	●
Fire Display	There is display inside of the car when the list enter into fireman operation.	●
ARD-Automatic Rescue Device	This device is used for rescue operation in case of power shutdown, it is powered by a rechargeable battery, when a sudden power cut happens, the car will move towards to the near floor, keep the door open to the passenger.	○
Earthquake Operation	With this function, in case of earthquake, earthquake detector acts and inputs signal to control system which drive elevator to near floor, open door to release passengers and stop.(Earthquake detector shall be solved by customer)	○
Core Closing Anti-stall Function	When elevator stops, it will start core closing circuit. During current producing for cutting line of magnetic force of permanent magnet, opposite torque is produced to avoid stall due to braking failure.	○
Light Sensor And Safety Edge Protection	Light sensor and mechanical safety edge can be option.	○
ACP-Anti Crime Protection	Anti-Crime Protection forces each car in the group to stop at pre-determined floor and open its door. This allows a security guard at the floor to visually inspect the passenger of the elevator before the car completely its run.	○
EFS-Emergency Fireman' s Service	EFS shall automatically place the car on independent service when the pre-set key is started, car calls will be cancelled automatically, only answer the car call inside to cooperate the fireman, this function need to match with the fire lift.	○
Password Floor Service	The special floor can be set the password through the button in car.	○
EPO-Emergency Power Operation	In case that regular power supply shuts down, the power supply of cars turns to Emergency Power, then cars in group except cars in inspection mode run to defined landing (or next landings) one by one. After arrival to rescue position, the cars open doors and let passengers out. It' s available to define a part of cars in group for normal service during EPO which is needed by some users. when the power supply is back to normal, the elevator in the group automatically return to normal running state.	○

▶ Basic functions

Function	Description	Remarks
Floor Display	There is arrow display in COP and HOP to show the running direction to passenger.	●
FCL-Full Collective Operation	All car and/or hall calls registered are answered in the order in which the landings are reached. Direction of travel will be established by the first car command/ hall call registered. All calls on its way will be served, irrespective of the time sequence in which the calls were registered.	●
ATT-Attendant Service	The attendant operation feature allows semi-automatic operation with manual control through the switch in COP.	●
Attendant Bypass	In state of attendant operation, if the button NSB in COP is pressed, elevator will not answer to hall call and directly run to destination floor.	●

MERIT ELEVATOR

Reminding for Attendant	When hall call is registered under ATT, corresponding command lamp will flash to remind attendant to learn situation of such registered. The function acts together with ATT.	●
VIP Independent Service	This function is designed for meeting VIP' S special needs. When switched on independent service the elevator will only answer the registered car call, regardless of the hall calls while opening or closing the door by manual control and operating according to VIP' s registered signals.	●
CBC-Cancel Error Calls	Before the car starts, the registration of a car or operation can be cancelled by double click of this button. After the car starts, registration cancel will not allowed for the sake of passengers safety. The function can be made available by parameter setting.	●
Automatic Elimination Of Reverse Command	When the first or last landing is reached and elevator has to reverse, autumatically commands originally registered will be eliminated.	●
Door Re-opening	During normal door closing, when car button that indicates the direction consistent to current running direction is pressed in hall, door will be re-opened.	●
DHB-Door Hold Button	Can adjust the door open time through the DHB on the COP when need to hold the door opening.	●
Locking At Main Landing	When locking switch is set, elevator back to main landing, stop using.	●
Braille Button	Push button with braille, convenient for blind.	●
Car Arrival Gong	During speed reduction and leveling, arrival gong on car top sounds to inform passenger and waiters of leveling and arriving.	●
Automatic Return To Main Landing	With this function, when there is no order or calls, after a period of time the elevator will automatic return to the main landing.	●
DOB/DCB –Door Open /Close Button	The door open/close button in car operation panel permits to open/close an automatic door, and keep it open/close by constant pressure.	●
DOB/DCB –Door Open /Close Button Light	Door open/close button will be highlighted if the buttons are pressed.	●
Separate Control DHT Of Car And Landing Door	The waiting time caused by hall call is longer than car call according to statistics, this function to improve the efficiency through independent adjust the door open holding time.	●
ADC-Advanced Door Closing	When the door is fully open and under the door hold period on normal running, push the door close button can close the door in advance.	●
Voice Calm	Overtime, overload, fireman operation, and leveling to nearest floor under fault, or open/close the door, automatic voice announcement will be played on calm and guide the passenger.	●
ADO-Advanced Door Opening	In order to accelerate traffic, automatic door opening starts while the elevator car approaches a landing.	●
Torque Compensation On Starting	To make the elevator more comfortable, system calculator the load in car, optimize it through compen-sating the torque on starting.	●
Digital Display In Car And Hall	16 digital display to show the position of elevator in COP and HOP.	●

LED Display In Car	Car display is LED.	●
DHB-Door Hold Button	Can adjust the door open time through the DHB on the COP when need to hold the door opening.	○
Voice Announcement	With the function, voice announcer announces floor to be reached on each landing, and forecast subsequent running direction before each door closing.	○
IC Card System	IC card management implements right management for specific floor through car and hall card reading system, intelligent manage the passengers. The function is only effective for elevator and can' t be integrated with other IC card management system in building.	○
RLEV-Re-Leveling Operation	Stopping error between the car sill and landing sill exceeds a limit due to load changing of passenger shall be corrected by automatically re-leveling.	○
Door Opening For Dtandby At Main Landing	With the function, when elevator is not used, it will wait with door opened at main landing.	○
Visit	The function is to open elevator for visitor.(The function acts together with building system and intelligent IC system)	○
Hall Arrival Gong	Up/down arrival gong will be provided in hall on each landing to inform passenger of arriving of elevator with this optional function.	○
Second Operation Panel	Second Operation Panel can be provided in addition to main operation panel, passenger can register and door operation via Second operation panel.	○
Operation Panel For Handicapped	Operation panel for handicapped can be selected for special operation by handicapped.	○
Machine Room Sound Insulation And Shock Absorber	There is sound insulation and shock absorber under the machine bearing, to reduce the noise between cabin and top floor.	○
FLP-Fan And Light Protection	Elevator will enter energy saving mode under no operation, turn off the car light and fan automatically within present time after door closing, and resume after new command is received.	○
PRK Parking	Elevator in same group will park on different floors once spare in order to shorten the response time.	○
CFT-Cafeteria Time	More open time for the cafeteria floor to meet with the requirement of the extra passenger flow.	○
MIT&MOT-Moderate Incoming &Outgoing Traffic	Aiming at relieving the traffic peak in the building, for example, morning peak or evening park, all the elevators on services at lobby will be activated once the load reached a predetermined value(generally 50%), and this model will continue at the predetermined peak times.(This function only available to triplex and group control.)	○
Multimedia Display	Multimedia Display can show the video or music ordered by customer.	○
Over Station Warning	Elevator will remind the passenger through buzzer over station, provide special service for blind passenger.	○
Time Setting	Time setting to auto control the elevator.	○

MERTI ELEVATOR

System Safety

Function	Description	Remarks
Contact Detection And Protection On Safety Contactor	The system detects reliable action of safety relay and contact on contactor. If nonconformity of action of contact with driving state of coils found, any ralated work in car will stopped.	●
Brake Feedback & Detection	Brake relay signal is always monitored. If nonconformity of actual state of brake relay with preset command is found, running will be stopped.	●
Independent Dual Brake	Independent actuators are used for the main engine.	●
Running Time Limiter	If leveling switch doesn' t act after continuous running for time specified by running time limiter and related, any work in car will be stopped.	●
Over Speed Protection	The function is to protect elevator against safety problem caused by running at speed out of control range.	●
Low Speed Protection	The function is to protect elevator against safety problem caused by running at speed lower than control range.	●
OHT-Drive Over Heat Protection	Self-protection mode will be achieved if the temp of the motor exceeds the preset value due to the heat made by motor itself or the high temp in the environment. The car stops at the nearest floor, unload and shut down the light and ventilation device; once the temp falls down to normal, the car will recovery.	●
Safety Circuit Fault Protection	When safety circuit fault signal is received, elevator will be subject to emergency stop, and prevented from running under fault.	●
Main Control CPU WDT Protection	WDT protection is provided on main control board. When fault of CPU or program is detected, WDT circuit will forcibly disconnect main controller output point and reset CPU.	●
Grid Flter Monitoring	If the voltage fluctuate continuously in one period, system will auto alarming.	●
Speed Detection	Once the system detect the actual running speed is unconformity with the preset speed, will shut off the safety circuit automatically and alarming.	●
RIN-Re-Initialized	When the power recovered from a cut, position signals cannot be given or the position cannot be detected, the car will move to lobby and reinitiate. After that the floor info can be display and the elevator backs to normal.	●
Recover Running	Elevator recover from shut off, if it' s out of the leveling zone, the system will run to the leveling position under lower speed, and auto open the door to recovery.	●

Maintenance Function

Function	Description	Remarks
Five Parties Intercom	The function is keep contact with machine room and monitoring center via intercom system provided on COP, car top and pit. Cable from machine room to monitoring center shall be solved by client.	●
Floor Height Self-Learning	Elevator automatically learns the floor height.	●
Self-Position Of Max. Torque	After each power failure recovery, elevator re-establishes the absolute position of max. Torque point to ensure running in high efficiency state.	●
Pit Ladder	Ladder is provided in pit for maintainer.	●
Fault Recording/Reference	The latest 20 faults can be recorded, including the fault time, floor and code.	●
TCI-Top Of Car Inspection	Inspection box is provided on the top of car, safer and easier for maintain.	●
Inspection In Machine Room	Inspection running can be carried out in machine room.	●
Leveling Adjustment	If there' s slightly deflection in elevator leveling, manual intervention can be implemented with the function.	●
Test Running	The function is designed for testing or examining new elevator. Elevator can automatically run after some parameters of AIO is established as state of test running. Total times of automatic running and interval between runs can both be established by parameter setting.	●
Full Shaft Double Control Lighting	Double control lighting is provided by installing lamps through shaft wall.	●

Extension Function

Function	Description	Remarks
Special Letter Display	Character shown on each floor can be set via manipulator. For example, shown B for Base floor.	○
Group Control	Used for two or more elevators, response with the optimize solution, avoid the repeat stopping, save the waiting time of passenger, increase the efficiency.	○
BA-Building Monitor Ports	Elevator with BA function can provide scattered elevator status for computer management of the building, such as running directions, floor numbers, safety signals, door signals.	○
REM	24 hours remote elevator monitoring can be implemented through internet or telephone line. Auto alarming to REM center when elevator faulty.	○
AMS-Area Monitoring Screen	It can be installed in the porter' s lodge, simply display the condition signals by LED indicators and lock/unlock the elevator.	○
Air Conditioner	Adjust the air in cabin, including temperature, humidity and cleanliness, to make a comfortable environment.	○
UV Sterilization	UV Sterilization system clean the air into the cabin.	○
Negative Oxygen Ions Bactericidal	Add the negative oxygen ions generator to the ventilation system, sterilization and purification of the air in cabin.	○

For more functions please consult the sales representatives.

MERTI ELEVATOR

LAYOUT

Sino-P

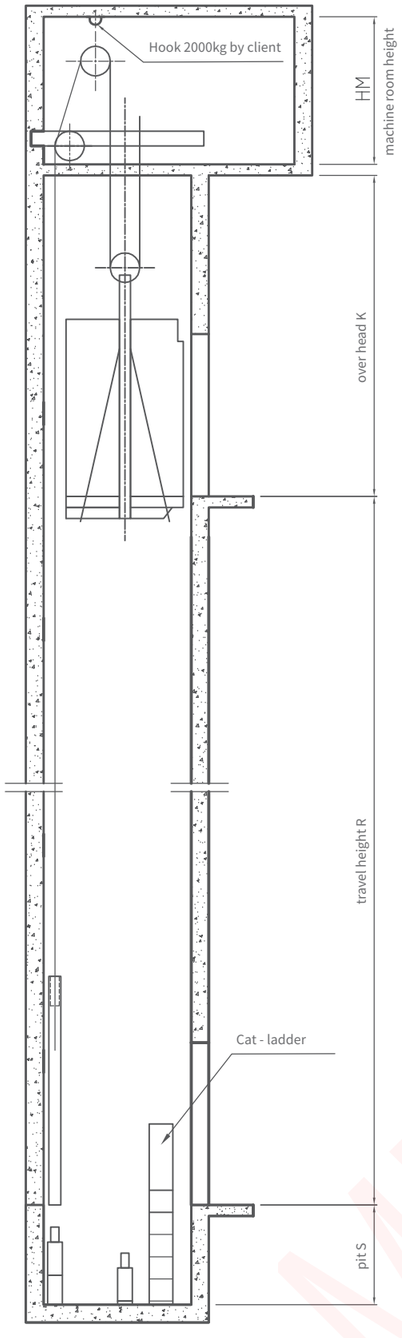

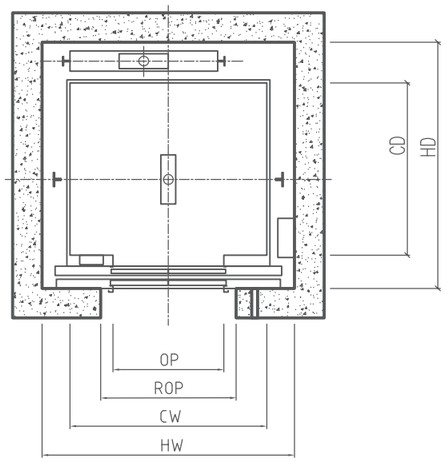

Hoistway Plan

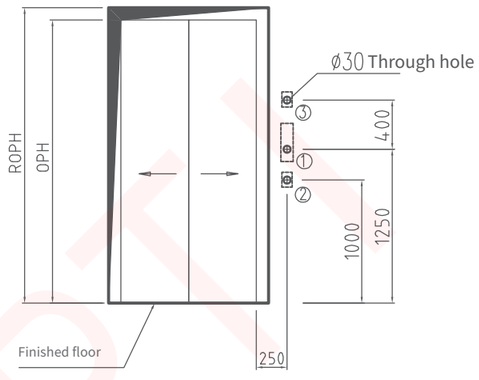

Front View

1.Button and display;
2.Lock switch (if with EFO) only on base floor;
3.Fire switch (if with EFO) only on base floor。

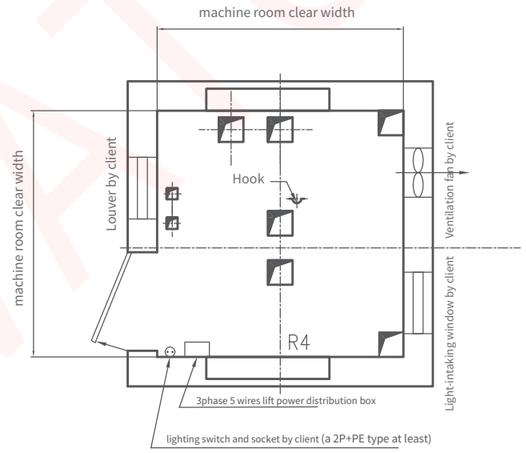

Machine Room Plan

Capacity (kg)	Speed (m/s)	Cabin inner size CW(mm)×CD(mm)	Opening size OP(mm)×OPH(mm)	Shaft inner size HW(mm)×HD(mm)	Min. pit depth S(mm)	Min. overhead K(mm)
630	1.0	1250X1300	800X2100 (2P-CO)	1750X1950	1350	3950
	1.5				1450	4050
	1.75				1450	4100
680	1.0	1400X1100	800X2100 (2P-CO)	1850X1750	1350	3950
	1.5				1450	4050
	1.75				1450	4100
800	1.0	1400X1350	800X2100 (2P-CO)	1850X1950	1350	3950
	1.5				1450	4050
	1.75				1450	4100
	2.0			1950X2100	1600	4600
	2.5				1750	4800
1000	1.0	1600X1400	900X2100 (2P-CO)	2050X2000	1350	3950
	1.5				1450	4050
	1.75				1450	4100
	2.0			2150X2100	1600	4600
	2.5				1750	4800
1050	1.0	1600X1500	900X2100 (2P-CO)	2050X2100	1350	3950
	1.5				1450	4050
	1.75				1450	4100
	2.0			2150X2200	1600	4600
	2.5				1750	4800
1150	1.0	2000X1350	1100X2100 (2P-CO)	2550X2100	1350	4350
	1.5				1450	4450
	1.75				1450	4500
	2.0				1600	4600
	2.5				1750	4850
1350	1.0	2000X1550	1100X2100 (2P-CO)	2550X2300	1350	4350
	1.5				1450	4450
	1.75				1450	4500
	2.0				1600	4600
	2.5				1750	4850
1600	1.0	2000X1750	1100X2100 (2P-CO)	2550X2500	1350	4350
	1.5				1450	4450
	1.75				1450	4550
	2.0				1600	4650
	2.5				1750	4850

· The pit depth and overhead is calculated under 1.75m/s and buffer distance 150mm.
· Above drawing is for reference only.

MERTI ELEVATOR

LAYOUT

Sino-P Stretcher elevator

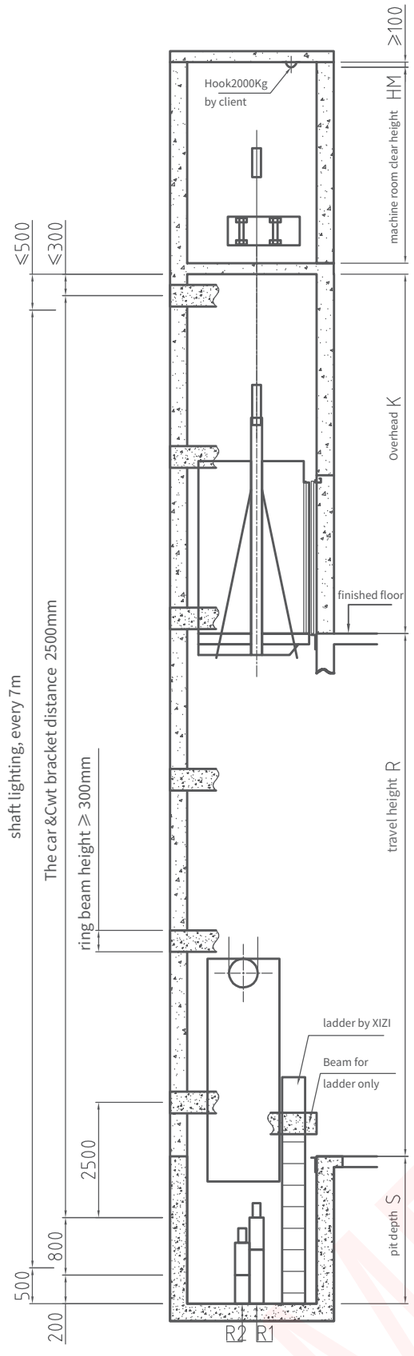

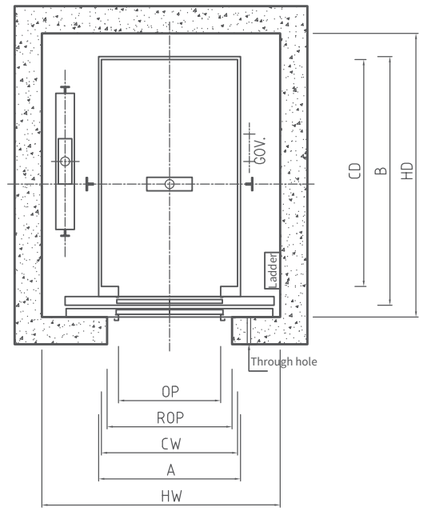

Hoistway Plan

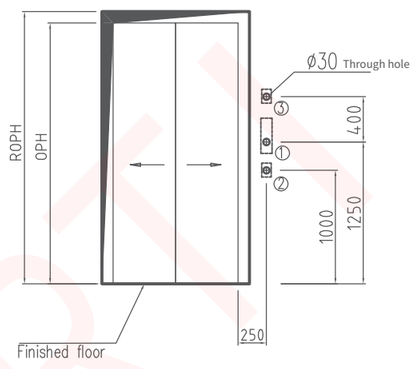

Front View

1.Button and display;
2.Lock switch (if with EFO) only on base floor;
3.Fire switch (if with EFO) only on base floor。

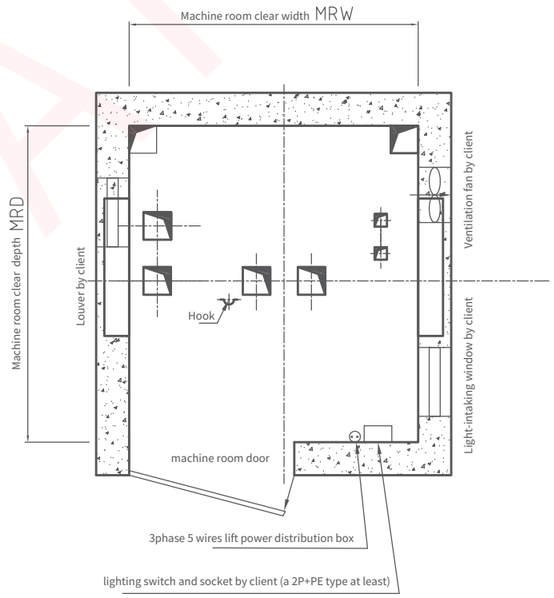

Machine Room Plan

Capacity (kg)	Speed (m/s)	Cabin inner size CW(mm)×CD(mm)	Opening size OP(mm)×OPH(mm)	Shaft inner size HW(mm)×HD(mm)	Min. pit depth S(mm)	Min. overhead K(mm)
1000	1.0	1100X2000	900X2100 (2P-CO)	2000X2500	1350	3950
	1.5				1450	4050
	1.75				1450	4100
	2.0				2050	5000
	2.5				2100	5050

·The pit depth and overhead is calculated based on 1.75m/s and buffer distance 150mm.
·Above drawing is for reference only.

MERTI ELEVATOR

LAYOUT

Sino-MRL

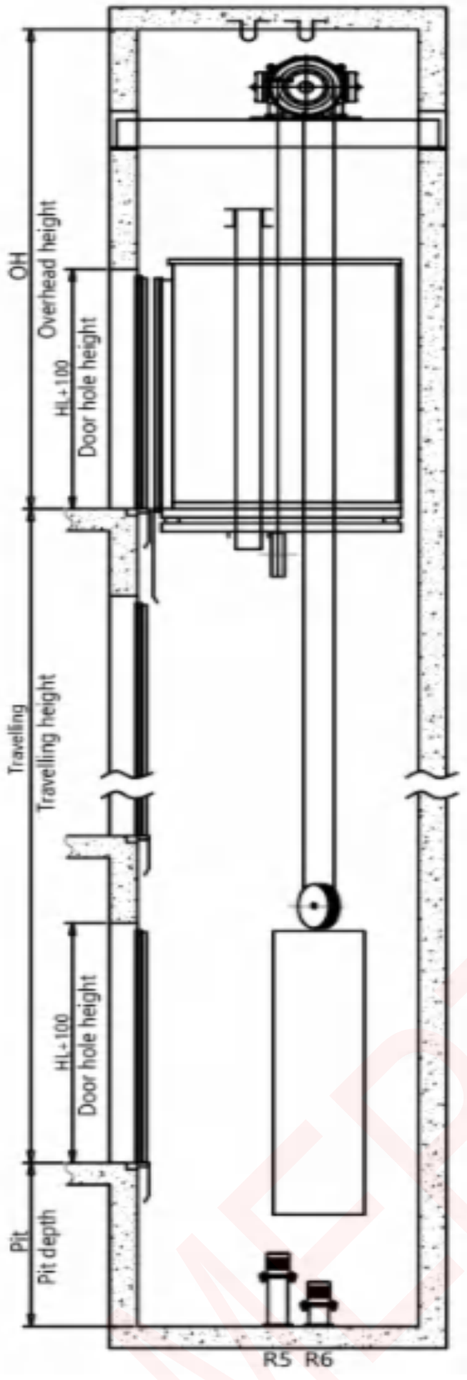

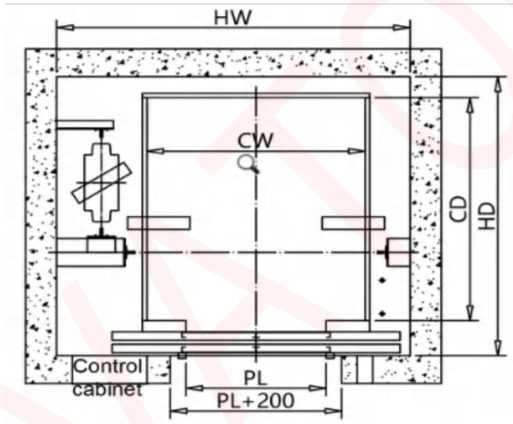

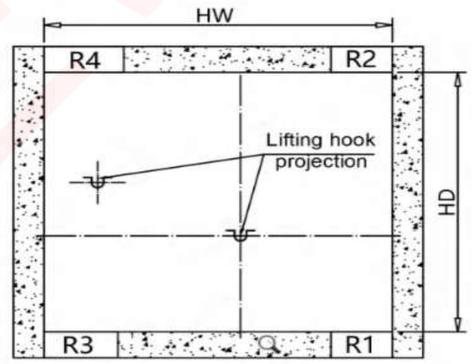

Load (kg)	Passenger No. (P)	Speed (m/s)	Car specification (CW×CD)	Door opening size (PL×HL)	Well size (HW×HD)	Pit depth Pit	Overhead height OH
630	8	1.0	1100×1400	800×2100	2000×1800	1400	4200
		1.5				1500	4400
		1.75				1600	4500
800	10	1.0	1350×1400	800×2100	2200×1800	1400	4200
		1.5				1500	4400
		1.75				1600	4500
1000	13	1.0	1400×1600	900×2100	2250×2000	1400	4200
		1.5				1500	4400
		1.75				1600	4500
1350	18	1.0	1600×1800	1000×2100	2600×2300	1500	4500
		1.5				1600	4600
		1.75				1700	4700
1600	21	1.0	1600×2100	1100×2100	2700×2500	1500	4500
		1.5				1600	4600
		1.75				1700	4700

· The pit depth and overhead is calculated based on buffer distance 150mm.
· Above drawing is for reference only.

MERTI ELEVATOR

LAYOUT

Sino-G(MR)

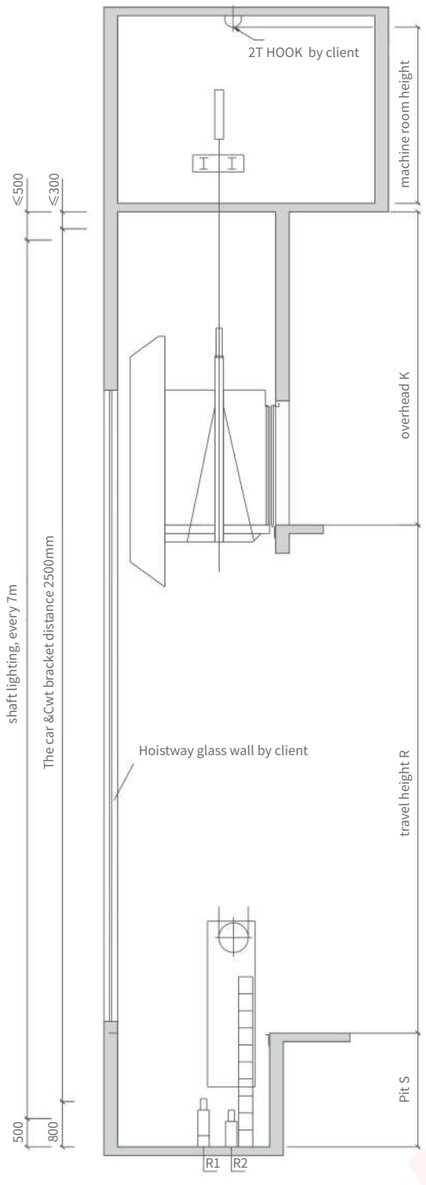

Section Drawing

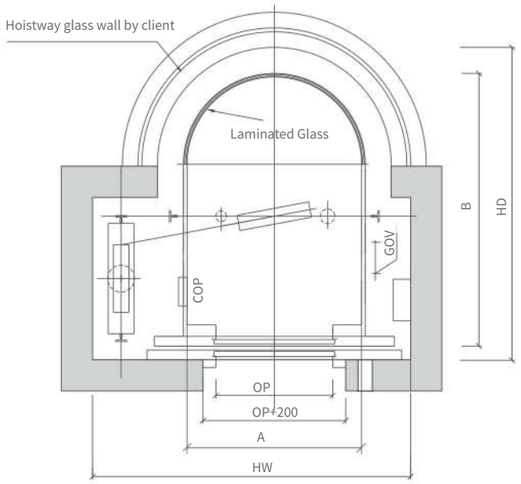

Hoistway Plan

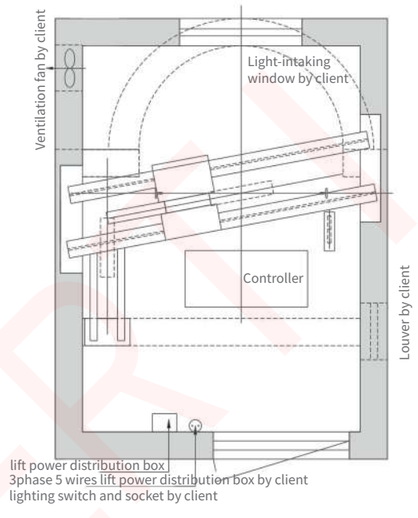

Machine Room Plan

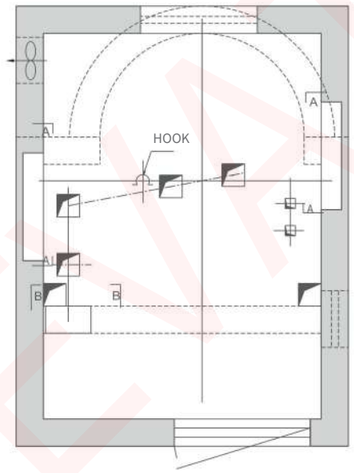

Machine Room Reserved Holes

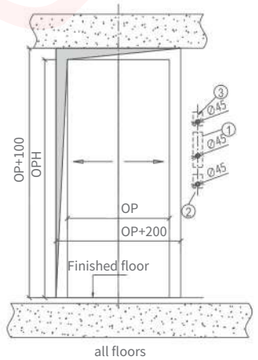

Front View





Counterweight center line

1.Button and display;
2.Lock switch (if with EFO) only on base floor;
3.Fire switch (if with EFO) only on base floor;
Suggest to use 45mm PVC tube for wire reservation

Capacity (kg)	Speed (m/s)	Cabin outer size A(mm)×B(mm)	Opening size OP(mm)×OPH(mm)	Shaft inner size HW(mm)×HD(mm)	Min. pit depth S(mm)	Min. overhead K(mm)
800	1.0	1250X2000	800X2100 (2P-CO)	2300X2305	2100	4650
	1.5				2250	4800
	1.75				2250	4850
1000	1.0	1400X2100	900X2100 (2P-CO)	2450X2405	2100	4650
	1.5				2250	4800
	1.75				2250	4850
1150	1.0	1500X2150	1000X2100 (2P-CO)	2650X2455	2100	4650
	1.5				2250	4800
	1.75				2250	4850
1350	1.0	1600X2250	1100X2100 (2P-CO)	2750X2550	2100	4650
	1.5				2250	4800
	1.75				2250	4850
1600	1.0	1800X2350	1100X2100 (2P-CO)	2850X2655	2100	4650
	1.5				2250	4800
	1.75				2250	4850

The above figures are for reference only

MERIT ELEVATOR