

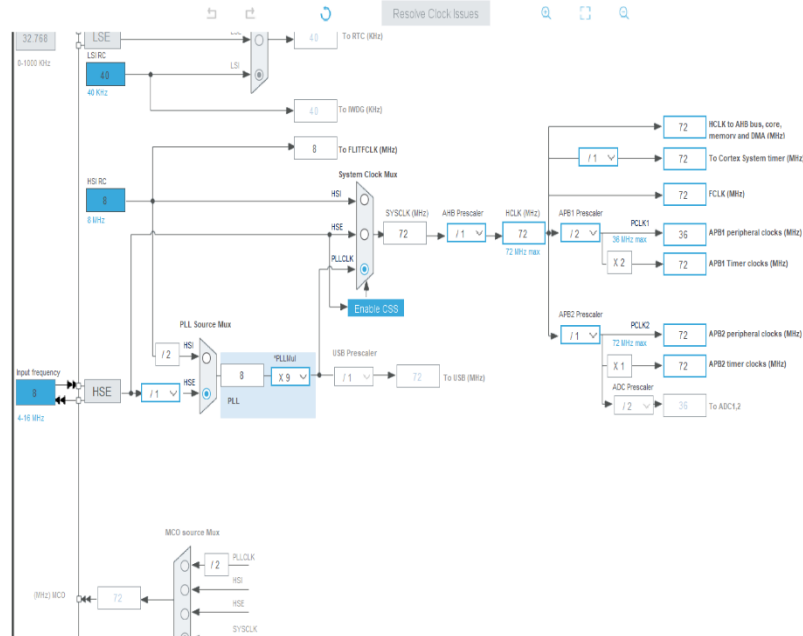


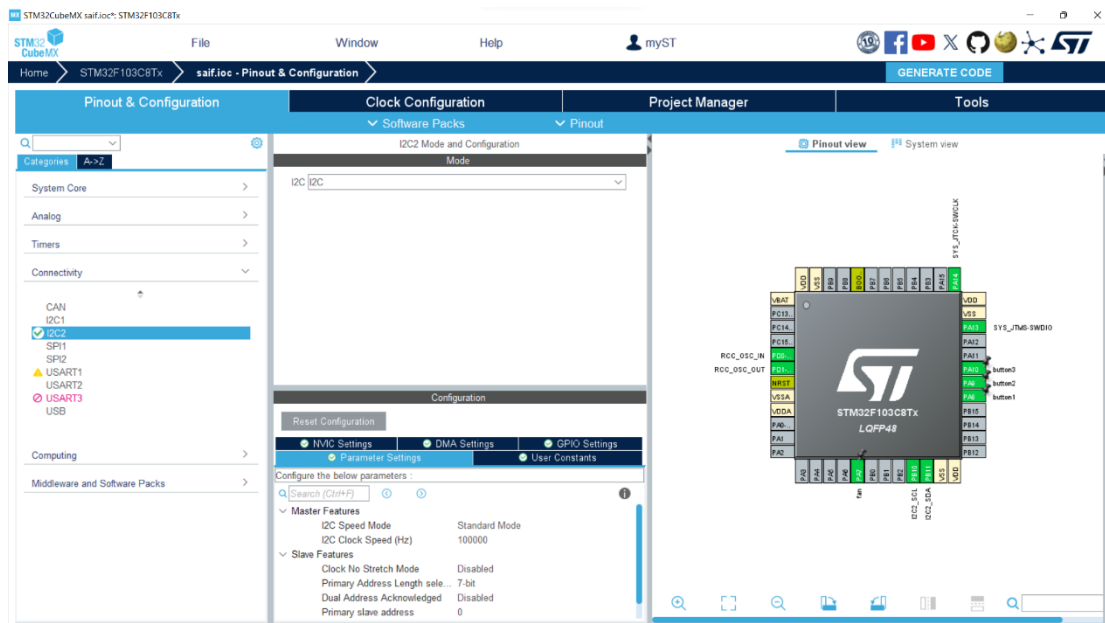

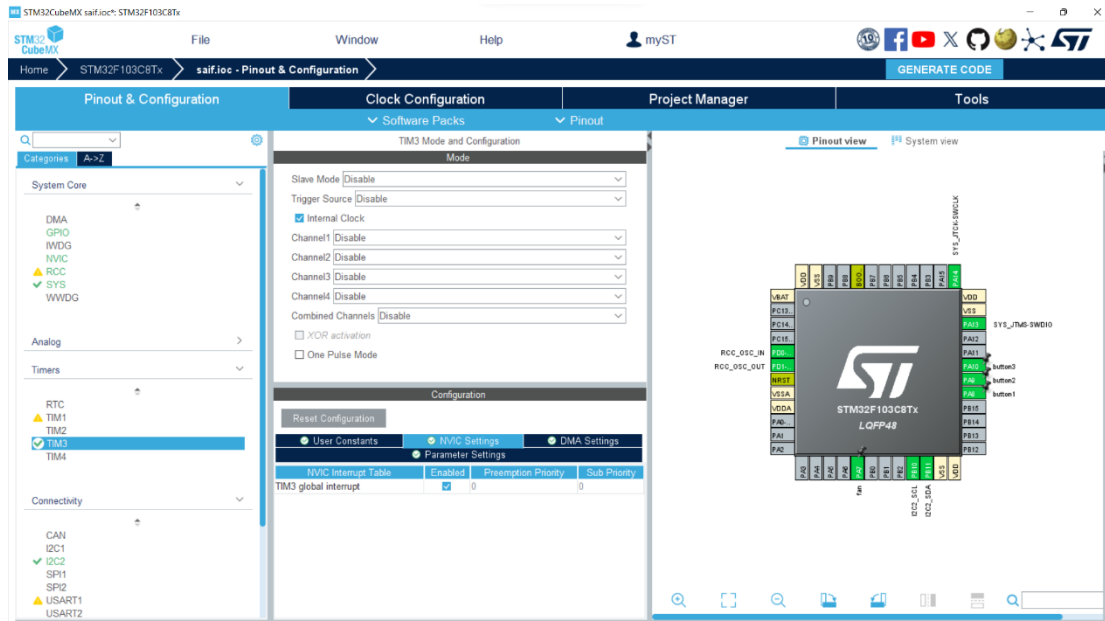

STM32CubeMX saif.ioch: STM32F103C8Tx

File Window Help myST

Home STM32F103C8Tx saif.ioch - Pinout & Configuration GENERATE CODE

Pinout & Configuration Clock Configuration Project Manager Tools

Software Packs Pinout

GPIO Mode and Configuration

Configuration

Group By Peripherals


GPIO DC RCC SYS

Search Signals Search (Ctrl+F) Show only Modified Pins

Pin	Signal	SPI0 ou	SPI0 m	SPI0 P	Maximu	User Label	Modified
PA7	n/a	Low	Output	No pull	Low	fan	☒
PA8	n/a	n/a	Input m...	Pull-up	n/a	button1	☒
PA9	n/a	n/a	Input m...	Pull-up	n/a	button2	☒
PA10	n/a	n/a	Input m...	Pull-up	n/a	button3	☒

Select Pins from table to configure them. Multiple selection is Allowed.

Pinout view System view

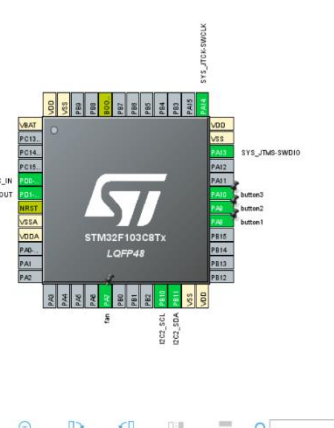

STM32CubeMX saif.ioch: STM32F103C8Tx

File Window Help myST

Home STM32F103C8Tx saif.ioch - Pinout & Configuration GENERATE CODE

Pinout & Configuration Clock Configuration Project Manager Tools

Software Packs Pinout

TIM3 Mode and Configuration

Mode

Slave Mode Disable

Trigger Source Disable

☒ Internal Clock

Channel1 Disable

Channel2 Disable

Channel3 Disable

Channel4 Disable

Combined Channels Disable

☐ XOR activation

☐ One Pulse Mode

Configuration

Reset Configuration

User Constants INVC Settings DMA Settings

Parameter Settings

Configure the below parameters :

Search (Ctrl+F)

Counter Settings

Prescaler (PSC - 16 bits value) 7199

Counter Mode Up

Counter Period (AutoReload ... 4999

Internal Clock Division (CKD) No Division

auto-reload preload Disable

Trigger Output (TRGO) Parameters

Master/Slave Mode (MSM bit) Disable (Trigger input effect not delayed)

Pinout view System view

Middleware

System Core Analog Timers Connectivity Computing

DMA

GPIO

NVIC

RCC

SYS

TIM3

ITC2