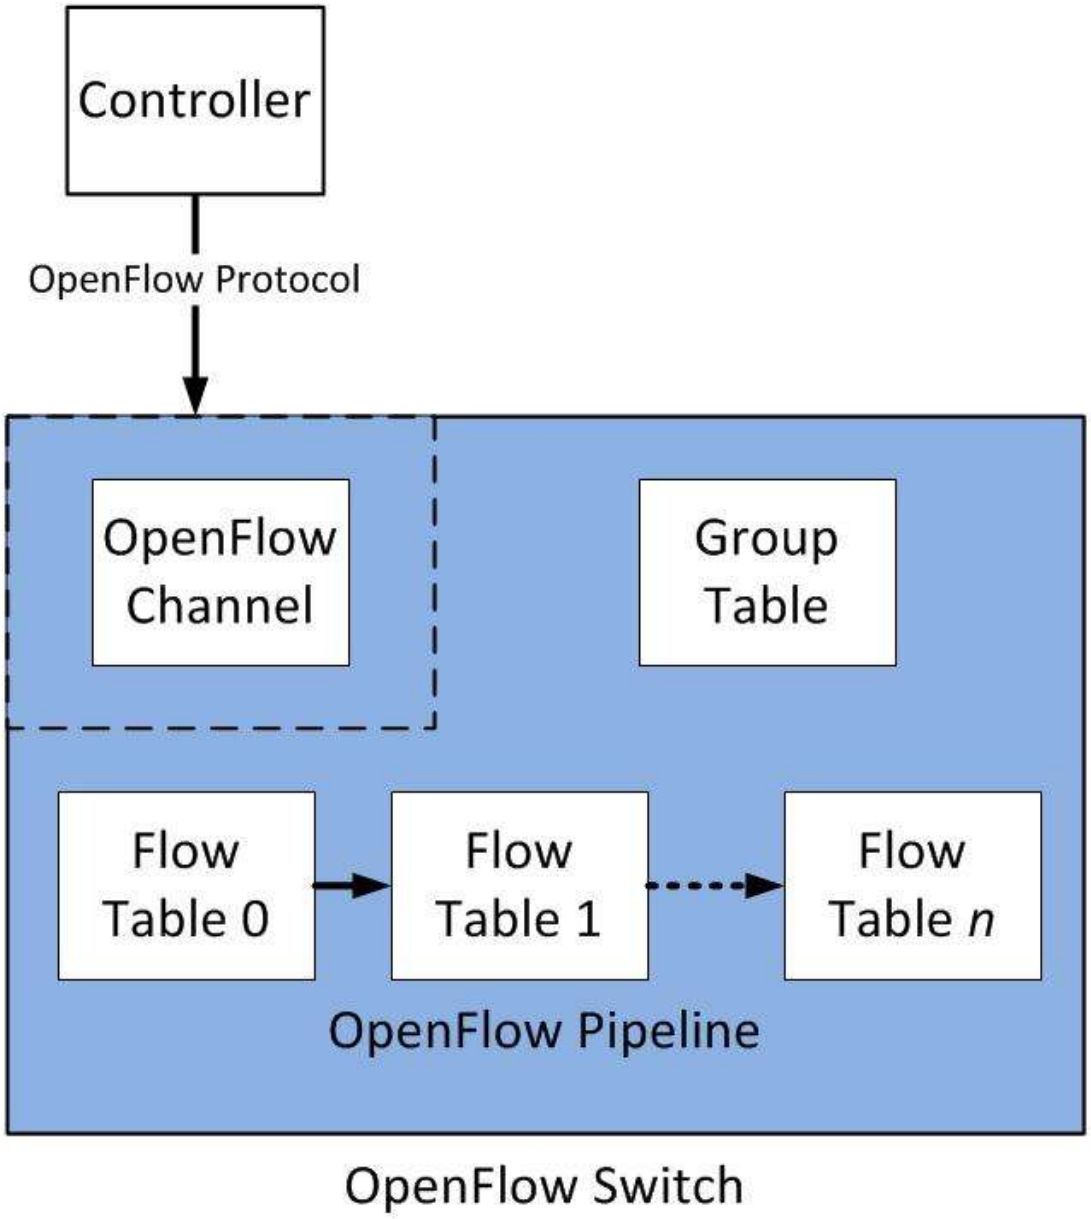


```
loading app topo_detect.py
loading app ryu.topology.switches
loading app ryu.controller.ofp_handler
instantiating app topo_detect.py of TopologyDetector
instantiating app ryu.topology.switches of Switches
instantiating app ryu.controller.ofp_handler of OFPHandler
```

```
*** Creating network
*** Adding controller
*** Adding hosts:
h1 h2
*** Adding switches:
s1 s2
*** Adding links:
(h1, s1) (h2, s2) (s2, s1)
*** Configuring hosts
h1 h2
*** Starting controller
c0
*** Starting 2 switches
s1 s2 ...
*** Starting CLI:
```

```
Switch entered: 1
Current Switches: [1, 2]
Current Links: [(1, 2)]
Switch entered: 2
Current Switches: [1, 2]
Current Links: [(1, 2), (2, 1)]
Link added: Link: Port<dpid=1, port_no=2, LIVE> to Port<dpid=2, port_no=2, LIVE>
Current Switches: [1, 2]
Current Links: [(1, 2), (2, 1)]
Link added: Link: Port<dpid=2, port_no=2, LIVE> to Port<dpid=1, port_no=2, LIVE>
Current Switches: [1, 2]
Current Links: [(1, 2), (2, 1)]
```

Capturing from Loopback: lo

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

openflow_v4

No.	Time	Source	Destination	Protocol	Length	Info
43	24.416166084	127.0.0.1	127.0.0.1	OpenFl…	98	Type: OFPT_FEATURES_REPLY
55	24.444141031	127.0.0.1	127.0.0.1	OpenFl…	98	Type: OFPT_FEATURES_REPLY
41	24.414625460	127.0.0.1	127.0.0.1	OpenFl…	74	Type: OFPT_FEATURES_REQUEST
48	24.431016277	127.0.0.1	127.0.0.1	OpenFl…	74	Type: OFPT_FEATURES_REQUEST
51	24.431299825	127.0.0.1	127.0.0.1	OpenFl…	146	Type: OFPT_FLOW_MOD
56	24.445627223	127.0.0.1	127.0.0.1	OpenFl…	162	Type: OFPT_FLOW_MOD
60	24.447434026	127.0.0.1	127.0.0.1	OpenFl…	146	Type: OFPT_FLOW_MOD
63	24.454785643	127.0.0.1	127.0.0.1	OpenFl…	162	Type: OFPT_FLOW_MOD
32	24.398565180	127.0.0.1	127.0.0.1	OpenFl…	74	Type: OFPT_HELLO
37	24.413711553	127.0.0.1	127.0.0.1	OpenFl…	82	Type: OFPT_HELLO
39	24.413862832	127.0.0.1	127.0.0.1	OpenFl…	82	Type: OFPT_HELLO
46	24.430941155	127.0.0.1	127.0.0.1	OpenFl…	74	Type: OFPT_HELLO
54	24.443651248	127.0.0.1	127.0.0.1	OpenFl…	274	Type: OFPT_MULTIPART_REPLY, OFPMP_PORT_DESC
62	24.453003162	127.0.0.1	127.0.0.1	OpenFl…	274	Type: OFPT_MULTIPART_REPLY, OFPMP_PORT_DESC
50	24.431283271	127.0.0.1	127.0.0.1	OpenFl…	82	Type: OFPT_MULTIPART_REQUEST, OFPMP_PORT_DESC

```
▸ Frame 328: 168 bytes on wire (1344 bits), 168 bytes captured (1344 bits) on interface lo, id 0
▾ Ethernet II, Src: 00:00:00_00:00:00 (00:00:00:00:00:00), Dst: 00:00:00_00:00:00 (00:00:00:00:00:00)
  ▸ Destination: 00:00:00_00:00:00 (00:00:00:00:00:00)
  ▸ Source: 00:00:00_00:00:00 (00:00:00:00:00:00)
    Type: IPv4 (0x0800)
▾ Internet Protocol Version 4, Src: 127.0.0.1, Dst: 127.0.0.1
    0100 .... = Version: 4
    .... 0101 = Header Length: 20 bytes (5)
  ▸ Differentiated Services Field: 0xc0 (DSCP: CS6, ECN: Not-ECT)
    Total Length: 154
    Identification: 0x0b88 (2952)
  ▸ Flags: 0x40, Don't fragment
    ...0 0000 0000 0000 = Fragment Offset: 0
    Time to Live: 64
    Protocol: TCP (6)
    Header Checksum: 0x3014 [validation disabled]
    [Header checksum status: Unverified]
    Source Address: 127.0.0.1
    Destination Address: 127.0.0.1
▸ Transmission Control Protocol, Src Port: 48124, Dst Port: 6653, Seq: 3276, Ack: 3676, Len: 102
▸ OpenFlow 1.3
```

OpenFlow 1.3 (openflow_v4), 102 bytes Packets: 2772 · Displayed: 1478 (53.3%)

Capturing from Loopback: lo

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

openflow_v4

No.	Time	Source	Destination	Protocol	Length	Info
1369	80.502923705	127.0.0.1	127.0.0.1	OpenFl…	168	Type: OFPT_PACKET_IN
1370	80.506107944	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
1372	81.247997946	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
1374	81.299898302	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
1376	81.301056415	127.0.0.1	127.0.0.1	OpenFl…	168	Type: OFPT_PACKET_IN
1377	81.304137142	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
1379	81.352065567	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
1381	81.404321117	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
1383	81.405338269	127.0.0.1	127.0.0.1	OpenFl…	168	Type: OFPT_PACKET_IN
1384	81.408975379	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
1386	82.056083629	127.0.0.1	127.0.0.1	OpenFl…	178	Type: OFPT_PACKET_IN
1387	82.059725438	127.0.0.1	127.0.0.1	OpenFl…	176	Type: OFPT_PACKET_OUT
1389	82.149392496	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
1391	82.200993509	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
1393	82.202085873	127.0.0.1	127.0.0.1	OpenFl…	168	Type: OFPT_PACKET_IN

```
▸ Frame 328: 168 bytes on wire (1344 bits), 168 bytes captured (1344 bits) on interface lo, id 0
▾ Ethernet II, Src: 00:00:00_00:00:00 (00:00:00:00:00:00), Dst: 00:00:00_00:00:00 (00:00:00:00:00:00)
  ▸ Destination: 00:00:00_00:00:00 (00:00:00:00:00:00)
  ▸ Source: 00:00:00_00:00:00 (00:00:00:00:00:00)
    Type: IPv4 (0x0800)
▾ Internet Protocol Version 4, Src: 127.0.0.1, Dst: 127.0.0.1
    0100 .... = Version: 4
    .... 0101 = Header Length: 20 bytes (5)
  ▸ Differentiated Services Field: 0xc0 (DSCP: CS6, ECN: Not-ECT)
    Total Length: 154
    Identification: 0x0b88 (2952)
  ▸ Flags: 0x40, Don't fragment
    ...0 0000 0000 0000 = Fragment Offset: 0
    Time to Live: 64
    Protocol: TCP (6)
    Header Checksum: 0x3014 [validation disabled]
    [Header checksum status: Unverified]
    Source Address: 127.0.0.1
    Destination Address: 127.0.0.1
▸ Transmission Control Protocol, Src Port: 48124, Dst Port: 6653, Seq: 3276, Ack: 3676, Len: 102
▸ OpenFlow 1.3
```

OpenFlow 1.3 (openflow_v4), 102 bytes Packets: 5773 · Displayed: 3194 (55.3%)

Capturing from Loopback: lo

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

openflow_v4

No.	Time	Source	Destination	Protocol	Length	Info
8749	550.193200217	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
8751	550.244625945	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
8753	550.245951845	127.0.0.1	127.0.0.1	OpenFl…	168	Type: OFPT_PACKET_IN
8754	550.248597032	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
8756	550.274113899	127.0.0.1	127.0.0.1	OpenFl…	150	Type: OFPT_PACKET_IN
8757	550.275479151	127.0.0.1	127.0.0.1	OpenFl…	148	Type: OFPT_PACKET_OUT
8758	550.276299849	127.0.0.1	127.0.0.1	OpenFl…	150	Type: OFPT_PACKET_IN
8759	550.277305073	127.0.0.1	127.0.0.1	OpenFl…	148	Type: OFPT_PACKET_OUT
8760	550.277575024	127.0.0.1	127.0.0.1	OpenFl…	150	Type: OFPT_PACKET_IN
8761	550.278711929	127.0.0.1	127.0.0.1	OpenFl…	162	Type: OFPT_FLOW_MOD
8762	550.279330392	127.0.0.1	127.0.0.1	OpenFl…	148	Type: OFPT_PACKET_OUT
8764	550.279592951	127.0.0.1	127.0.0.1	OpenFl…	150	Type: OFPT_PACKET_IN
8765	550.280613609	127.0.0.1	127.0.0.1	OpenFl…	162	Type: OFPT_FLOW_MOD
8766	550.280670303	127.0.0.1	127.0.0.1	OpenFl…	148	Type: OFPT_PACKET_OUT
8768	550.281066429	127.0.0.1	127.0.0.1	OpenFl…	206	Type: OFPT_PACKET_IN
8769	550.282187994	127.0.0.1	127.0.0.1	OpenFl…	162	Type: OFPT_FLOW_MOD
8770	550.282248021	127.0.0.1	127.0.0.1	OpenFl…	204	Type: OFPT_PACKET_OUT
8772	550.282467469	127.0.0.1	127.0.0.1	OpenFl…	206	Type: OFPT_PACKET_IN
8773	550.284384789	127.0.0.1	127.0.0.1	OpenFl…	162	Type: OFPT_FLOW_MOD
8774	550.284419049	127.0.0.1	127.0.0.1	OpenFl…	204	Type: OFPT_PACKET_OUT

```
▸ Frame 328: 168 bytes on wire (1344 bits), 168 bytes captured (1344 bits) on interface lo, id 0
▾ Ethernet II, Src: 00:00:00_00:00:00 (00:00:00:00:00:00), Dst: 00:00:00_00:00:00 (00:00:00:00:00:00)
  ▸ Destination: 00:00:00_00:00:00 (00:00:00:00:00:00)
  ▸ Source: 00:00:00_00:00:00 (00:00:00:00:00:00)
    Type: IPv4 (0x0800)
▾ Internet Protocol Version 4, Src: 127.0.0.1, Dst: 127.0.0.1
    0100 .... = Version: 4
    .... 0101 = Header Length: 20 bytes (5)
  ▸ Differentiated Services Field: 0xc0 (DSCP: CS6, ECN: Not-ECT)
    Total Length: 154
    Identification: 0x0b88 (2952)
  ▸ Flags: 0x40, Don't fragment
    ...0 0000 0000 0000 = Fragment Offset: 0
    Time to Live: 64
    Protocol: TCP (6)
    Header Checksum: 0x3014 [validation disabled]
    [Header checksum status: Unverified]
```

OpenFlow 1.3 (openflow_v4), 102 bytes Packets: 9723 · Displayed: 5457 (56.1%)

```
Link removed: Link: Port<dpid=1, port_no=2, DOWN> to Port<dpid=2, port_no=2, LIVE>
Current Switches: [1, 2]
Current Links: []
Link removed: Link: Port<dpid=2, port_no=2, LIVE> to Port<dpid=1, port_no=2, LIVE>
Current Switches: [1, 2]
Current Links: []
```

Capturing from Loopback: lo

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

openflow_v4

No.	Time	Source	Destination	Protocol	Length	Info
11860	748.491931817	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
11862	748.493031424	127.0.0.1	127.0.0.1	OpenFl…	168	Type: OFPT_PACKET_IN
11863	748.496103855	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
11865	748.544218107	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
11867	748.596558971	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
11869	748.597514670	127.0.0.1	127.0.0.1	OpenFl…	168	Type: OFPT_PACKET_IN
11870	748.600198156	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
11872	749.097215895	127.0.0.1	127.0.0.1	OpenFl…	146	Type: OFPT_PORT_STATUS
11873	749.097285226	127.0.0.1	127.0.0.1	OpenFl…	146	Type: OFPT_PORT_STATUS
11874	749.097354274	127.0.0.1	127.0.0.1	OpenFl…	146	Type: OFPT_PORT_STATUS
11875	749.097403219	127.0.0.1	127.0.0.1	OpenFl…	146	Type: OFPT_PORT_STATUS
11878	749.114029207	127.0.0.1	127.0.0.1	OpenFl…	146	Type: OFPT_PORT_STATUS
11900	749.341859549	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
11902	749.445368662	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
11904	750.243317404	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
11906	750.397563424	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
11908	751.144791881	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
11910	751.299272641	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
11912	752.046021793	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT
11914	752.201550858	127.0.0.1	127.0.0.1	OpenFl…	166	Type: OFPT_PACKET_OUT

```
▾ Internet Protocol Version 4, Src: 127.0.0.1, Dst: 127.0.0.1
    0100 .... = Version: 4
    .... 0101 = Header Length: 20 bytes (5)
  ▸ Differentiated Services Field: 0xc0 (DSCP: CS6, ECN: Not-ECT)
    Total Length: 154
    Identification: 0x0b88 (2952)
  ▸ Flags: 0x40, Don't fragment
    ...0 0000 0000 0000 = Fragment Offset: 0
    Time to Live: 64
    Protocol: TCP (6)
    Header Checksum: 0x3014 [validation disabled]
    [Header checksum status: Unverified]
    Source Address: 127.0.0.1
    Destination Address: 127.0.0.1
▸ Transmission Control Protocol, Src Port: 48124, Dst Port: 6653, Seq: 3276, Ack: 3676, Len: 102
▸ OpenFlow 1.3
```

OpenFlow 1.3 (openflow_v4), 102 bytes Packets: 12011 · Displayed: 6746 (56.2%)

*any

文件(F) 编辑(E) 视图(V) 跳转(G) 捕获(C) 分析(A) 统计(S) 电话(Y) 无线(W) 工具(T) 帮助(H)

openflow_v1

No.	Time	Source	Destination	Protocol	Length	Info
90	155.786052145	127.0.0.1	127.0.0.1	OpenFl…	76	Type: OFPT_HELLO
96	155.801112209	127.0.0.1	127.0.0.1	OpenFl…	76	Type: OFPT_FEATURES_REQUEST
98	155.801122690	127.0.0.1	127.0.0.1	OpenFl…	80	Type: OFPT_SET_CONFIG
100	155.803677369	127.0.0.1	127.0.0.1	OpenFl…	132	Type: OFPT_PORT_STATUS
102	155.804024852	127.0.0.1	127.0.0.1	OpenFl…	292	Type: OFPT_FEATURES_REPLY
107	155.815793315	127.0.0.1	127.0.0.1	OpenFl…	76	Type: OFPT_HELLO
111	155.823843864	127.0.0.1	127.0.0.1	OpenFl…	76	Type: OFPT_FEATURES_REQUEST
113	155.823859496	127.0.0.1	127.0.0.1	OpenFl…	80	Type: OFPT_SET_CONFIG
115	155.826150405	127.0.0.1	127.0.0.1	OpenFl…	132	Type: OFPT_PORT_STATUS
117	155.826341026	127.0.0.1	127.0.0.1	OpenFl…	292	Type: OFPT_FEATURES_REPLY
120	155.831139887	::	ff02::1:ffd3:9739	OpenFl…	172	Type: OFPT_PACKET_IN
122	155.831308322	::	ff02::1:ffd3:9739	OpenFl…	178	Type: OFPT_PACKET_OUT
127	155.831813177	::	ff02::1:ffd3:9739	OpenFl…	172	Type: OFPT_PACKET_IN
129	155.831939456	::	ff02::1:ffd3:9739	OpenFl…	178	Type: OFPT_PACKET_OUT
135	155.862329938	::	ff02::16	OpenFl…	176	Type: OFPT_PACKET_IN
137	155.862442159	::	ff02::16	OpenFl…	182	Type: OFPT_PACKET_OUT
153	155.864886341	fe80::4c9b:e2ff:fe7…	ff02::16	OpenFl…	176	Type: OFPT_PACKET_IN
155	155.864930181	fe80::4c9b:e2ff:fe7…	ff02::2	OpenFl…	156	Type: OFPT_PACKET_IN
157	155.864937737	fe80::94df:53ff:fe2…	ff02::16	OpenFl…	176	Type: OFPT_PACKET_IN
159	155.864943659	fe80::94df:53ff:fe2…	ff02::2	OpenFl…	156	Type: OFPT_PACKET_IN
161	155.864999834	fe80::4c9b:e2ff:fe7…	ff02::16	OpenFl…	182	Type: OFPT_PACKET_OUT
163	155.865022090	fe80::4c9b:e2ff:fe7…	ff02::2	OpenFl…	162	Type: OFPT_PACKET_OUT
165	155.865030176	fe80::94df:53ff:fe2…	ff02::16	OpenFl…	182	Type: OFPT_PACKET_OUT

```
▸ Frame 100: 132 bytes on wire (1056 bits), 132 bytes captured (1056 bits) on interface any, id 0
▸ Linux cooked capture
▸ Internet Protocol Version 4, Src: 127.0.0.1, Dst: 127.0.0.1
▸ Transmission Control Protocol, Src Port: 35362, Dst Port: 6633, Seq: 9, Ack: 29, Len: 64
▾ OpenFlow 1.0
    .000 0001 = Version: 1.0 (0x01)
  ▸ Type: OFPT_PORT_STATUS (12)
    Length: 64
    Transaction ID: 0
```

*any

文件(F) 编辑(E) 视图(V) 跳转(G) 捕获(C) 分析(A) 统计(S) 电话(Y) 无线(W) 工具(T) 帮助(H)

openflow_v1

No.	Time	Source	Destination	Protocol	Length	Info
711	165.171994271	4e:9b:e2:7c:cb:ec	96:df:53:2f:23:17	OpenFl…	134	Type: OFPT_PACKET_OUT
713	165.172003539	96:df:53:2f:23:17	Broadcast	OpenFl…	134	Type: OFPT_PACKET_OUT
719	165.172482694	192.168.0.101	192.168.0.102	OpenFl…	184	Type: OFPT_PACKET_IN
720	165.172539810	127.0.0.1	127.0.0.1	OpenFl…	148	Type: OFPT_FLOW_MOD
722	165.172550010	192.168.0.101	192.168.0.102	OpenFl…	190	Type: OFPT_PACKET_OUT
726	165.172971508	192.168.0.102	192.168.0.101	OpenFl…	184	Type: OFPT_PACKET_IN
727	165.173016389	127.0.0.1	127.0.0.1	OpenFl…	148	Type: OFPT_FLOW_MOD
729	165.173026560	192.168.0.102	192.168.0.101	OpenFl…	190	Type: OFPT_PACKET_OUT
733	165.175196693	96:df:53:2f:23:17	Broadcast	OpenFl…	128	Type: OFPT_PACKET_IN

```
▸ Frame 720: 148 bytes on wire (1184 bits), 148 bytes captured (1184 bits) on interface any, id 0
▸ Linux cooked capture
▸ Internet Protocol Version 4, Src: 127.0.0.1, Dst: 127.0.0.1
▸ Transmission Control Protocol, Src Port: 6633, Dst Port: 35362, Seq: 4777, Ack: 4865, Len: 80
▾ OpenFlow 1.0
    .000 0001 = Version: 1.0 (0x01)
    Type: OFPT_FLOW_MOD (14)
    Length: 80
    Transaction ID: 0
    Wildcards: 0
    In port: 1
    Ethernet source address: 96:df:53:2f:23:17 (96:df:53:2f:23:17)
    Ethernet destination address: 4e:9b:e2:7c:cb:ec (4e:9b:e2:7c:cb:ec)
    Input VLAN id: 65535
    Input VLAN priority: 0
    Pad: 00
    Dl type: 2048
    IP ToS: 0
    IP protocol: 1
    Pad: 0000
    Source Address: 192.168.0.101
    Destination Address: 192.168.0.102
    Source Port: 8
    Destination Port: 0
    Cookie: 0x0000000000000000
    Command: New flow (0)
    Idle time-out: 60
    hard time-out: 0
    Priority: 0
    Buffer Id: 0xffffffff
    Out port: 0
    Flags: 0
```

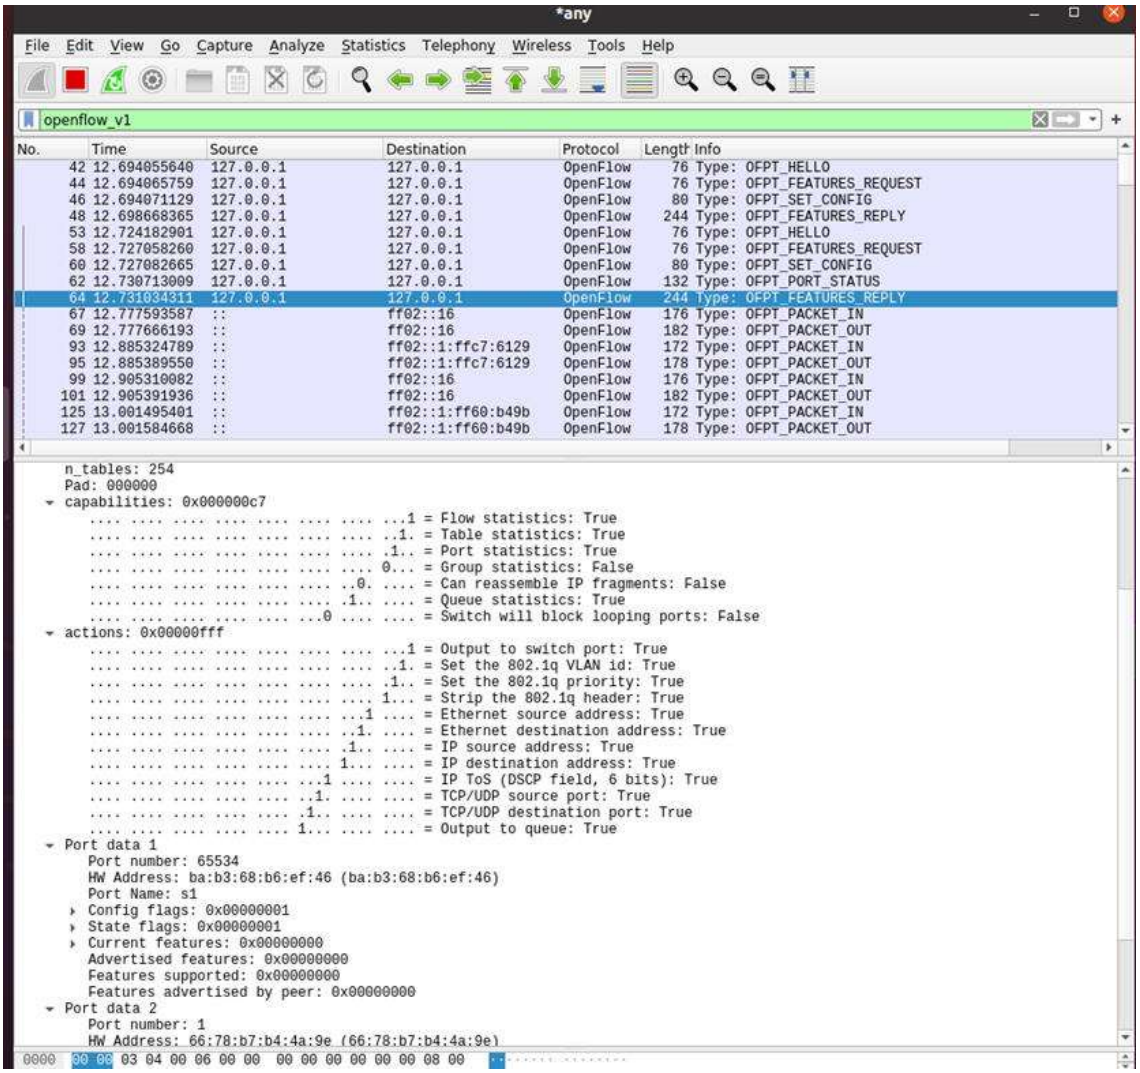
*any
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
openflow_v1
No. Time Source Destination Protocol Length Info
42 12.694055640 127.0.0.1 127.0.0.1 OpenFlow 76 Type: OFPT_HELLO
44 12.694065759 127.0.0.1 127.0.0.1 OpenFlow 76 Type: OFPT_FEATURES_REQUEST
46 12.694071129 127.0.0.1 127.0.0.1 OpenFlow 80 Type: OFPT_SET_CONFIG
48 12.698668365 127.0.0.1 127.0.0.1 OpenFlow 244 Type: OFPT_FEATURES_REPLY
53 12.724182901 127.0.0.1 127.0.0.1 OpenFlow 76 Type: OFPT_HELLO
58 12.727058260 127.0.0.1 127.0.0.1 OpenFlow 76 Type: OFPT_FEATURES_REQUEST
60 12.727082665 127.0.0.1 127.0.0.1 OpenFlow 80 Type: OFPT_SET_CONFIG
62 12.730713009 127.0.0.1 127.0.0.1 OpenFlow 132 Type: OFPT_PORT_STATUS
64 12.731034311 127.0.0.1 127.0.0.1 OpenFlow 244 Type: OFPT_FEATURES_REPLY
67 12.777593587 :: ff02::16 OpenFlow 176 Type: OFPT_PACKET_IN
69 12.777666193 :: ff02::16 OpenFlow 182 Type: OFPT_PACKET_OUT
93 12.885324789 :: ff02::1:ffc7:6129 OpenFlow 172 Type: OFPT_PACKET_IN
95 12.885389550 :: ff02::1:ffc7:6129 OpenFlow 178 Type: OFPT_PACKET_OUT
99 12.905310082 :: ff02::16 OpenFlow 176 Type: OFPT_PACKET_IN
101 12.905391936 :: ff02::16 OpenFlow 182 Type: OFPT_PACKET_OUT
125 13.001495401 :: ff02::1:ff60:b49b OpenFlow 172 Type: OFPT_PACKET_IN
127 13.001584668 :: ff02::1:ff60:b49b OpenFlow 178 Type: OFPT_PACKET_OUT
n_tables: 254
Pad: 000000
capabilities: 0x000000c7
....1 = Flow statistics: True
....1. = Table statistics: True
.... .1.. = Port statistics: True
.... 0... = Group statistics: False
....0. .... = Can reassemble IP fragments: False
.... .1.. .... = Queue statistics: True
....0 .... = Switch will block looping ports: False
actions: 0x00000fff
....1 = Output to switch port: True
....1. = Set the 802.1q VLAN id: True
.... .1.. = Set the 802.1q priority: True
.... 1... = Strip the 802.1q header: True
....1 .... = Ethernet source address: True
....1. .... = Ethernet destination address: True
.... .1.. .... = IP source address: True
.... 1... .... = IP destination address: True
....1 .... = IP ToS (DSCP field, 6 bits): True
....1. .... = TCP/UDP source port: True
.... .1.. .... = TCP/UDP destination port: True
.... 1... .... = Output to queue: True
Port data 1
Port number: 65534
HW Address: ba:b3:68:b6:ef:46 (ba:b3:68:b6:ef:46)
Port Name: s1
Config flags: 0x00000001
State flags: 0x00000001
Current features: 0x00000000
Advertised features: 0x00000000
Features supported: 0x00000000
Features advertised by peer: 0x00000000
Port data 2
Port number: 1
HW Address: 66:78:b7:b4:4a:9e (66:78:b7:b4:4a:9e)
0000 00 00 03 04 00 06 00 00 00 00 00 00 00 00 08 00