

Exp No: 17

```
#include <reg51.h>
```

```
void serial_ISR(void) interrupt 4
```

```
{  
    if (RI)  
    {  
        RI = 0;  
        P1 = SBUF;  
    }  
}
```


```
void main()
```

```
{  
    TMOD = 0x20;  
    TH1 = 0xFD;  
    SCON = 0x50;  
    TR1 = 1;  
    ES = 1;  
    EA = 1;  
  
    while(1);  
}
```

Code:

Output:

Before interrupt:

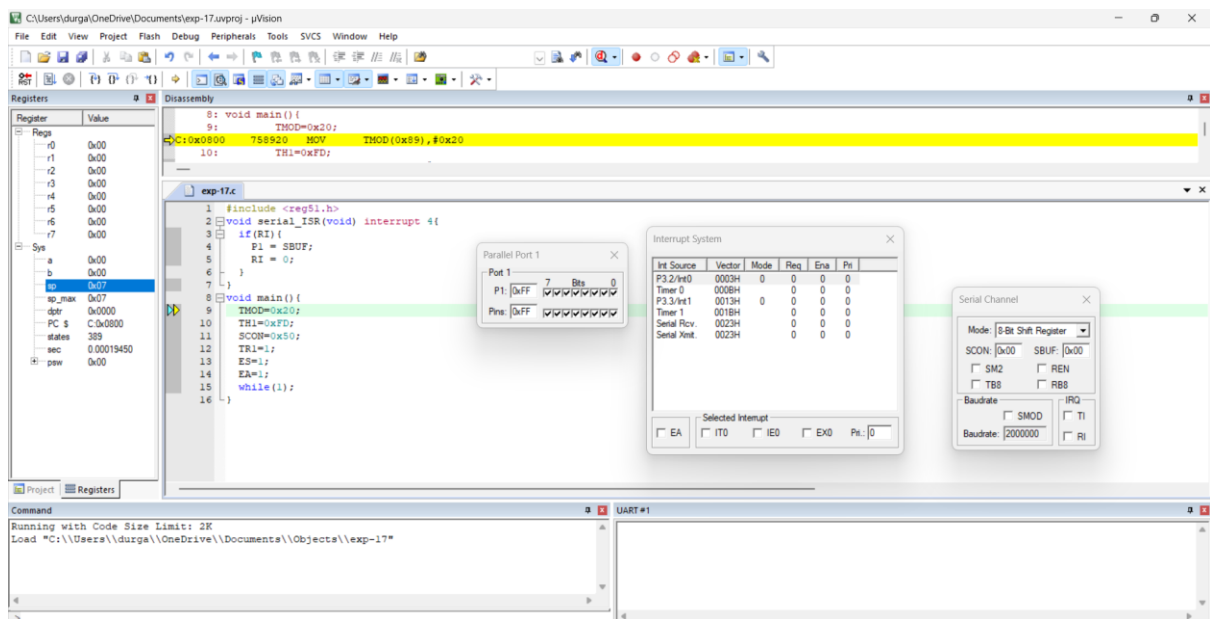

After interrupt:

