DOMINO

M230i-T4/T6

Modular and flexible Print & Apply labelling

With the **M2**30i-T4 and **M2**30i-T6 you will get the most flexible and safe Print & Apply solution on the market. Providing a choice of three standard stroke lengths, seven standard non stick pad sizes and left or right hand configuration, the **M2**30i-T4 and **M2**30i-T6 is highly configurable to meet your needs now and in the future.

Easy to operate - simple operation and unrivalled capability

◆ Clear monitoring & control with optional *TouchPanel* colour user interface
◆ Easy navigation and operation with intuitive *QuickStep* software
◆ Minimum downtime with tool-free magnetic printhead mounting system & expanding ribbon mandrels

Lower Total Cost of Ownership – reduced cost and increased efficiency

◆ Increased printhead life
◆ Lower material wastage with full label coverage allowing optimum label size
◆ Increased uptime with fast consumable and print head changes

Improved performance - sets the standard for efficiency

◆ 600m ribbon & label roll capacity within a compact footprint
◆ Increased print speed for reduced cycle times
◆ Robust design supports all mounting orientations
◆ Supply chain compliance with full GS1 coding capability at high resolution including bar codes, text and graphics
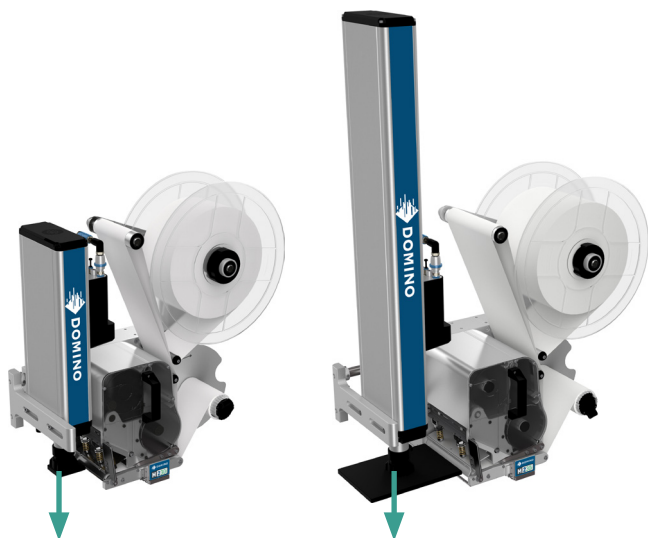
Domino. Do more.

Benefits of Tamp Applicator

◆ Flexible multi-purpose Print & Apply solution

◆ Labelling of moving or stationary products

◆ Accurate & consistent label position

◆ Easy and fast pad changes

◆ Side, top or bottom labelling

◆ Applies last label printed

◆ Industrial robust design

◆ Left and right hand versions as standard

Optional *QuickStep* User Interface

For effortless control and status reporting *QuickStep* is our unique, simplified operator interface that gets the printer into action quickly and simply. No complex menus or parameters, just enter the job and away you go.

◆ Quick access to favourite menus and settings via large user-friendly icons and customisable home screen.

◆ Easy, prompted input of data into label templates.

◆ Speed up changeovers and help eliminate coding selection errors with simplified Message Store and live WYSIWYG preview.

Technical Specification **M2**30i-T4/T6

Print technologie:	Thermal Transfer
Print resolution:	12 dots/mm (300dpi)
Typical speeds:	10-85 labels per min
Label sizes:	32x55mm to 150x210mm
Label & ribbon lengths:	600m
Distance to product:	Up to 560mm
Pneumatics:	6 bar compressed air
Communication:	2 x RS232, 1 x USB 2.0, Ethernet
I/Os (configurable):	10 Inputs and 10 Outputs
User interface:	Graphical display with 25 languages
Overall Dimensions: (LxHxW)	560x625x272mm (Printer & Applicator min)
	671x952x327mm (Printer & Applicator max)
	406x278x129mm (Controller - PCU)

www.dominoprinting.com

Domino. Do more.