


PC-PT
PC0
PC-PT
PC1
2960-24TT
Switch0
2960-24TT
Switch1

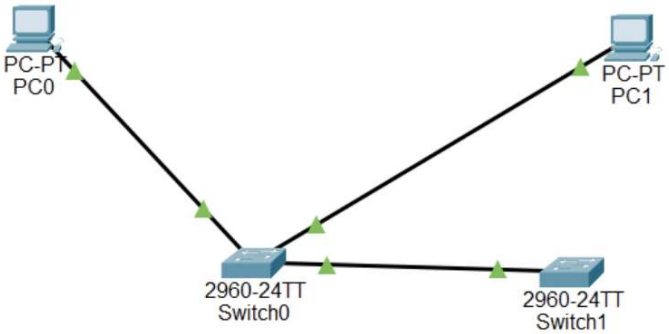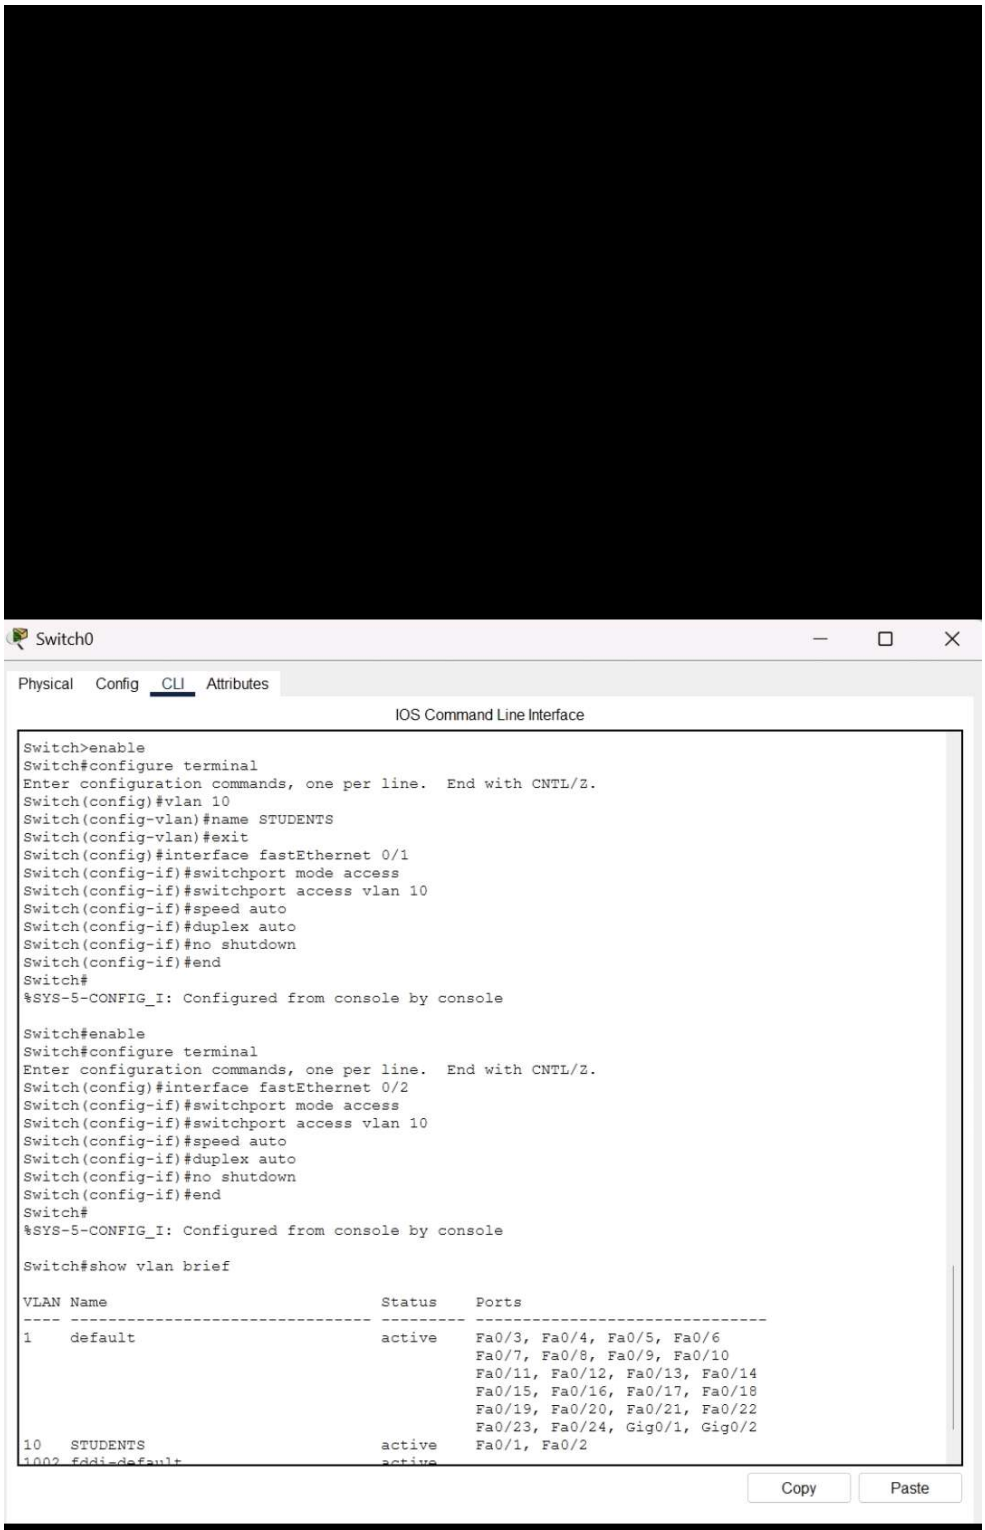

Switch0

Physical Config CLI Attributes

IOS Command Line Interface

```
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name STUDENTS
Switch(config-vlan)#exit
Switch(config)#interface fastEthernet 0/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#speed auto
Switch(config-if)#duplex auto
Switch(config-if)#no shutdown
Switch(config-if)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console


Switch#enable
Switch#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#interface fastEthernet 0/2
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#speed auto
Switch(config-if)#duplex auto
Switch(config-if)#no shutdown
Switch(config-if)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console

Switch#show vlan brief

VLAN Name                              Status    Ports
---- --------------------------------- --------- -------------------------------
1    default                           active    Fa0/3, Fa0/4, Fa0/5, Fa0/6
                                                 Fa0/7, Fa0/8, Fa0/9, Fa0/10
                                                 Fa0/11, Fa0/12, Fa0/13, Fa0/14
                                                 Fa0/15, Fa0/16, Fa0/17, Fa0/18
                                                 Fa0/19, Fa0/20, Fa0/21, Fa0/22
                                                 Fa0/23, Fa0/24, Gig0/1, Gig0/2
10   STUDENTS                          active    Fa0/1, Fa0/2
1002 fddi-default                      active
```

Copy Paste

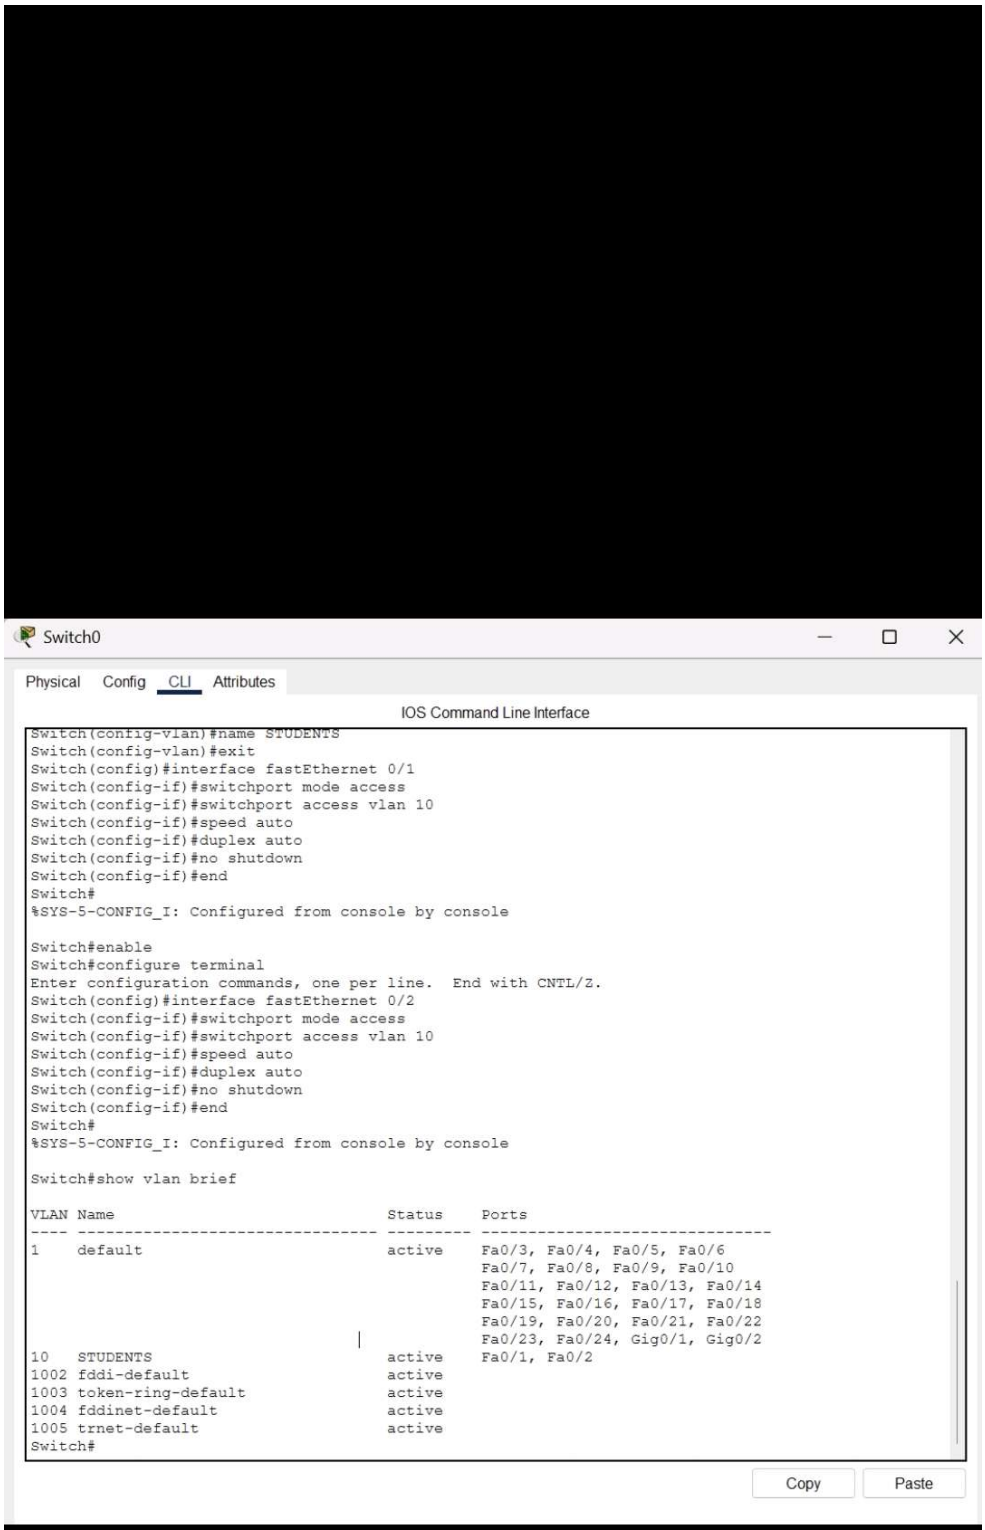


Switch0
Physical
Config
CLI
Attributes
IOS Command Line Interface
Switch(config-vlan)#name STUDENTS
Switch(config-vlan)#exit
Switch(config)#interface fastEthernet 0/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#speed auto
Switch(config-if)#duplex auto
Switch(config-if)#no shutdown
Switch(config-if)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console
Switch#enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface fastEthernet 0/2
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#speed auto
Switch(config-if)#duplex auto
Switch(config-if)#no shutdown
Switch(config-if)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console
Switch#show vlan brief
VLAN Name Status Ports
1 default active Fa0/3, Fa0/4, Fa0/5, Fa0/6
Fa0/7, Fa0/8, Fa0/9, Fa0/10
Fa0/11, Fa0/12, Fa0/13, Fa0/14
Fa0/15, Fa0/16, Fa0/17, Fa0/18
Fa0/19, Fa0/20, Fa0/21, Fa0/22
Fa0/23, Fa0/24, Gig0/1, Gig0/2
10 STUDENTS active Fa0/1, Fa0/2
1002 fddi-default active
1003 token-ring-default active
1004 fddinet-default active
1005 trnet-default active
Switch#
Copy
Paste



Switch0

Physical Config CLI Attributes


IOS Command Line Interface

```
Switch#show vlan brief

VLAN Name                              Status    Ports
---- --------------------------------- --------- -------------------------------
1    default                           active    Fa0/3, Fa0/4, Fa0/5, Fa0/6
                                                 Fa0/7, Fa0/8, Fa0/9, Fa0/10
                                                 Fa0/11, Fa0/12, Fa0/13, Fa0/14
                                                 Fa0/15, Fa0/16, Fa0/17, Fa0/18
                                                 Fa0/19, Fa0/20, Fa0/21, Fa0/22
                                                 Fa0/23, Fa0/24, Gig0/1, Gig0/2
10   STUDENTS                          active    Fa0/1, Fa0/2
1002 fddi-default                      active
1003 token-ring-default                active
1004 fddinet-default                   active
1005 trnet-default                     active
Switch#
Switch#show interfaces fastEthernet 0/1
FastEthernet0/1 is up, line protocol is up (connected)
  Hardware is Lance, address is 0009.7c2a.b301 (bia 0009.7c2a.b301)
 BW 100000 Kbit, DLY 100 usec,
     reliability 255/255, txload 1/255, rxload 1/255
  Encapsulation ARPA, loopback not set
  Keepalive set (10 sec)
  Full-duplex, 100Mb/s
  input flow-control is off, output flow-control is off
  ARP type: ARPA, ARP Timeout 00:04:00
  Last input 00:00:08, output 00:00:05, output hang never
  Last clearing of "show interface" counters never
  Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
  Queueing strategy: fifo
  Output queue :0/40 (size/max)
  5 minute input rate 0 bits/sec, 0 packets/sec
  5 minute output rate 0 bits/sec, 0 packets/sec
     956 packets input, 193351 bytes, 0 no buffer
     Received 956 broadcasts, 0 runts, 0 giants, 0 throttles
     0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
     0 watchdog, 0 multicast, 0 pause input
     0 input packets with dribble condition detected
     2357 packets output, 263570 bytes, 0 underruns
 --More--
```

Copy Paste



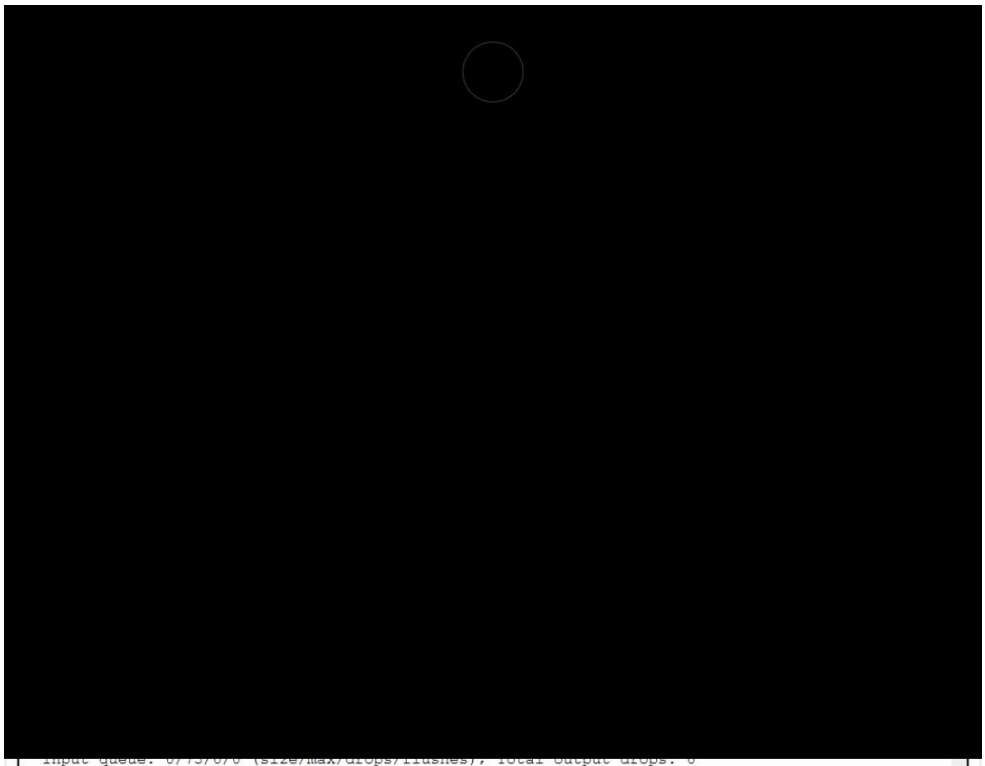

```
  Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
  Queueing strategy: fifo
  Output queue :0/40 (size/max)
  5 minute input rate 0 bits/sec, 0 packets/sec
  5 minute output rate 0 bits/sec, 0 packets/sec
     956 packets input, 193351 bytes, 0 no buffer
     Received 956 broadcasts, 0 runts, 0 giants, 0 throttles
     0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
     0 watchdog, 0 multicast, 0 pause input
     0 input packets with dribble condition detected
     2357 packets output, 263570 bytes, 0 underruns
     0 output errors, 0 collisions, 10 interface resets
     0 babbles, 0 late collision, 0 deferred
     0 lost carrier, 0 no carrier
     0 output buffer failures, 0 output buffers swapped out

Switch#
Switch#enable
Switch#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#interface fastEthernet 0/24
Switch(config-if)#switchport mode trunk

Switch(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/24, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/24, changed state to up
no shutdown
Switch(config-if)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console
```

Copy Paste







```
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/24, changed state to up


Switch>enable
Switch#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name STUDENTS
Switch(config-vlan)#exit
Switch(config)#interface fastEthernet 0/24
Switch(config-if)#switchport mode trunk
Switch(config-if)#no shutdown
Switch(config-if)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console
```

Copy Paste

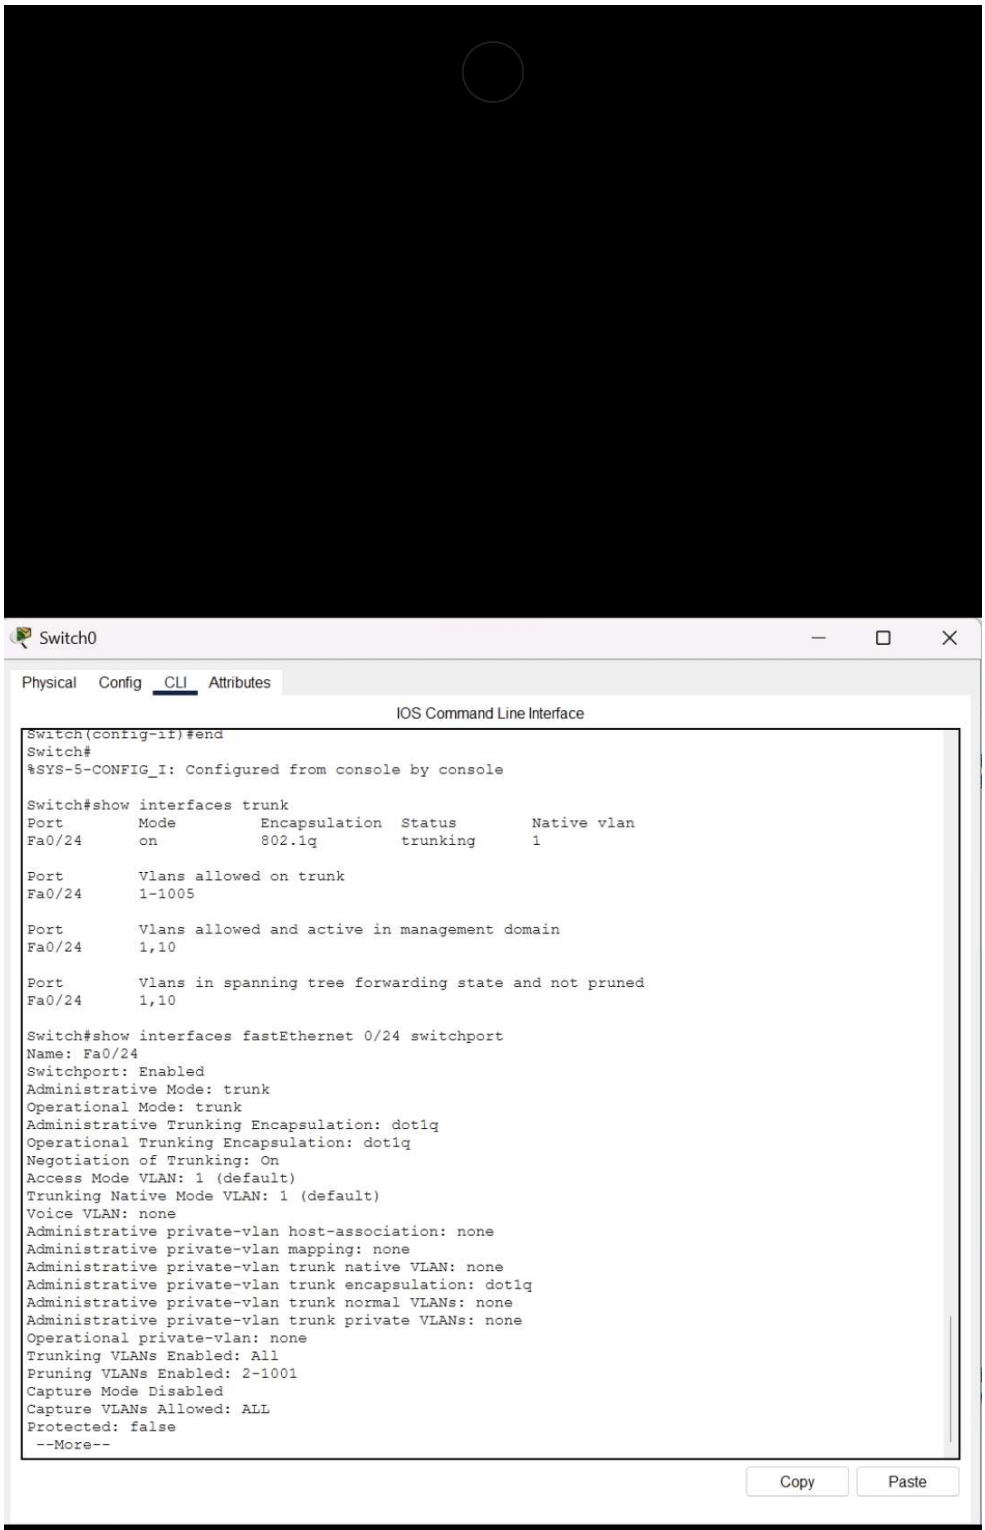


Switch0
Physical
Config
CLI
Attributes
IOS Command Line Interface
Switch(config-if)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console
Switch#show interfaces trunk
Port Mode Encapsulation Status Native vlan
Fa0/24 on 802.1q trunking 1
Port Vlans allowed on trunk
Fa0/24 1-1005
Port Vlans allowed and active in management domain
Fa0/24 1,10
Port Vlans in spanning tree forwarding state and not pruned
Fa0/24 1,10
Switch#show interfaces fastEthernet 0/24 switchport
Name: Fa0/24
Switchport: Enabled
Administrative Mode: trunk
Operational Mode: trunk
Administrative Trunking Encapsulation: dot1q
Operational Trunking Encapsulation: dot1q
Negotiation of Trunking: On
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Voice VLAN: none
Administrative private-vlan host-association: none
Administrative private-vlan mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Trunking VLANs Enabled: All
Pruning VLANs Enabled: 2-1001
Capture Mode Disabled
Capture VLANs Allowed: ALL
Protected: false
--More--
Copy
Paste

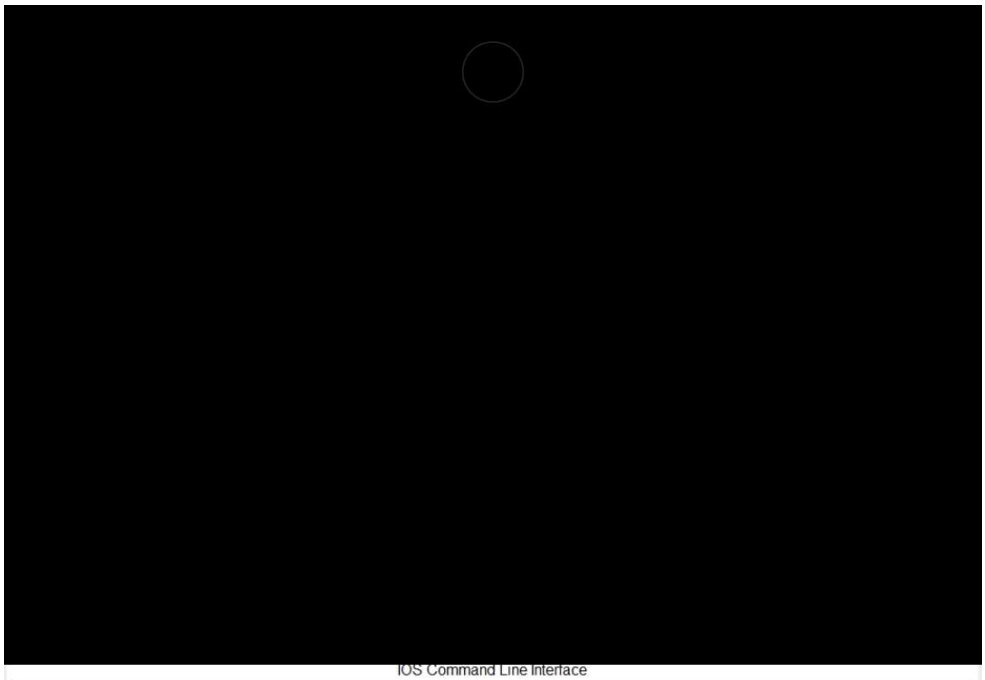

IOS Command Line Interface


```
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Trunking VLANs Enabled: All
Pruning VLANs Enabled: 2-1001
Capture Mode Disabled
Capture VLANs Allowed: ALL
Protected: false
Unknown unicast blocked: disabled
Unknown multicast blocked: disabled
Appliance trust: none


Switch#show interfaces fastEthernet 0/1
FastEthernet0/1 is up, line protocol is up (connected)
  Hardware is Lance, address is 0009.7c2a.b301 (bia 0009.7c2a.b301)
 BW 100000 Kbit, DLY 100 usec,
     reliability 255/255, txload 1/255, rxload 1/255
  Encapsulation ARPA, loopback not set
  Keepalive set (10 sec)
  Full-duplex, 100Mb/s
  input flow-control is off, output flow-control is off
  ARP type: ARPA, ARP Timeout 00:04:00
  Last input 00:00:08, output 00:00:05, output hang never
  Last clearing of "show interface" counters never
  Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
  Queueing strategy: fifo
  Output queue :0/40 (size/max)
  5 minute input rate 0 bits/sec, 0 packets/sec
  5 minute output rate 0 bits/sec, 0 packets/sec
     956 packets input, 193351 bytes, 0 no buffer
     Received 956 broadcasts, 0 runts, 0 giants, 0 throttles
     0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
     0 watchdog, 0 multicast, 0 pause input
     0 input packets with dribble condition detected
     2357 packets output, 263570 bytes, 0 underruns
     0 output errors, 0 collisions, 10 interface resets
     0 babbles, 0 late collision, 0 deferred
     0 lost carrier, 0 no carrier
     0 output buffer failures, 0 output buffers swapped out

Switch#
```

Copy Paste

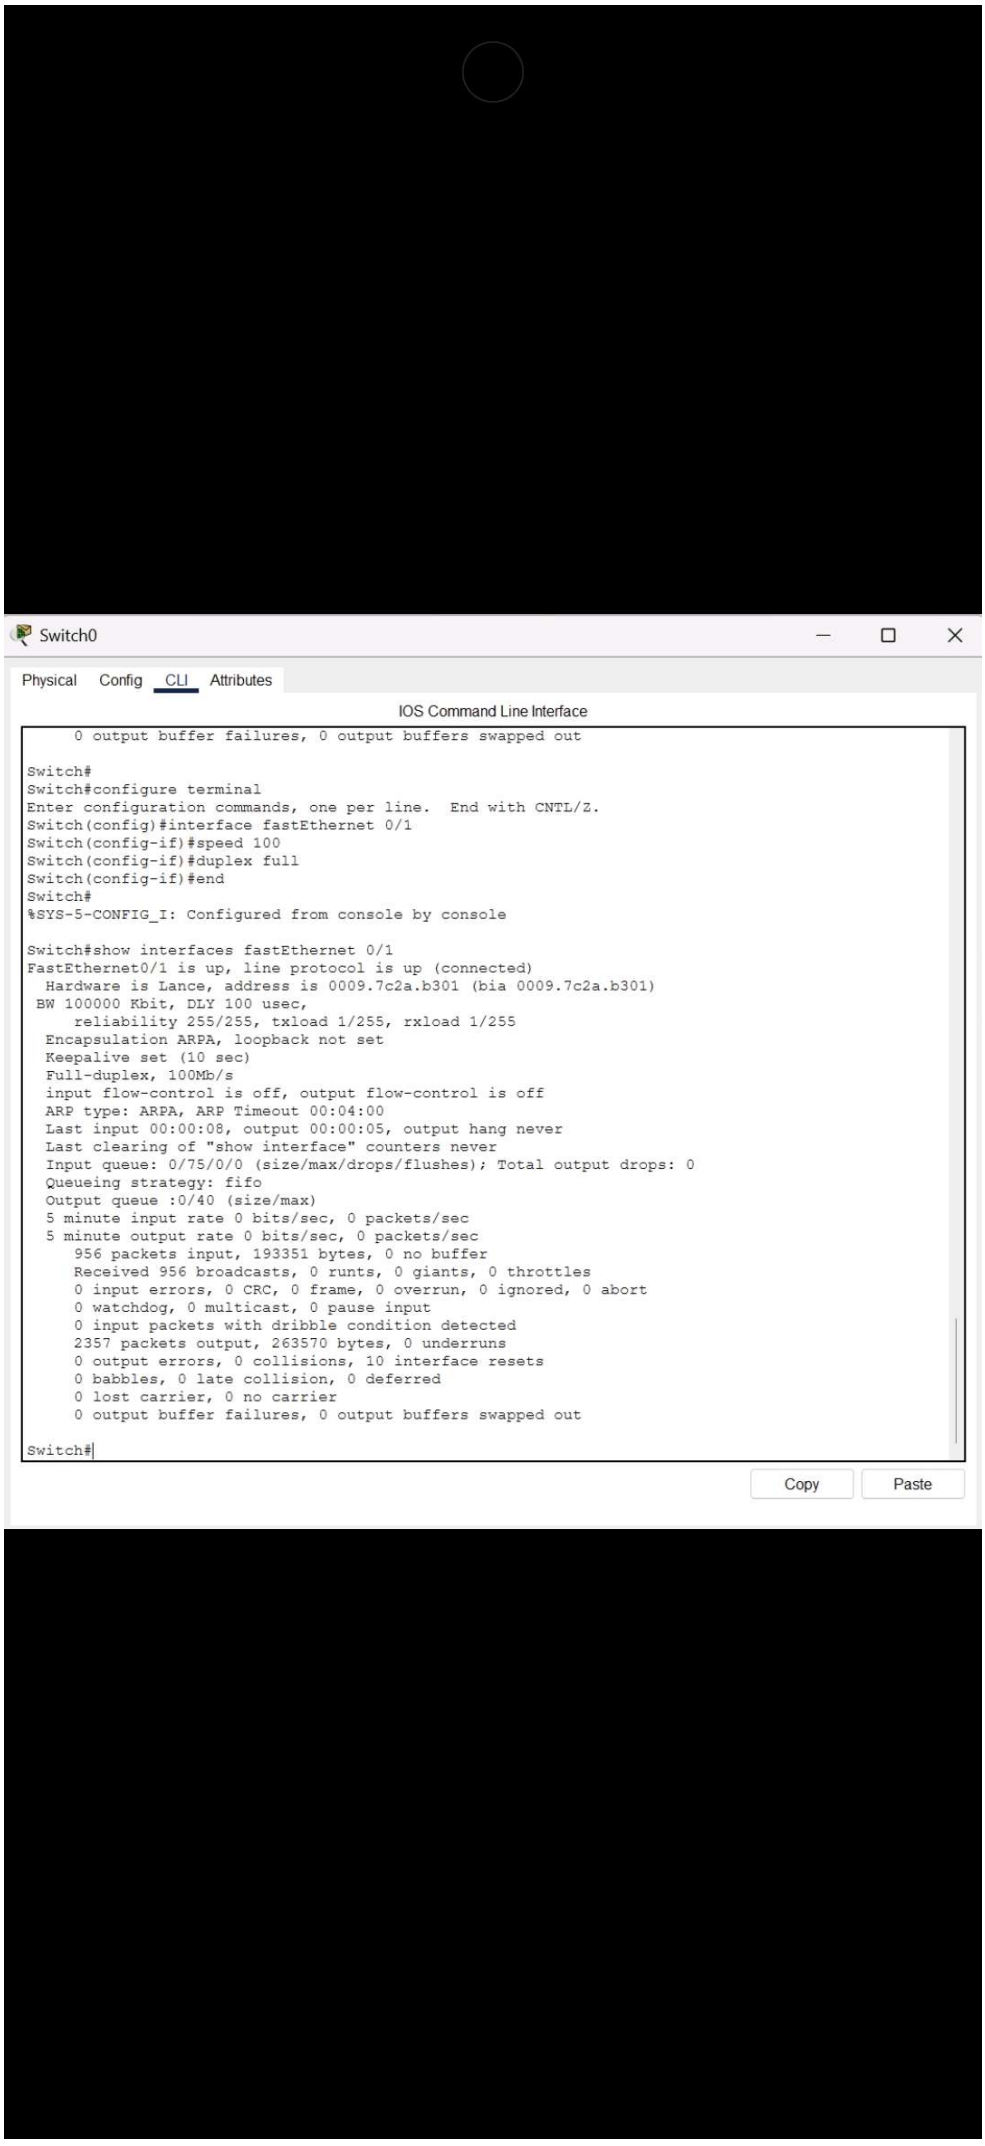


Switch0
Physical
Config
CLI
Attributes
IOS Command Line Interface
0 output buffer failures, 0 output buffers swapped out
Switch#
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface fastEthernet 0/1
Switch(config-if)#speed 100
Switch(config-if)#duplex full
Switch(config-if)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console
Switch#show interfaces fastEthernet 0/1
FastEthernet0/1 is up, line protocol is up (connected)
Hardware is Lance, address is 0009.7c2a.b301 (bia 0009.7c2a.b301)
BW 100000 Kbit, DLY 100 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation ARPA, loopback not set
Keepalive set (10 sec)
Full-duplex, 100Mb/s
input flow-control is off, output flow-control is off
ARP type: ARPA, ARP Timeout 00:04:00
Last input 00:00:08, output 00:00:05, output hang never
Last clearing of "show interface" counters never
Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: fifo
Output queue :0/40 (size/max)
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
956 packets input, 193351 bytes, 0 no buffer
Received 956 broadcasts, 0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
0 watchdog, 0 multicast, 0 pause input
0 input packets with dribble condition detected
2357 packets output, 263570 bytes, 0 underruns
0 output errors, 0 collisions, 10 interface resets
0 babbles, 0 late collision, 0 deferred
0 lost carrier, 0 no carrier
0 output buffer failures, 0 output buffers swapped out
Switch#
Copy
Paste