SPECIFICATIONS:
* Use Concrete of Grade M20
* Use TOR Steel of Grade Fe500
* Provide Cover of 50mm for Foundations.
* Provide Cover of 25mm for Beams 20mm for slabs.
* SBC of soil is taken as 200 kN/m²
* Designed for G+1 Floors only.

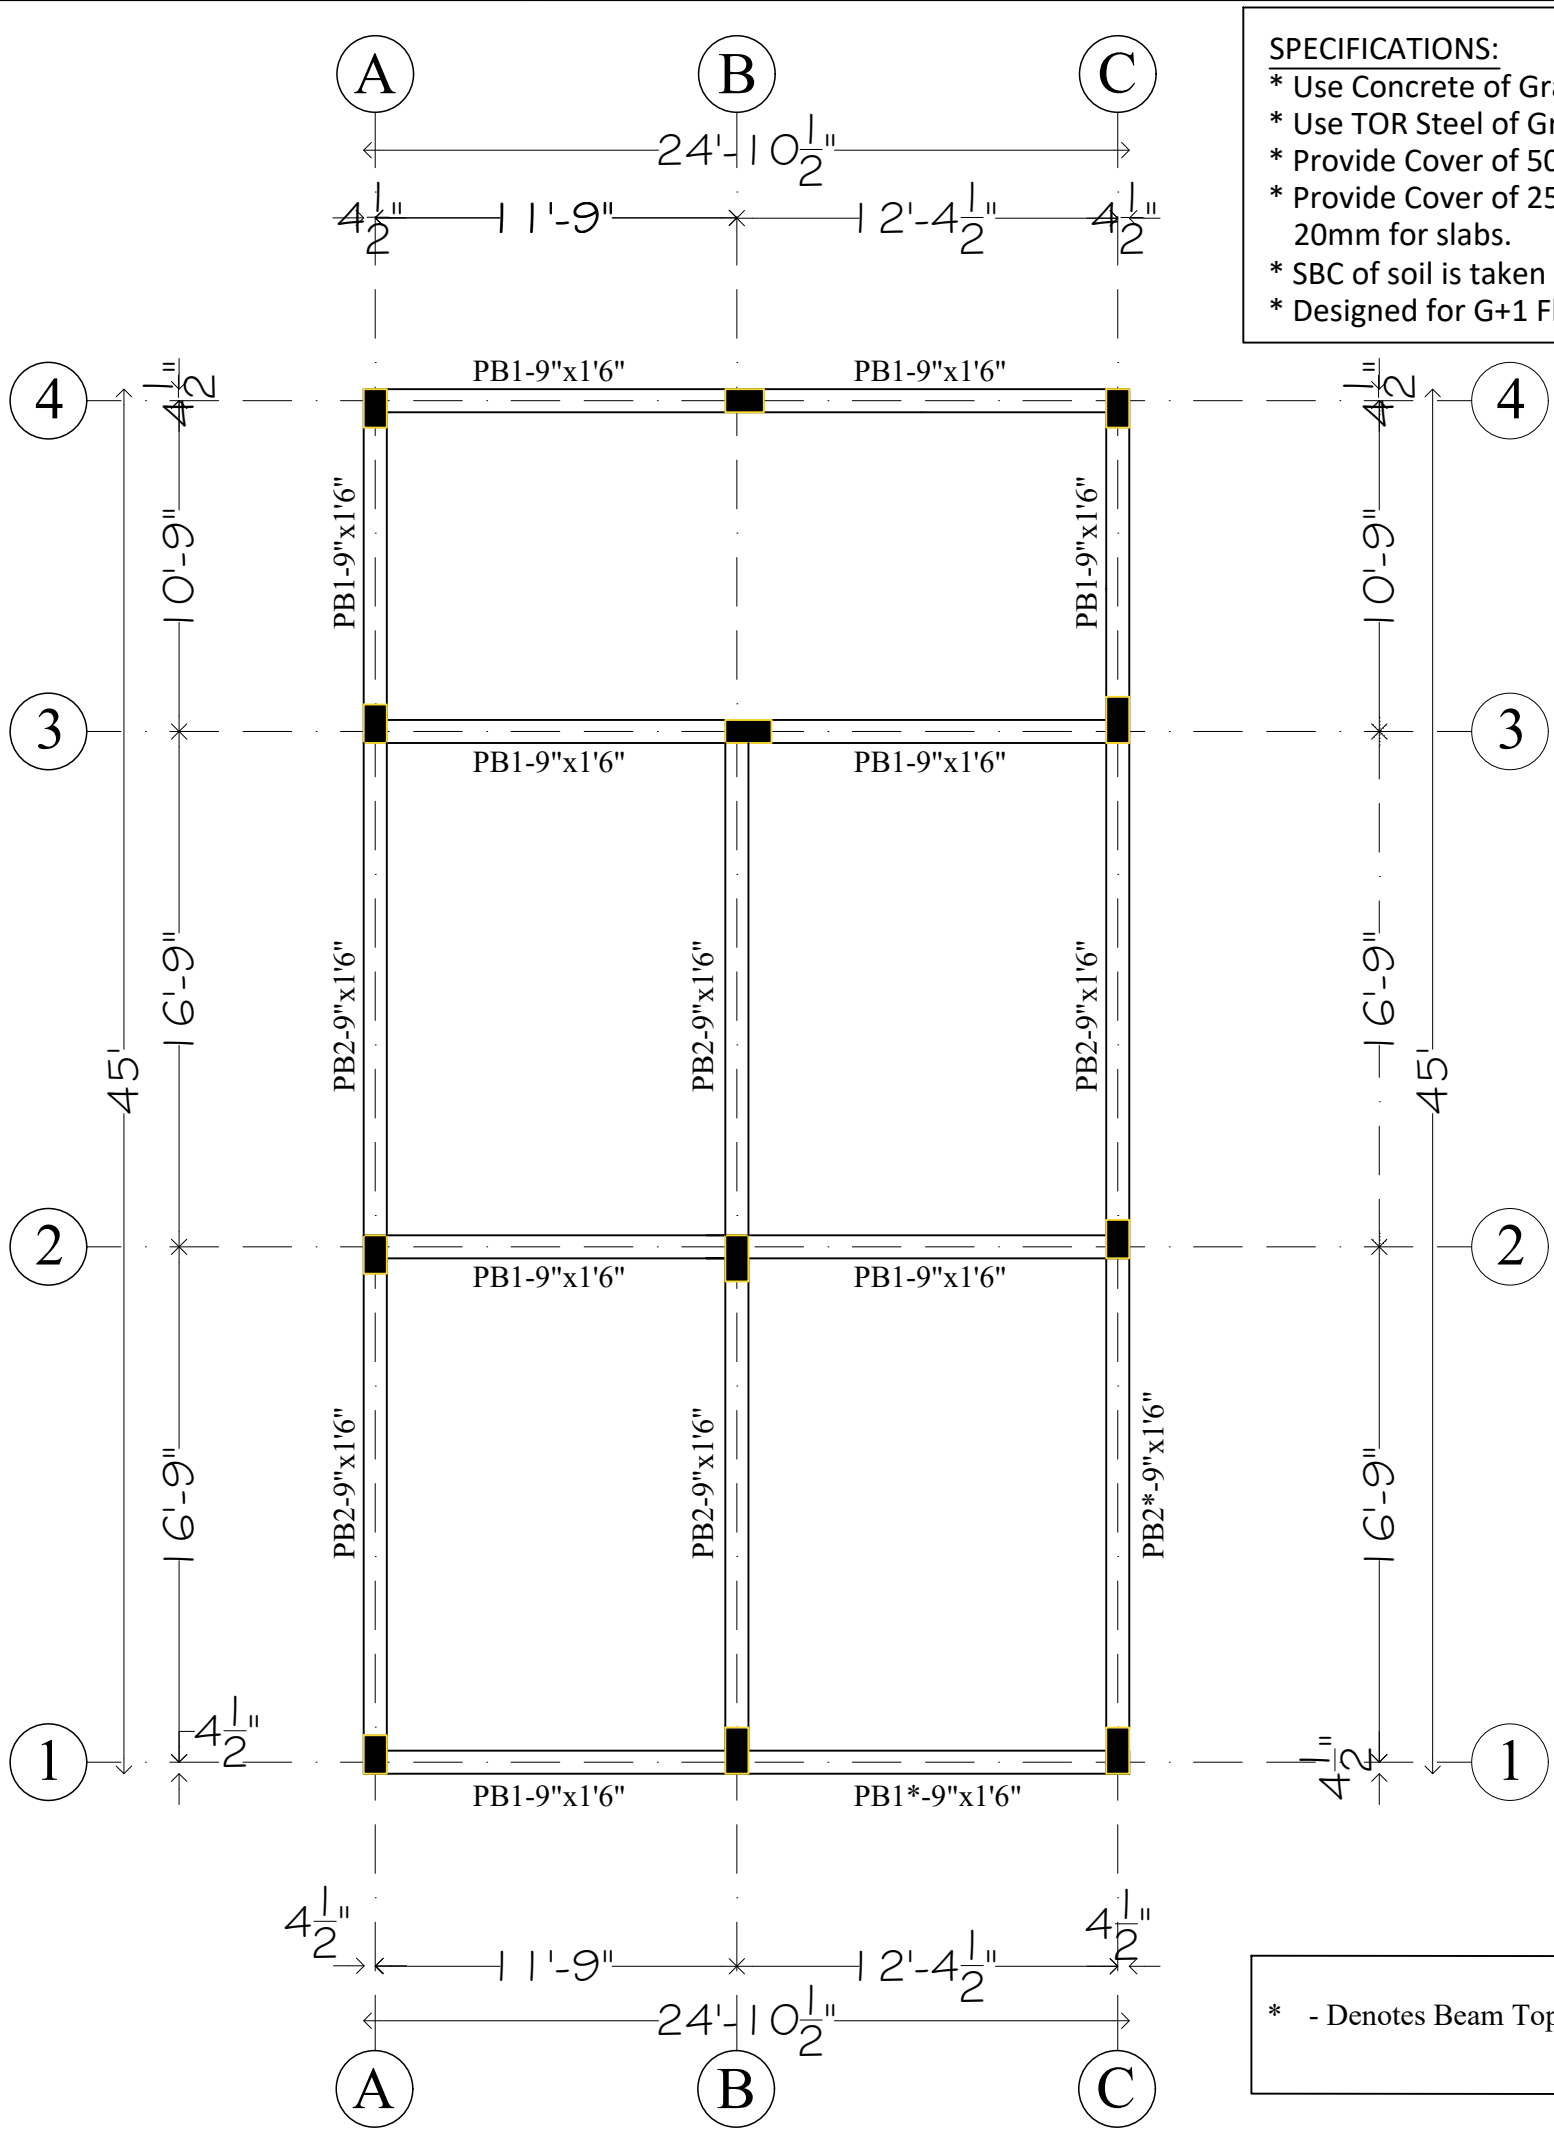

* - Denotes Beam Top Level @ +0.00Lvl

TITLE : STRUCTURAL DRAWING PLINTH BEAM LAYOUT	ORIENTATION	AE: Er.Karthic.M Karur	
PROJECT : RESIDENTIAL NO OF FLOORS : G+1 SITE AREA :1908.00SQ.FT BUILD UP AREA :1187.00SQ.FT OPEN AREA : 721.00SQ.FT	N	CLIENT: Mr.Ajith Amman Nagar Karur	
NOTES:			

REV	DESCRIPTION	BY	DATE
1			
2			
3			

PROJECT NO	DRAWING NO	SCALE	DATE
03	STR-03	NTS	17.11.22
DRAWN	CHECKED	APPVD	REV
VG	MB		00

1.THE COPYRIGHT OF THIS DRAWING IS VESTED IN BUSINESS BENCH AND IT MAY NOT BE REPRODUCED IN WHOLE OR PART OR USED FOR THE MANUFACTURE OF ANY ARTICLE WITHOUT THE EXPRESS PERMISSION OF THE BUSINESS BENCH
2. WORK TO FIGURED DIMENSIONS ONLY.
3.THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT DRAWINGS AND SPECIFICATIONS.

BUSINESS BENCH
CONSTRUCTION & INTERIOR

Business Bench
No.5/301,2nd floor,
Thirukampuliyur, Bypass,
Karur, Tamil Nadu 639002