


Real-LLM Extension Sensitivity

Stand-down ablation and homogeneous boundary conditions

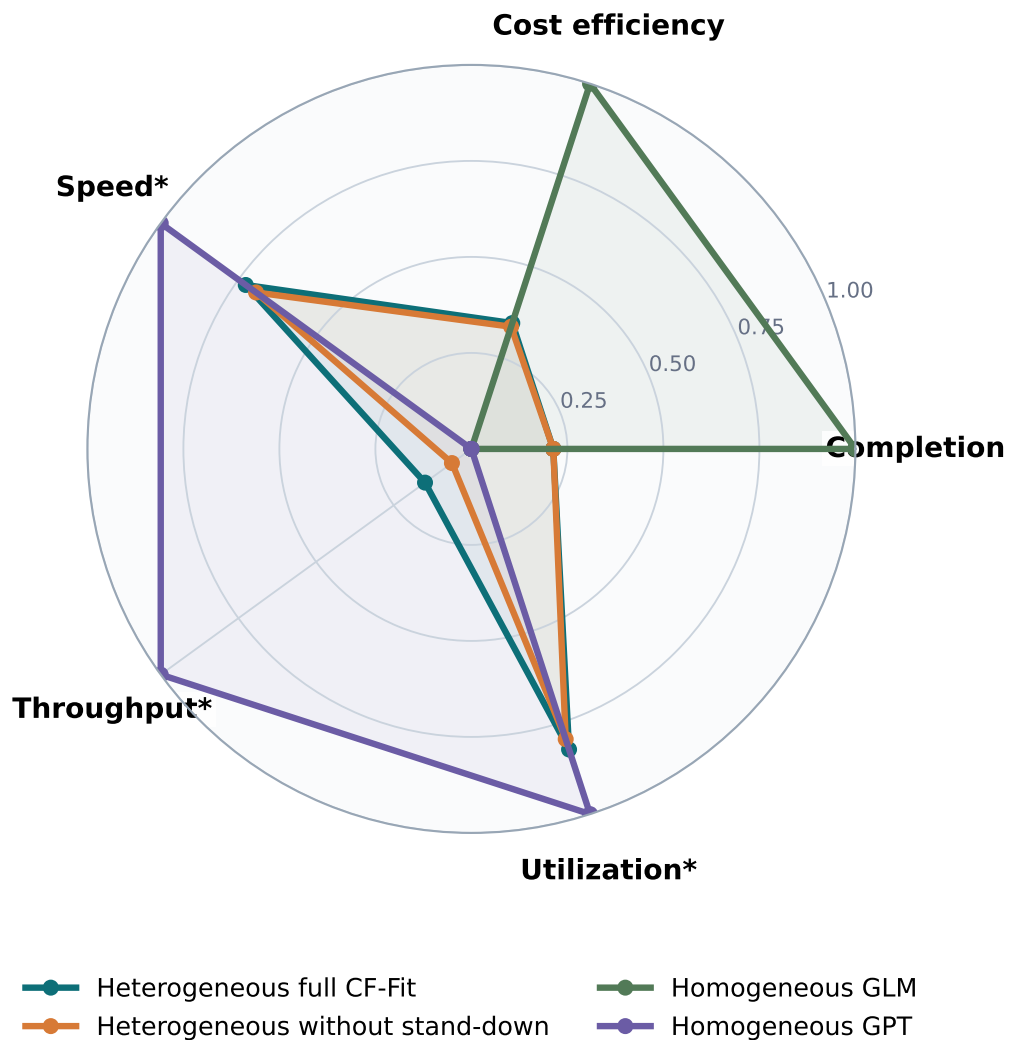

Per-axis min-max normalization; higher is preferable. *Cross-window wall-clock axes are exploratory; timing-valid n differs by condition.