

**Paolo Fiorini**

Jet Propulsion Laboratory  
California Institute of Technology  
Pasadena, California 91109 USA

**Zvi Shiller**

Department of Mechanical, Nuclear, and Aerospace Engineering  
University of California, Los Angeles  
Los Angeles, California 90024 USA

# Motion Planning in Dynamic Environments Using Velocity Obstacles

## Abstract

*This paper presents a method for robot motion planning in dynamic environments. It consists of selecting avoidance maneuvers to avoid static and moving obstacles in the velocity space, based on the current positions and velocities of the robot and obstacles. It is a first-order method, since it does not integrate velocities to yield positions as functions of time.*

*The avoidance maneuvers are generated by selecting robot velocities outside of the velocity obstacles, which represent the set of robot velocities that would result in a collision with a given obstacle that moves at a given velocity, at some future time. To ensure that the avoidance maneuver is dynamically feasible, the set of avoidance velocities is intersected with the set of admissible velocities, defined by the robot's acceleration constraints. Computing new avoidance maneuvers at regular time intervals accounts for general obstacle trajectories.*

*The trajectory from start to goal is computed by searching a tree of feasible avoidance maneuvers, computed at discrete time intervals. An exhaustive search of the tree yields near-optimal trajectories that either minimize distance or motion time. A heuristic search of the tree is applicable to on-line planning. The method is demonstrated for point and disk robots among static and moving obstacles, and for an automated vehicle in an intelligent vehicle highway system scenario.*

## 1. Introduction

This paper addresses the problem of motion planning in dynamic environments, such as robot manipulators avoiding moving obstacles, and intelligent vehicles negotiating free-way traffic.

Motion planning in dynamic environments is a difficult problem, because it requires planning in the state space, i.e., simultaneously solving the *path planning* and the *velocity planning* problems. Path planning is a kinematic problem, involving the computation of a collision-free path from start

to goal, whereas velocity planning is inherently a dynamic problem, requiring the consideration of robot dynamics and actuator constraints. It was shown that dynamic motion planning for a point in the plane, with bounded velocity and arbitrarily many obstacles, is intractable (NP-hard) (Canny and Reif 1987). In addition to the computational difficulty, this problem is not guaranteed to have a solution owing to the uncertain nature of the environment, since a solution computed at time  $t_0$  may be infeasible at a later time (Sanborn and Hendler 1988).

Originally, motion planning in dynamic environments was addressed by adding the time dimension to the robot's configuration space, assuming bounded velocities and known trajectories of the obstacles (Reif and Sharir 1985; Erdmann and Lozano-Pérez 1987; Fujimura and Samet 1989a). Reif and Sharir (1985) solved the planar problem for a polygonal robot among many moving polygonal obstacles, by searching a visibility graph in the configuration-time space. Erdmann and Lozano-Pérez (1987) discretized the configuration-time space to a sequence of slices of the configuration space at successive time intervals. This method essentially solves the static planning problem at every slice, and joins adjacent solutions. Fujimura and Samet (1989a) used a cell decomposition to represent the configuration-time space, and joined empty cells to connect start to goal.

Another approach to dynamic motion planning is to decompose the problem into smaller subproblems: path planning and velocity planning. This method first computes a feasible path among the static obstacles. The velocity along the path is then selected to avoid the moving obstacles (Kant and Zucker 1986; Lee and Lee 1987; Fraichard 1993; Fraichard and Laugier 1993; Fujimura and Samet 1993; Fujimura 1995). Kant and Zucker (1986) selected both path and velocity profiles using a visibility graph approach. Lee and Lee (1987) developed independently a similar approach for two cooperating robots, and compared the effects of delay and velocity reduction on motion time. Fraichard (1993) considered accel-

eration bounds, and used a search in a state-time space  $(s, \hat{s}, t)$  to compute the velocity profile yielding a minimum-time trajectory. Fraichard and Laugier (1993) considered adjacent paths that could be reached from the nominal path when the nominal path becomes blocked by a moving obstacle. Fujimura (1995) considered the case of a robot moving on a fixed time-dependent network, whose nodes could be temporarily occluded by moving obstacles.

A different approach consists of generating the accessibility graph of the environment, which is an extension of the visibility graph (Fujimura and Samet 1989b, 1990). Fujimura and Samet (1989b) defined it as the locus of points on the obstacles that are reachable by the robot moving at maximum speed. These points form the *collision front*, and can be linked together to construct a path from start to goal. The accessibility graph has the property that, if the robot moves faster than the obstacles, the path computed by searching the graph is time-minimal. This concept was extended in Fujimura (1994) to the case of slowly moving robots and transient obstacles, i.e., obstacles that could appear and disappear in the environment.

On-line planning in dynamic environments has mostly emphasized reasoning and decision making, with little concern to robot dynamics. In Sanborn and Hendler (1988), reaction rules were developed for a robot moving in a traffic world. The moving robot reacts to the environment by predicting the space-time intervals in which belligerent and apathetic objects would intersect its specified path. This approach considers the physical properties of the environment, but neglects the physical limitations of the moving robot. Bounds on the robot's velocity were added in Tsubouchi and Arimoto (1994), where a Cartesian-time representation was used to avoid the volumes swept by the moving obstacles. A problem related to on-line avoidance of many obstacles, namely, predicting and ordering future collisions according to time until collision, was addressed in Hayward, Aubry, Foisy, and Ghallab (1995).

Common to the previous work is the reliance on position information to test for collision between the robot and the moving obstacles. For example, the configuration-time space (Erdmann and Lozano-Pérez 1987; Fujimura and Samet 1989a; Reif and Sharir 1994) is essentially a time evolution of the configuration-space obstacles. The path-velocity decomposition (Kant and Zucker 1986; Fujimura and Samet 1989b; Fraichard and Laugier 1993) is based on testing for collisions at various positions along the path. Similarly, the collision front (Fujimura and Samet 1989b, 1990) is generated by integrating velocities to produce colliding positions between the robot and the obstacles. Thus, all current algorithms can be described as *zero-order* methods, since they rely on position information to determine potential collisions.

In this paper, we present a *first-order* method to compute the trajectories of a robot moving in a time-varying environment, using velocity information to directly determine potential collisions. This method utilizes the concept of velocity

obstacle (VO) (Fiorini and Shiller 1993; Fiorini 1995), which maps the dynamic environment into the robot velocity space. The velocity obstacle is a first-order approximation of the robot's velocities that would cause a collision with an obstacle at some future time, within a given time horizon. With this representation, an avoidance maneuver can be computed simply by selecting velocities outside of the velocity obstacle. The maneuver is ensured to be dynamically feasible by selecting velocities that satisfy the actuator constraints, mapped into velocity constraints using forward dynamics.

A trajectory consists of a sequence of such avoidance maneuvers, computed by a global search over a tree of avoidance maneuvers, generated at discrete time intervals. For on-line applications, the tree is pruned using a heuristic search that is designed to achieve a prioritized set of objectives, such as avoiding collisions, reaching the goal, maximizing speed, or achieving trajectories with desired topologies. Both methods were previously implemented in computer simulations for an autonomous vehicle negotiating freeway traffic (Fiorini 1995; Fiorini and Shiller 1995), for a robotic manipulator avoiding moving obstacles (Fiorini and Shiller 1996, 1997), and extended to a 3-D environment (Fiorini and Shiller 1993). The analysis and examples presented in this paper focus on a point robot among static and moving obstacles, and on automated vehicle applications.

This paper is organized as follows. Section 2 presents the velocity obstacle. Section 3 describes the structure of the avoidance maneuvers. The generation of complete trajectories is described in Section 4 using both global and heuristic search methods. Examples of trajectories for a point robot avoiding static and moving obstacles, and for a circular robot navigating highway traffic, are presented in Section 5.

## 2. The Velocity Obstacle

In this section, we present the concept of the *velocity obstacle* (VO) for single and multiple obstacles. For simplicity, we restrict our analysis to circular robots and obstacles, thus considering a planar problem with no rotations. This is not a severe limitation, because general polygons can be represented by a number of circles (O'Rourke and Badler 1979; Featherstone 1990). We also assume that the obstacles move along arbitrary trajectories, and that their instantaneous state (position and velocity) is either known or measurable.

Consider the two circular objects,  $A$  and  $B$ , shown in Figure 1 at time  $t_0$ , with velocities  $\mathbf{v}_A$  and  $\mathbf{v}_B$ . Let circle  $A$  represent the robot, and circle  $B$  represent the obstacle. To compute the VO, we first map  $B$  into the configuration space of  $A$ , by reducing  $A$  to the point  $\hat{A}$  and enlarging  $B$  by the radius of  $A$  to  $\hat{B}$ . The state of each moving object is represented by its position and a velocity vector attached to its center.

We define the *collision cone*,  $CC_{A,B}$ , as the set of colliding relative velocities between  $\hat{A}$  and  $\hat{B}$ :



straight line. We call *imminent* a collision between the robot and an obstacle if it occurs at some time  $t < T_h$ , where  $T_h$  is a suitable time horizon, selected based on system dynamics, obstacle trajectories, and the computation rate of the avoidance maneuvers.

To account for imminent collisions, we modify the set  $VO$  by subtracting from it the set  $VO_h$  defined as:

$$VO_h = \{v_A \mid v_A \in VO, \parallel v_{A,B} \parallel \leq \frac{d_m}{T_h}\}, \quad (5)$$

where  $d_m$  is the shortest relative distance between the robot and the obstacle. The set  $VO_h$  represents velocities that would result in collision, occurring beyond the time horizon.

Figure 5 shows the modified  $VO$ , where the velocity set  $VO_h$  has been removed.

### 3. The Avoidance Maneuver

In this section, we describe the *avoidance maneuver*, consisting of a one-step change in velocity to avoid a future collision

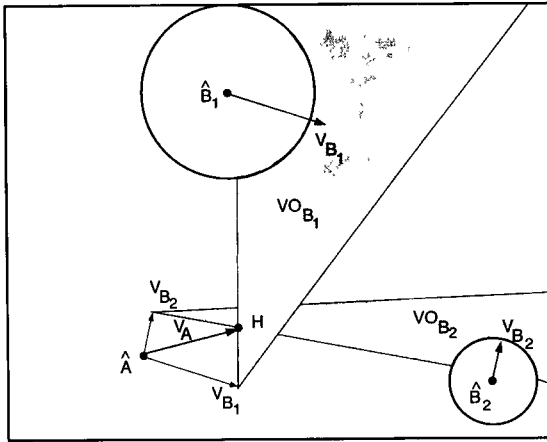


Fig. 4. Velocity obstacles for  $B_1$  and  $B_2$ .

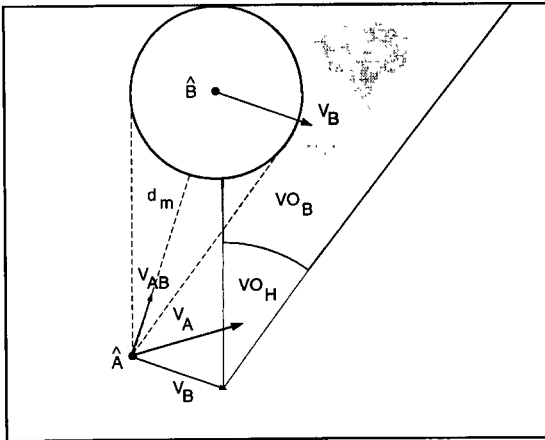


Fig. 5. The velocity obstacle  $VO_B$  for a short time horizon.

within a given time horizon. We start by discussing the set of reachable velocities that account for robot dynamics and actuator constraints.

#### 3.1. The Reachable Avoidance Velocities

The velocities reachable by robot  $A$  at a given state over a given time interval  $\Delta t$  are computed by mapping the actuator constraints to acceleration constraints. The set of *feasible accelerations* at time  $t$ ,  $FA(t)$ , is defined as

$$FA(t) = \{\ddot{x} \mid \ddot{x} = f(\mathbf{x}, \dot{\mathbf{x}}, \mathbf{u}), \mathbf{u} \in U\}, \quad (6)$$

where  $\mathbf{x}$  is the position vector,  $f(\mathbf{x}, \dot{\mathbf{x}}, \mathbf{u})$  represents the robot dynamics,  $\mathbf{u}$  is the vector of the actuator efforts, and  $U$  is the set of admissible controls.

The set of *reachable velocities*,  $RV(t + \Delta t)$ , over the time interval  $\Delta t$ , is thus defined as

$$RV(t + \Delta t) = \{v \mid v = v_A(t) \oplus \Delta t \cdot FA(t)\}. \quad (7)$$

It is computed by scaling  $FA(t)$  by  $\Delta t$  and adding it to the current velocity of  $A$ , as shown schematically in Figure 6.

The set of *reachable avoidance velocities*,  $RAV$ , is defined as the difference between the reachable velocities and the velocity obstacle:

$$RAV(t + \Delta t) = RV(t + \Delta t) \ominus VO(t), \quad (8)$$

where  $\ominus$  denotes the operation of set difference. A maneuver-avoiding obstacle  $B$  can then be computed by selecting any velocity in  $RAV$ . Figure 7 shows schematically the set  $RAV$  consisting of two disjoint closed subsets. For multiple obstacles, the  $RAV$  may consist of multiple disjoint subsets.

It is important to note that the reachable set of eq. (7) accounts only for constraints on the robot accelerations, which we call *dynamic* constraints. In the context of mobile robots, nonholonomic kinematic constraints, which prevent the vehicle from moving sideways, must also be considered. However, the nonholonomic constraints are relevant only at low speeds, such as during parking, since at high speeds the dynamic constraints are generally more restrictive, as shown

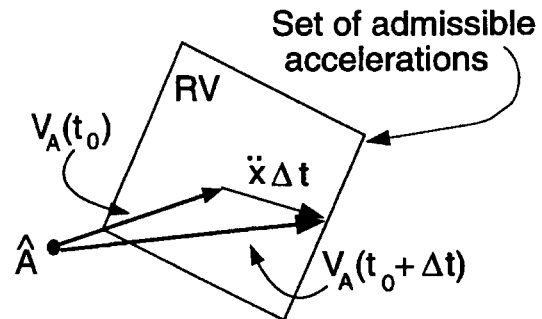


Fig. 6. The feasible accelerations.

schematically in Figure 8. In other words, the bounded accelerations prevent the vehicle from moving sideways at nonzero forward speeds, thus automatically satisfying the nonholonomic constraints (Shiller and Sundar 1996). For this reason, we will disregard the nonholonomic kinematic constraints in computing the feasible avoidance maneuvers.

### 3.2. Structure of the Avoidance Maneuvers

Avoidance maneuvers can be classified according to their position with respect to the moving obstacle. In general, the avoidance velocities form two disjoint sets separated by the set of colliding velocities, as shown in Figure 7. The boundary between colliding and noncolliding velocities consists of the velocities lying on the two lines  $\lambda_f$  and  $\lambda_r$ , generating a maneuver tangent to  $\hat{B}$  at some point  $P \in \partial B$ . To choose the structure of an avoidance maneuver, it is then necessary to determine on which side of the obstacle each maneuver will pass.

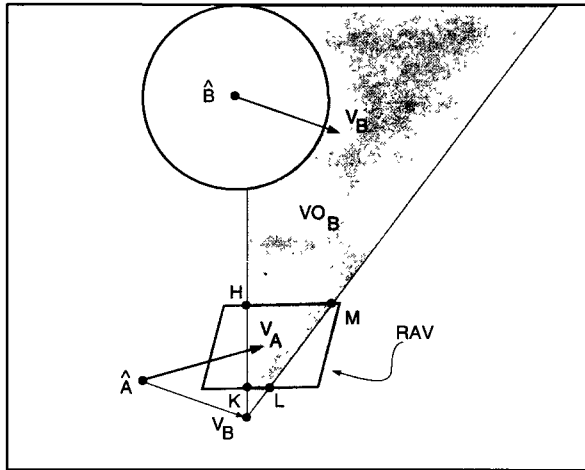


Fig. 7. The reachable avoidance velocities RAV.

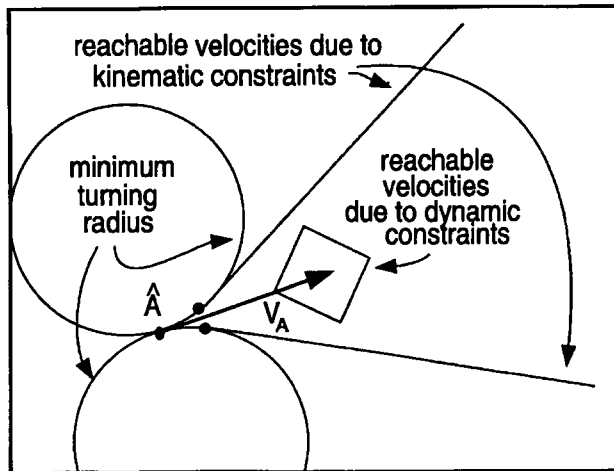


Fig. 8. Dynamic versus kinematic constraints.

We identify the front and rear sides of  $\hat{B}$  by attaching a coordinate frame  $(X, Y)$  to the center of  $\hat{B}$ , oriented with its  $X$ -axis coinciding with the velocity  $v_B$ . The  $Y$ -axis then partitions the boundary of  $\hat{B}$ ,  $\partial B$ , at points  $Y_f$  and  $Y_r$  into the *front* semicircle,  $\partial B_f$ , which intersects the positive  $X$ -axis, and the *rear* semicircle,  $\partial B_r$ , as shown in Figure 9.

The following lemma states that tangent maneuvers can be generated only by relative velocities lying on  $\lambda_f$  and  $\lambda_r$ , and that the actual tangency points of these maneuvers are different from the tangency points  $T_f$  and  $T_r$  of  $\lambda_f$  and  $\lambda_r$ , since they depend on the *absolute* velocities of  $A$  and  $B$ . Assuming no rotations, Figure 10 shows schematically the position of the tangency point  $P$  at time  $t_0$ , when the avoidance maneuver is computed, and at time  $t_1$ , when  $\hat{A}$  reaches  $\hat{B}$ .

**LEMMA 1.** Robot  $A$  is tangent to obstacle  $B$  at some point  $P \in \partial B$  if and only if it follows a trajectory generated by  $v_A$  corresponding to  $v_{A,B} \in \{\lambda_f, \lambda_r\}$ . The tangency sets in  $\partial B$  consist of the shortest segment connecting  $T_f = \lambda_f \cap \partial B$  to  $Y_f$ , and the shortest segment connecting  $T_r = \lambda_r \cap \partial B$  to  $Y_r$ .

This lemma is proved in Appendix A.

As discussed earlier, the boundary of the velocity obstacle  $VO$ ,  $\{\delta_f, \delta_r\}$ , represents all absolute velocities generating trajectories tangent to  $\hat{B}$ , since their corresponding relative velocities lie on  $\lambda_f$  and  $\lambda_r$ . For example, the only tangent velocities in Figure 7 are represented by the segments  $KH$  and  $LM$  of the reachable avoidance velocity set RAV.

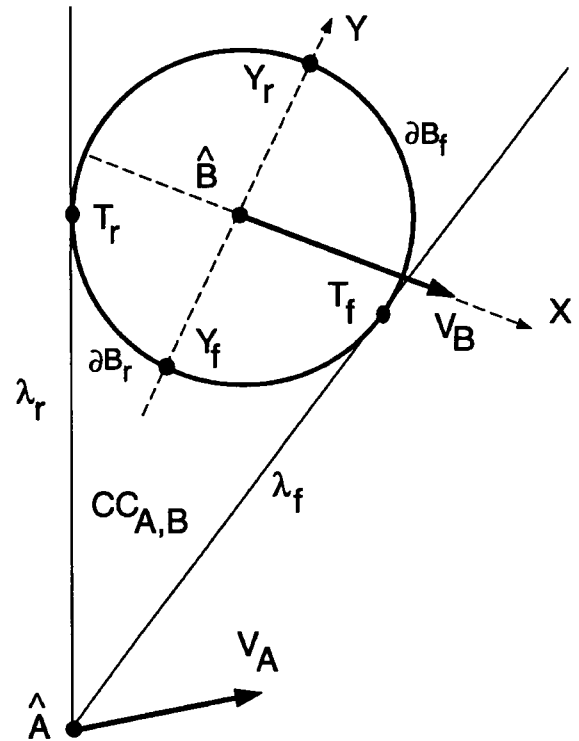


Fig. 9. Grazing arcs in an avoidance maneuver.

Since the tangent velocities are uniquely determined by  $\lambda_f$  and  $\lambda_r$ , we use them to label the subsets in RAV containing velocities that generate a single type of avoidance maneuver. The set RAV in Figure 11 is subdivided into the three subsets  $S_f$ ,  $S_r$ , and  $S_d$  by the boundary of  $VO$  and by the straight line passing through  $\hat{A}$  and the apex of  $VO_B$ . Each of these subsets corresponds to *rear*, *front*, or *diverging* avoidance maneuvers, respectively, as stated in the following lemma. A diverging maneuver is one that takes the robot  $A$  away from the obstacle  $B$ .

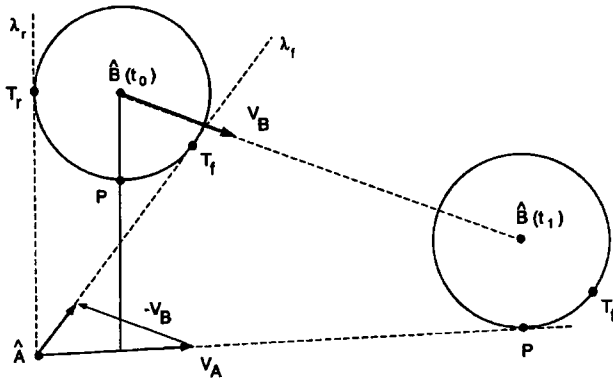


Fig. 10. Trajectory tangent to  $B$ .

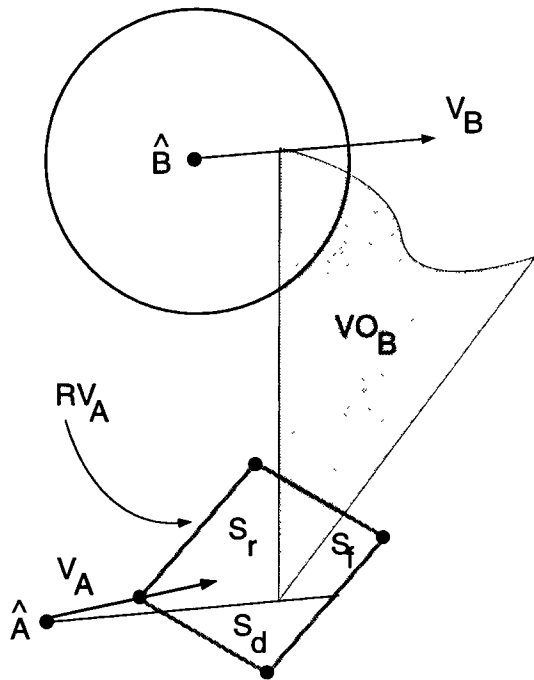


Fig. 11. General structure of the reachable avoidance velocities.

LEMMA 2. The reachable avoidance velocities RAV owing to a single obstacle consists of at most three nonoverlapping subsets  $S_f$ ,  $S_r$ , and  $S_d$ , each representing velocities corresponding to front, rear, or diverging maneuvers, respectively.

The proof of this lemma is given in Appendix A.

The RAV set due to one obstacle may consist of at most three subsets. Clearly, there can be cases where RAV consists of fewer sets, one, two, or none, as shown in Figure 7. For the case of multiple obstacles, we represent each RAV set by  $S_s$ , where  $s$  is an ordered string of characters ( $f$ ,  $r$ ,  $d$ ) representing the type of avoidance of each obstacle. For example, the set  $S_{ff}$  shown in Figure 12 includes velocity generating maneuvers that avoid both obstacles  $B_1$  and  $B_2$  with a front maneuver. The set  $S_{fr}$  corresponds to the front avoidance of  $B_1$  and rear avoidance of  $B_2$ , respectively.

The properties of the RAV generated by multiple obstacles are summarized in the following theorem, whose proof is given in Appendix A.

THEOREM 1. Given a robot  $A$  and  $m$  moving obstacles  $B_j$  ( $j = 1, \dots, m$ ), the reachable avoidance set RAV consists of at most  $3m$  subsets, each including velocities corresponding to a unique type of avoidance maneuver.

The theorem states that it is possible to subdivide the avoidance velocities RAV into subsets, each corresponding to a specific avoidance maneuver of an obstacle. For example, this knowledge about maneuver types can be used by an intelligent vehicle in avoiding a potentially dangerous obstacle: a car avoiding a big truck may choose a rear avoidance maneuver, even though a front maneuver might also be feasible, for the sake of safety. A procedure for computing the sets of avoidance velocities is described in Appendix B.

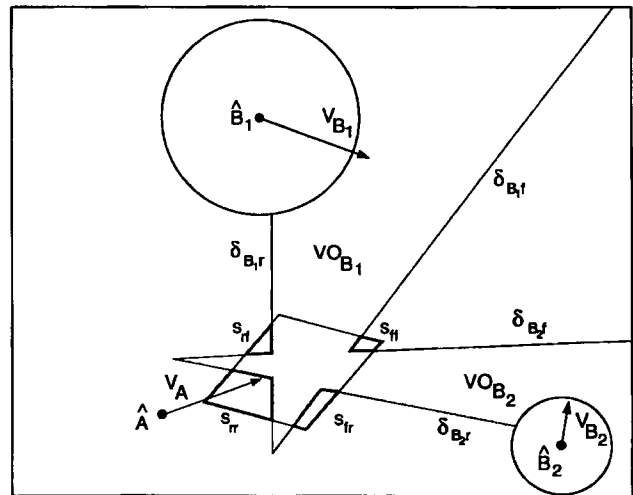


Fig. 12. Classification of the reachable avoidance velocities.

## 4. Computing the Avoidance Trajectories

This section presents a method for computing trajectories that avoids static and moving obstacles, reaches the goal, and satisfies the robot's dynamic constraints. A trajectory consists of a sequence of avoidance maneuvers, selected by searching over a tree of feasible maneuvers computed at discrete time intervals. We propose a global search for off-line applications, and a heuristic search for on-line applications.

### 4.1. Global Search

The tree of avoidance maneuvers is generated by computing the reachable avoidance set RAV at discrete time intervals. The *nodes* on the tree correspond to the positions of the robot at times  $t_i$ , and the *branches* correspond to the avoidance maneuvers at those positions. The *operators* expanding each node into its successors at time  $t_{i+1} = t_i + T$  (i.e., generating the avoidance maneuvers) are the velocities computed by discretizing RAV. The search tree is formally defined as follows:

$$n_j(t_i) = \{x_j, \text{RAV}(t_i)\}, \quad (9)$$

$$o_{j,l}(t_i) = \{v_l(t_i) \mid v_l(t_i) \in \text{RAV}_j(t_i)\}, \text{ and} \quad (10)$$

$$e_{j,k}(t_i) = \{(n_j(t_i), n_k(t_{i+1})) \mid n_k(t_{i+1}) = n_j(t_i) + (o_{j,l} T)\}, \quad (11)$$

where  $n_j$  is the  $j$ th node at time  $t_i$ ;  $\text{RAV}_j(t_i)$  is the reachable velocity set computed for node  $n_j$ ;  $o_{j,l}$  is the  $l$ th operator on node  $j$  at time  $t_i$ ; and  $e_{j,k}$  is the branch between node  $n_j$  at time  $t_i$  and node  $n_k$  at time  $t_{i+1}$ .

To keep the computation manageable, each avoidance set  $\text{RAV}(t_i)$  is discretized by a grid. The positions reached by the robot at the end of each maneuver are the successors of node  $n_j(t_i)$ . A node  $n_j(t_i)$  is completely expanded when all the operators  $o_{j,l} \in \text{RAV}_j$  have been applied. The resulting tree has a constant time interval between nodes, and a variable branch number that depends on the shape of each RAV. By assigning an appropriate cost to each branch, this tree can be searched for the trajectory that maximizes some objective function, such as distance traveled, motion time, or energy, using standard search techniques (Nilsson 1980; Pearl 1985). Figure 13 shows schematically a subtree of a few avoidance maneuvers.

Since the avoidance maneuvers are generated using the velocities in RAV, each segment of the trajectory avoids all the obstacles that are reachable within the specified time horizon. This excludes trajectories that might, on some segment, be on a collision course with some of those obstacles, and that would avoid them on a later segment. Therefore, this method generates only conservative trajectories. Trajectories excluded from the computation can be generated by considering a shorter time horizon or by computing the time-minimal trajectories (Fiorini 1995).

### 4.2. Heuristic Search

For on-line applications, the trajectory can be generated incrementally by expanding only the node corresponding to the current robot position, and generating only one branch per node, using some heuristics to choose among all possible branches.

The heuristics can be designed to satisfy a prioritized series of goals, such as survival of the robot as the first goal; and reaching the desired target, minimizing some performance index, and selecting a desired trajectory structure, as the secondary goals. Choosing velocities in RAV (if they exist) automatically guarantees survival. Among those velocities, selecting the ones along the straight line to the goal would ensure reaching the goal. Selecting the highest feasible velocity in the general direction of the goal may reduce motion time. Selecting the velocity from the appropriate subset of RAV can ensure a desired trajectory structure (front or rear maneuvers). It is important to note that there is no guarantee that any objective is achievable at any time. The purpose of the heuristic search is to find a "good" local solution if one exists.

We have experimented with the following basic heuristics:

1. Choose the highest avoidance velocity along the line to the goal, as shown in Figure 14a, so that the trajectory takes the robot toward its target. This strategy is denoted in the following by TG (to goal).
2. Select the maximum avoidance velocity within some specified angle  $\alpha$  from the line to the goal, as shown in Figure 14b, so that the robot moves at high speed, even

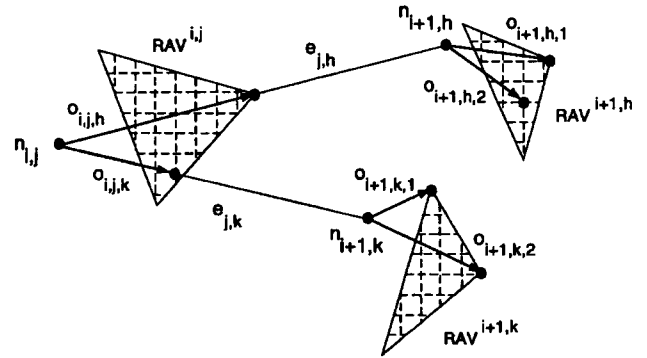


Fig. 13. Tree representation for the global search.

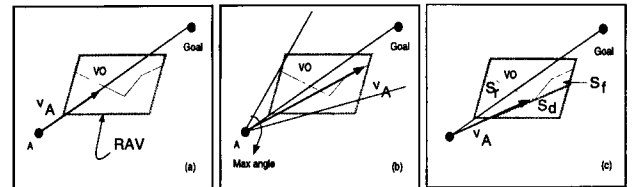


Fig. 14. (a) The TG (to goal) strategy; (b) the MV (maximum velocity) strategy; and (c) the ST (structure) strategy.

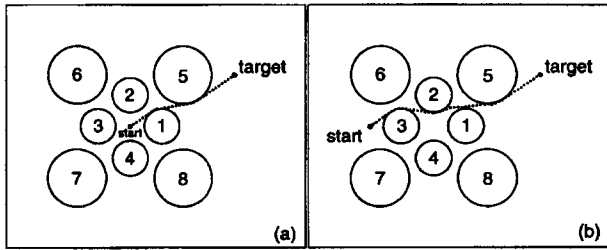


Fig. 15. Trajectories avoiding static obstacles.

if it does not aim directly at the goal. This strategy is henceforth called MV (maximum velocity).

3. Select the velocity that avoids the obstacles according to their perceived risk. This strategy is called ST (structure). In Figure 14c, the chosen velocity is the highest among the rear avoidance velocities.

Other heuristics may combine some or all of the above strategies. For example, the avoidance velocity could be chosen as the fastest velocity pointing toward the target and generating a rear avoidance maneuver. It might be advantageous to switch between heuristics to yield trajectories that better satisfy the prioritized goals. Examples of trajectories generated by these heuristics are presented in the following section.

#### 4.3. Avoidance of Static Obstacles

The first two examples demonstrate the applicability of this approach to static environments. Here, a point robot avoids eight circular obstacles, arranged as shown in Figure 15, starting from rest from two different points. The trajectories shown in Figure 15 were computed every 1 sec using the MV heuristics, and time horizon  $T_h = 10$  sec. The trajectory in Figure 15a first follows the boundary of the velocity obstacle of obstacle 1, then switches to obstacle 5. Similarly, the trajectory in Figure 15b switches from obstacle 3 to 2, and finally to 5. In this case, obstacle 1 was not obstructing the target after avoiding obstacle 2. In both cases, setting the time horizon higher, to  $T_h = 20$  sec, resulted in no solution, since the reachable avoidance velocities RAV at the the initial positions were completely covered by the VO of the static obstacles.

#### 4.4. Avoidance of Fixed and Moving Obstacles

This example demonstrates avoidance of static and moving obstacles that move along circular trajectories. The robot starts from rest at the center, as shown in Figure 16a, first avoiding the small static obstacles, and then avoiding the large moving obstacles, using the MV heuristics. The trajectory is shown in three snapshots in Figures 16b, 16c, and 16d, corresponding to times  $t = 24$  sec,  $t = 29$  sec, and the final time  $t = 37.6$  sec, respectively. After avoiding obstacle 1, the

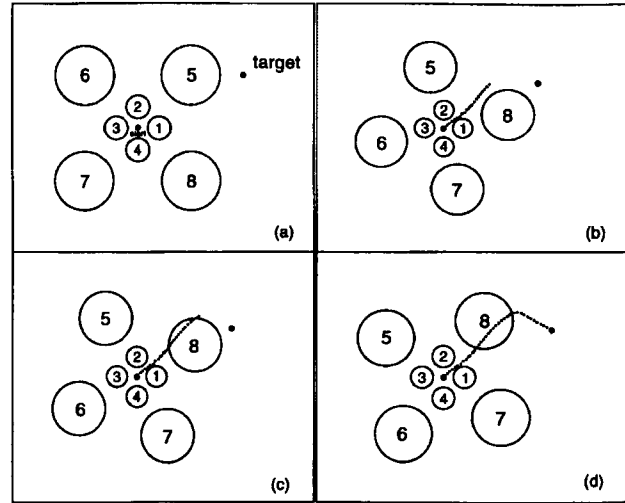


Fig. 16. Snapshots of the trajectory avoiding static and moving obstacles.

robot moves to avoid the incoming obstacle 8. It aims at being tangent to obstacle 8, which explains the initial distance from the obstacle in Figure 16b. The robot is eventually tangent to obstacle 8, as shown in Figure 16c. From that point on, the robot continues toward the target, as shown in Figure 16d.

Here the robot slows down while approaching obstacle 8, as represented by the short distance between the circles in Figure 16b. This occurred owing to the linear approximation of the obstacle's trajectory, which at those points made rear avoidance the only feasible maneuver. Later, because of the change in direction of the obstacle, the front avoidance maneuver became feasible, which explains the higher speeds at the distal end of the trajectory shown in Figure 16b.

#### 4.5. Intelligent Highway Examples

The following examples demonstrate the proposed approach for intelligent vehicles negotiating highway traffic.

##### 4.5.1. Moving to the Exit Ramp

This example consists of a robotic vehicle in the leftmost lane, attempting to reach the exit ramp on the right, while avoiding the other two vehicles that move at constant speeds. The initial velocity of the robot and of vehicle 2 is  $(v_x = 30.0 \text{ m/sec}; v_y = 0.0 \text{ m/sec})$ , and the initial velocity of vehicle 1 is  $(v_x = 23 \text{ m/sec}; v_y = 0.0 \text{ m/sec})$ . The initial velocities are represented by vectors attached to the center of each vehicle. The gray circles represent positions of the robot and of the obstacles when they cross each other's path.

First, we computed the time-optimal trajectory using a global search, as discussed in Section 4.1. The nodes of the tree were generated at 1-sec intervals. The RAV sets were discretized on average by 12 points, and the tree was expanded to a depth of 5 levels.



Using the depth-first iterative deepening algorithm (Korf 1985) resulted in the trajectory shown in Figure 17, with the motion time of 3.5 sec.

Using the TG heuristic resulted in the trajectory shown in Figure 18. Along this trajectory, the robot slows down and lets vehicle 2 pass, and then speeds up toward the exit, behind vehicle 1. The total motion time for this trajectory is 6.07 sec.

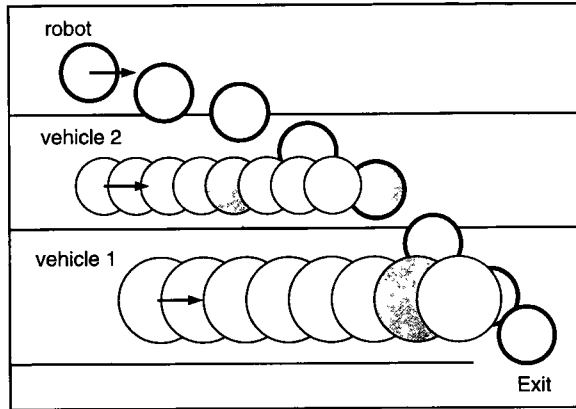


Fig. 17. Trajectory computed by global search.

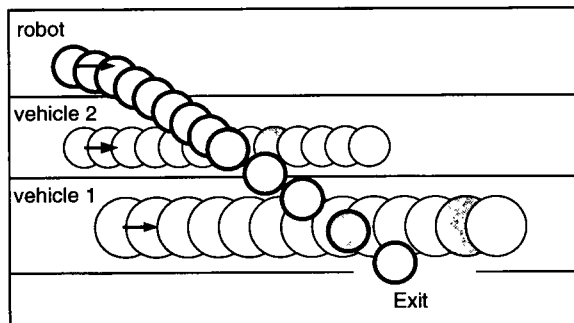


Fig. 18. Trajectory computed with the TG (to goal) strategy.

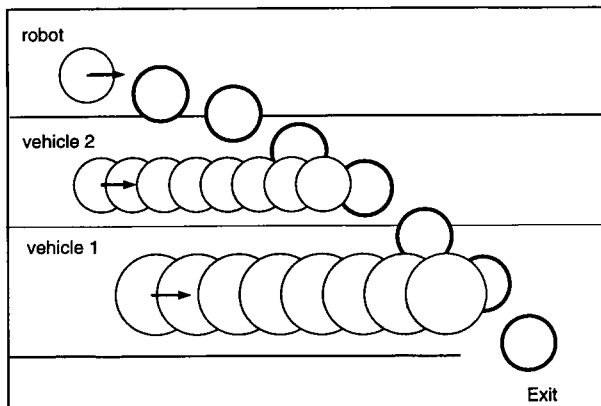


Fig. 19. Trajectory computed with MV (maximum velocity) strategy.

Using the MV heuristics produced the trajectory shown in Figure 19. Here, the robot speeds up and passes in front of both vehicles 1 and 2. The total motion time along this trajectory is 3.56 sec. It compares favorably with the time of 3.5 sec computed by the global search.

Using both MV and TG strategies resulted in the trajectory shown in Figure 20. Here, the robot first speeds up to pass vehicle 2, then slows down to let vehicle 1 pass, and then speeds up again toward the goal. The motion time for this trajectory is 5.31 sec. This trajectory was computed using the MV heuristics for  $0 \leq t \leq 2.0$  sec and the TG heuristics afterward.

#### 4.5.2. Negotiating Highway Traffic

This example considers a "speeding" robot. First, the vehicles are represented by small circles, simulating motorcycles. Using the MV heuristic resulted in the trajectory shown in Figure 21. Here, the robot passes vehicle 1 without making a complete lane change, and thus is not affected by the presence of vehicles 2 and 5.

Considering larger vehicles, and keeping the initial velocities the same as before, resulted in the trajectory shown in Figure 22. Blocked by vehicle 2 from the left and vehicle 3 from the right, the robot first slows down to attempt a lane change to the left in order to pass vehicle 1. But then a higher velocity to the right becomes feasible, and the robot speeds up in front of vehicle 3, passes vehicle 1 on the right, and returns to the center lane.

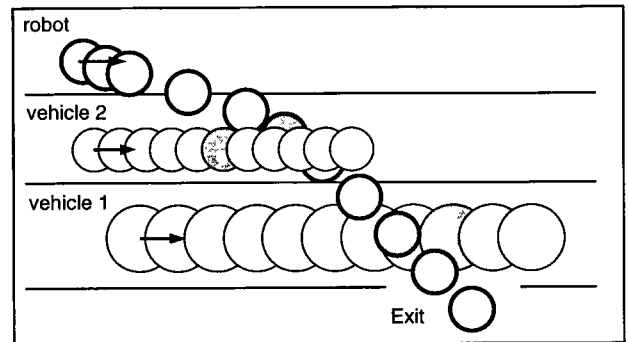


Fig. 20. Trajectory computed with both TG and MV strategies.

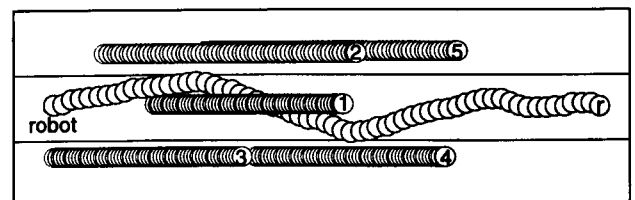


Fig. 21. Trajectory computed for a motorcycle.

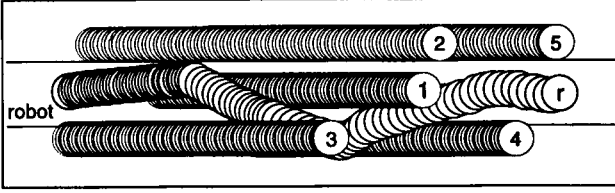


Fig. 22. Trajectory computed for a car.

## 5. Conclusions

A method for planning the motion of a robot in dynamic environments has been presented. It is a first-order method, since it relies on velocity information for planning an avoidance maneuver. Planning in the velocity space makes it possible to consider robot dynamics and actuator constraints. In contrast, most current planners are zero order, generating avoidance maneuvers based on position information, and most do not consider robot dynamics.

Key features of this approach are: (1) it provides a simple geometric representation of potential avoidance maneuvers; (2) any number of moving obstacles can be avoided by considering the union of their VOs; (3) it unifies the avoidance of moving as well as stationary obstacles; and (4) it allows for the simple consideration of robot dynamics and actuator constraints.

The avoidance maneuvers are generated using a representation of the obstacles in the velocity space, which we call the velocity obstacle. It represents the colliding velocities of the robot with a given obstacle that moves at a given velocity. General trajectories are approximated by a sequence of piecewise constant segments. Robot dynamics are considered by restricting the set of potential avoidance velocities to those reachable by the set of admissible accelerations over a given time interval.

This approach was demonstrated numerically in several examples showing the applicability of the proposed approach to the avoidance of static and moving obstacles, and to obstacles moving along straight and curved trajectories. Also demonstrated was the potential use of this method to effectively negotiate highway traffic.

## Appendix A. Lemma and Theorem Proofs

### Lemma 1 Proof

The proof is carried out for  $\hat{B}$  since there is a one-to-one correspondence between  $\hat{B}$  and  $B$ . Furthermore, only the front side of  $\hat{B}$ ,  $\partial B_f$ , is analyzed, since the rear side,  $\partial B_r$ , is completely analogous. First, the necessary and sufficient conditions of the lemma are proven by contradiction. Then a

geometric construction is used to define the map between the tangent velocities and the corresponding points on  $\partial B_f$ .

To prove the necessary condition, let us assume that there exists a velocity  $\mathbf{v}_A$  tangent to obstacle  $\hat{B}$  such that its corresponding relative velocity,  $\mathbf{v}_{A,B}$  is not on the boundary of the collision cone  $CC_{A,B}$ , or:

$$\exists \mathbf{v}_A \text{ tangent to } \hat{B} \mid \mathbf{v}_{A,B} = (\mathbf{v}_A - \mathbf{v}_B) \notin \lambda_f.$$

Then  $\mathbf{v}_{A,B}$  would be either inside or outside  $CC_{A,B}$ . In the first case, by definition of  $CC_{A,B}$ , it would correspond to a collision maneuver, whereas in the second case, it would correspond to an avoidance maneuver, thus contradicting the hypothesis that  $\mathbf{v}_A$  is tangent to  $\hat{B}$ .

The sufficient condition can be proved similarly, assuming that there exists a relative velocity  $\mathbf{v}_{A,B}$  on the boundary of the collision cone  $CC_{A,B}$ , that does not generate a maneuver tangent to  $\hat{B}$ , or

$$\exists \mathbf{v}_{A,B} \in \lambda_f \text{ such that } \mathbf{v}_A = (\mathbf{v}_{A,B} + \mathbf{v}_B) \text{ not tangent to } \hat{B}.$$

Then,  $\mathbf{v}_A$  would be either colliding or avoiding, and thus it will be either inside or outside the velocity obstacle  $VO$ . This would contradict the definition of  $VO$ , which is computed by translating the collision cone  $CC_{A,B}$  by the velocity of  $B$ ,  $\mathbf{v}_B$ . In particular, all velocities on  $\lambda_f$  become velocities with the tip on  $\delta_f$ .

We prove the second part of the lemma by construction, computing the tangency points that correspond to each tangent velocity  $\mathbf{v}_{A,B} \in \lambda_f$ . The tangent relative velocities are represented by the semi-infinite line  $\{\hat{A}, \lambda_f\}$ , with minimum and maximum relative velocities given by  $|\mathbf{v}_{A,B}| \rightarrow 0$ , and  $|\mathbf{v}_{A,B}| \rightarrow \infty$ , respectively. The former velocity corresponds to the limit point  $Y_f$ , when  $A$  and  $B$  move on parallel trajectories. The latter velocity corresponds to the limit point  $T_f$ .

The correspondence between any other velocity  $0 < \mathbf{v}_{A,B} < \infty$  and a tangency point  $P \in (T_f, Y_f)$  is established by using the orthogonality between a tangent trajectory  $t$ , owing to  $\mathbf{v}_A = (\mathbf{v}_{A,B} + \mathbf{v}_B)$ , and the line  $l$  through the center of  $\hat{B}$  and the tangency point. The right angle between  $t$  and  $l$  can be embedded into the circle  $C$  of diameter  $(\hat{A}, \hat{B})$ , as shown in Figure 23. Thus, given a desired tangency point  $P \in \partial B_f$ , circle  $C$  maps it into the direction of the corresponding tangency trajectory  $t$ , represented by the line through  $\hat{A}$  and  $Q$ , as shown in Figure 23. Similarly, given a desired tangency direction  $t$ , circle  $C$  maps it into point  $P$ , represented by the intersection of  $\partial B_f$  with the line through the center of  $\hat{B}$  and  $Q$ .

The magnitude of the velocity  $\mathbf{v}_A$  tangent to  $\hat{B}$  in  $P$  is found using the velocity obstacle  $VO$ , whose boundary  $\delta_f$  represents all front tangent velocities. Then, the intersection  $R$  of the trajectory line  $t$  with  $\delta_f$  gives the magnitude of  $\mathbf{v}_A$ . The magnitude of the corresponding relative velocity follows from the definition  $\mathbf{v}_{A,B} = \mathbf{v}_A - \mathbf{v}_B$ .

Note that the magnitude of the velocity  $\mathbf{v}_A$  tangent to  $\hat{B}$  in  $P' \in \partial B_r$  is simply given by the intersection  $S$  of  $t$  and  $\delta_r$ .  $\square$

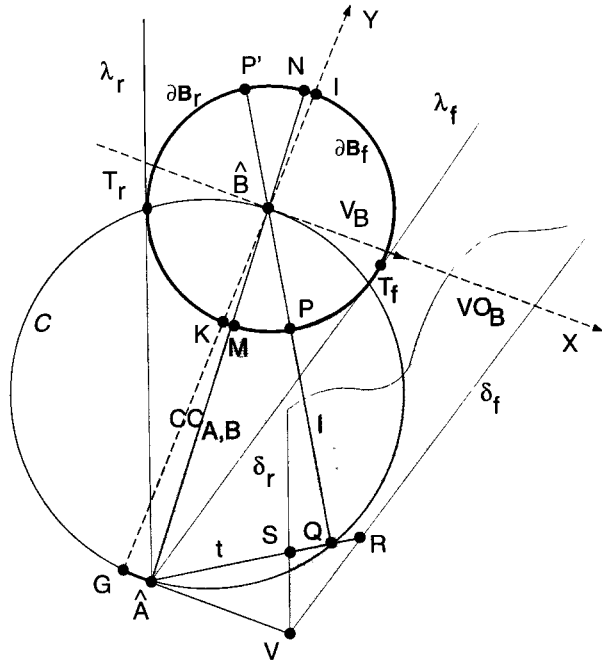


Fig. 23. Contact points of tangent trajectories.

#### Lemma 2 Proof

The subsets  $S_f$  and  $S_r$  of the reachable avoidance velocities RAV include in their boundary a segment of the boundary of the velocity obstacle  $VO_B$ ,  $\partial(VO_B)$ . Subset  $S_d$ , instead, does not include in its boundary any segment from the boundary of  $VO_B$ . From Lemma 1, velocities with tip on these segments generate trajectories grazing  $B$ , and therefore only subsets  $S_f$  and  $S_r$  include tangent velocities.

Tangent velocities separate collision velocities from avoidance velocities; therefore, a velocity  $\mathbf{v}_A \in \{S_f, S_r\}$  whose tip is away from the boundary  $\partial(VO_B)$  will generate a trajectory passing at a certain distance from  $B_j$ , on the same side of the tangent trajectory.

Similarly, trajectories generated by velocities  $\mathbf{v}_A \in S_d$  cannot be tangent to  $B$  in a finite time, since the boundary of  $S_d$  is the velocity parallel to  $\mathbf{v}_B$ . Therefore, if this subset exists in RAV, it contains all the velocities diverging from  $B$ .  $\square$

#### Theorem 1 Proof

From Lemma 2, each velocity obstacle  $VO_{B_j}$  divides the set of reachable avoidance velocities RAV into three nonoverlapping subsets. Then  $m$  obstacles,  $B_j$  ( $j = 1, \dots, m$ ), generate  $3m$  subsets that are partially overlapping. Let us assume that RAV is divided into  $l$  nonoverlapping subsets  $RAV_i$   $i = 1, \dots, l$ .

Each subset,  $\partial(RAV_i)$ , may include segments from the boundaries of some velocity obstacles  $VO_{B_j}$ ,  $\partial(VO_{B_j})$ . From Lemma 2, all velocities in the same subset  $RAV_i$  will

generate the same type of avoidance maneuver. Then, if the boundary of an  $RAV_i$ ,  $\partial(RAV_i)$ , includes segments from the boundary of  $n$  different velocity obstacles  $VO_{B_j}$  ( $j = 1, \dots, n$ ;  $n \leq m$ ), all velocities  $\mathbf{v}_A \in RAV_i$  will generate trajectories avoiding each of the  $n$  obstacles  $B_j$  ( $j = 1, \dots, n$ ;  $n \leq m$ ) with the maneuver determined by the portion of  $\partial(VO_{B_j})$  included in  $\partial(RAV_i)$ . Then, each subset  $RAV_i$  corresponds to a specific maneuver type, represented by indices  $i^j$ , where the index  $i$  represents the type of avoidance velocity, i.e., ( $i = f, r, d$ ), and  $j$ , ( $j = 1, \dots, m$ ) is the index of the obstacle.

Some obstacles do not contribute directly to the boundary of an  $RAV_i$  because a successive  $VO_{B_j}$  has covered the corresponding segment of the boundary of the  $RAV_i$ . In this case, the correct sequence of avoidances is generated incrementally during the computation of the  $RAV_i$ .  $\square$

### Appendix B: Generating the Set of Avoidance Velocities

The procedure used for generating the sets of reachable avoidance velocity RAV,  $S_i$  ( $i = d, f, r$ ), for robot  $A$  is illustrated in Figure 24. The figure shows the set of reachable velocities RV, the velocity obstacle  $VO_B$  for a long time horizon  $T_h$ , and the line  $l_{aa}$  passing through  $\hat{A}$  and the apex of  $VO_B$ . The  $S_i$  sets are represented by the ordered lists of their vertices  $V_i = \{(x_i, y_i), (l_{i-1}, l_i)\}$ , each specified by its position and its supporting lines. The lists are ordered counterclockwise so that the interior of the set is on the left of its boundary.

The procedure for computing  $S_i$  consists of the following steps:

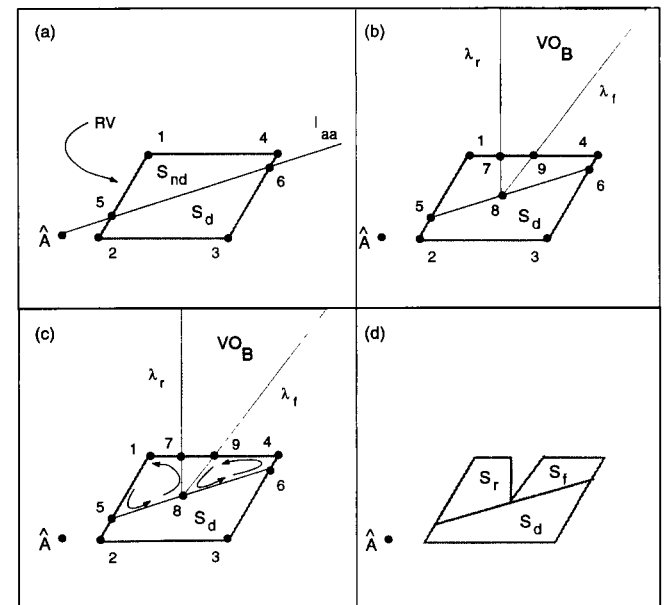


Fig. 24. The computation of the reachable avoidance velocities, RAV.

1. Compute the sets of diverging velocities and nondiverging velocities by intersecting RV with the line  $l_{aa}$ . Figure 24a shows the two sets represented by vertices (5, 2, 3, 6) and (1, 5, 6, 4), respectively. Label the set of diverging velocities  $S_d$  and the set of nondiverging velocities  $S_{nd}$ .
2. Compute the intersections between the boundary of  $S_{nd}$  and the velocity obstacle  $VO_B$ , and insert them into the list representing  $S_{nd}$ . Figure 24b shows the intersections as points (7, 8, 9). The new list representing  $S_{nd}$  becomes (1, 5, 8, 6, 4, 9, 7).
3. Compute the sets of noncolliding velocities, i.e.,  $(S_{nd} \ominus VO_B)$  by marching counterclockwise along the boundary of  $S_{nd}$  and clockwise along the boundary of  $VO_B$ , starting from the first vertex that is external to  $VO_B$ . This corresponds to assigning a positive value to  $S_{nd}$  and a negative value to  $VO_B$ . Figure 24c shows schematically the march along the boundaries of  $S_f$ , starting from vertex 1 and generating the difference sets represented by (9, 8, 6, 4) and (1, 5, 8, 7).
4. Label the noncolliding velocity sets according to the segments of  $VO_B$  included in their boundary. The set including a segment of the rear boundary of  $VO_B$   $\lambda_r$ , is the set of rear avoidance velocities  $S_r$ , and the set including a segment of the front boundary  $\lambda_f$  is the set of front avoidance velocities  $S_f$ , as shown in Figure 24d.

To consider multiple obstacles, this procedure is applied recursively to each subset  $S_i$ , ( $i = d, f, r$ ), of RAV, generating smaller subsets  $S_s$ , where the index  $s$  is a string representing the type and sequence of avoidance maneuvers of each obstacle. For example, three obstacles might generate up to nine avoidance velocity sets, such as  $S_{f r d}$  representing a front avoidance maneuver of the first obstacle, a rear avoidance of the second, and a diverging maneuver from the third obstacle.

The upper bound on the number of sets  $S_s$  is  $3m$ , where  $m$  is the number of obstacles in the environment. However, the actual number is much smaller, because the lines  $l_{aa}$  from  $A$  to the apex of each  $VO_{B_j}$  do not intersect each other. Also, many of the potential subsets  $S_s$  may be covered by some of the  $VO_{B_j}$ . Generally, we observed that the higher the number of obstacles, the fewer the sets  $S_s$  remaining to be computed. To ensure that the set RAV is not empty, sometimes it is necessary to shorten the time horizon, thus reducing the size of some of the  $VO_{B_j}$ .

## Acknowledgments

The authors are grateful to the anonymous reviewers for their suggestions and extensive reviews. The research described in this paper has been partially carried out at the Jet Propulsion Laboratory, California Institute of Technology, under a contract with the National Aeronautics and Space Administration.

## References

- Canny, J., and Reif, J. 1987. New lower bound techniques for robot motion planning problems. *28th IEEE Symp. on Found. of Comp. Sci.* Los Alamitos, CA: IEEE.
- Erdmann, M., and Lozano-Pérez, T. 1986 (San Francisco, CA, April). On multiple moving objects. *Algorithmica* 2(4):477–521.
- Featherstone, R. 1990. Swept bubbles: A method of representing swept volume and space occupancy. Technical Reports TR-90-024 and MS-90-069, Philips Laboratories, North American Philips Corporation, Briarcliff Manor, New York 10510.
- Fiorini, P. 1995. Robot motion planning among moving obstacles. Ph.D. thesis, University of California, Los Angeles.
- Fiorini, P., and Shiller, Z. 1993. Motion planning in dynamic environments using the relative velocity paradigm. *IEEE Int. Conf. of Automat. and Robotics*, vol. 1. Los Alamitos, CA: IEEE, pp. 550–566.
- Fiorini, P., and Shiller, Z. 1995. Robot motion planning in dynamic environments. *Int. Symp. of Robot. Res.*, eds. G. Girard, and G. Hirzinger. Munich, Germany: Springer-Verlag, pp. 237–248.
- Fiorini, P., and Shiller, Z. 1996 (Minneapolis, MN). Time optimal trajectory planning in dynamic environments. *IEEE Int. Conf. of Automat. and Robot.*, vol. 2, pp. 1553–1558.
- Fiorini, P., and Shiller, Z. 1997. Time optimal trajectory planning in dynamic environments. *J. Appl. Math. and Comp. Sci.*, 7(2):101–126.
- Fraichard, T. 1993 (Yokohama, Japan). Dynamic trajectory planning with dynamic constraints: a state-time space approach. *IEEE/RSJ Int. Conf. on Intell. Robots and Sys.*, pp. 1393–1400.
- Fraichard, T., and Laugier, C. 1993 (Atlanta, GA). Path-velocity decomposition revisited and applied to dynamic trajectory planning. *IEEE Int. Conf. of Automat. and Robot.*, vol. 1. Los Alamitos, CA: IEEE, pp. 40–45.
- Fujimura, K. 1994. Motion planning amid transient obstacles. *Int. J. Robot. Res.* 13(5):395–407.
- Fujimura, K. 1995. Time-minimum routes in time-dependent networks. *IEEE Trans. Robot. Automat.* 11(3):343–351.
- Fujimura, K., and Samet, H. 1989a. A hierarchical strategy for path planning among moving obstacles. *IEEE Trans. Robot. Automat.* 5(1):61–69.
- Fujimura, K., and Samet, H. 1989b (Scottsdale, AZ). Time-minimal paths among moving obstacles. *IEEE Int. Conf. on Robot. and Automat.* Los Alamitos, CA: IEEE, pp. 1110–1115.
- Fujimura, K., and Samet, H. 1990 (Cincinnati, OH). Motion planning in a dynamic domain. *IEEE Int. Conf. on Robot. and Automat.* Los Alamitos, CA: IEEE, pp. 324–330.
- Fujimura, K., and Samet, H. 1993. Planning a time-minimal motion among moving obstacles. *Algorithmica* 10:41–63.

- Hayward, V., Aubry, S., Foisy, A., and Ghallab, Y. 1995. Efficient collision prediction among many moving obstacles. *Int. J. Robot. Res.* 14(2):129–143.
- Kant, K., and Zucker, S. 1986. Towards efficient trajectory planning: The path-velocity decomposition. *Int. J. Robot. Res.* 5(3):72–89.
- Korf, R. 1985. Depth-first iterative-deepening: An optimal admissible tree search. *Art. Intell.* (27):97–109.
- Lee, B., and Lee, C. 1987. Collision-free motion planning of two robots. *IEEE Trans. Sys. Man Cybernetics* 17(1):21–32.
- Nilsson, X. 1980. *Principles of Artificial Intelligence*. Palo Alto, CA: Tioga.
- O'Rourke, J., and Badler, N. 1979. Decomposition of three-dimensional objects into spheres. *IEEE Trans. Pattern Analysis Machine Intell.* 1(3): 295–305.
- Pearl, J. 1985. *Heuristics*. Reading, MA: Addison-Wesley.
- Reif, J., and Sharir, M. 1985. Motion planning in the presence of moving obstacles. *25th IEEE Symp. on the Found. of Comp. Sci.*, pp. 144–153.
- Reif, J., and Sharir, M. 1994. Motion planning in the presence of moving obstacles. *J. ACM* 41(4):764–790.
- Sanborn, J., and Hendler, J. 1988. A model of reaction for planning in dynamic environments. *Int. J. Art. Intell. Eng.* 3(2):95–101.
- Shiller, Z., and Sundar, S. 1996 (San Francisco, CA). Emergency maneuvers of autonomous vehicles. *The 13th World Congress, IFAC9U*, vol. Q, pp. 393–398.
- Tsubouchi, T., and Arimoto, S. 1994 (San Diego, CA). Behavior of a mobile robot navigated by an iterated forecast and planning scheme in the presence of multiple moving obstacles. *IEEE Conf. on Robot. and Automat.*, pp. 2470–2475.