



FRONT ELEVATION — D2 · D3

7 ft 7 in x 2 ft 6 in · SINGLE LEAF

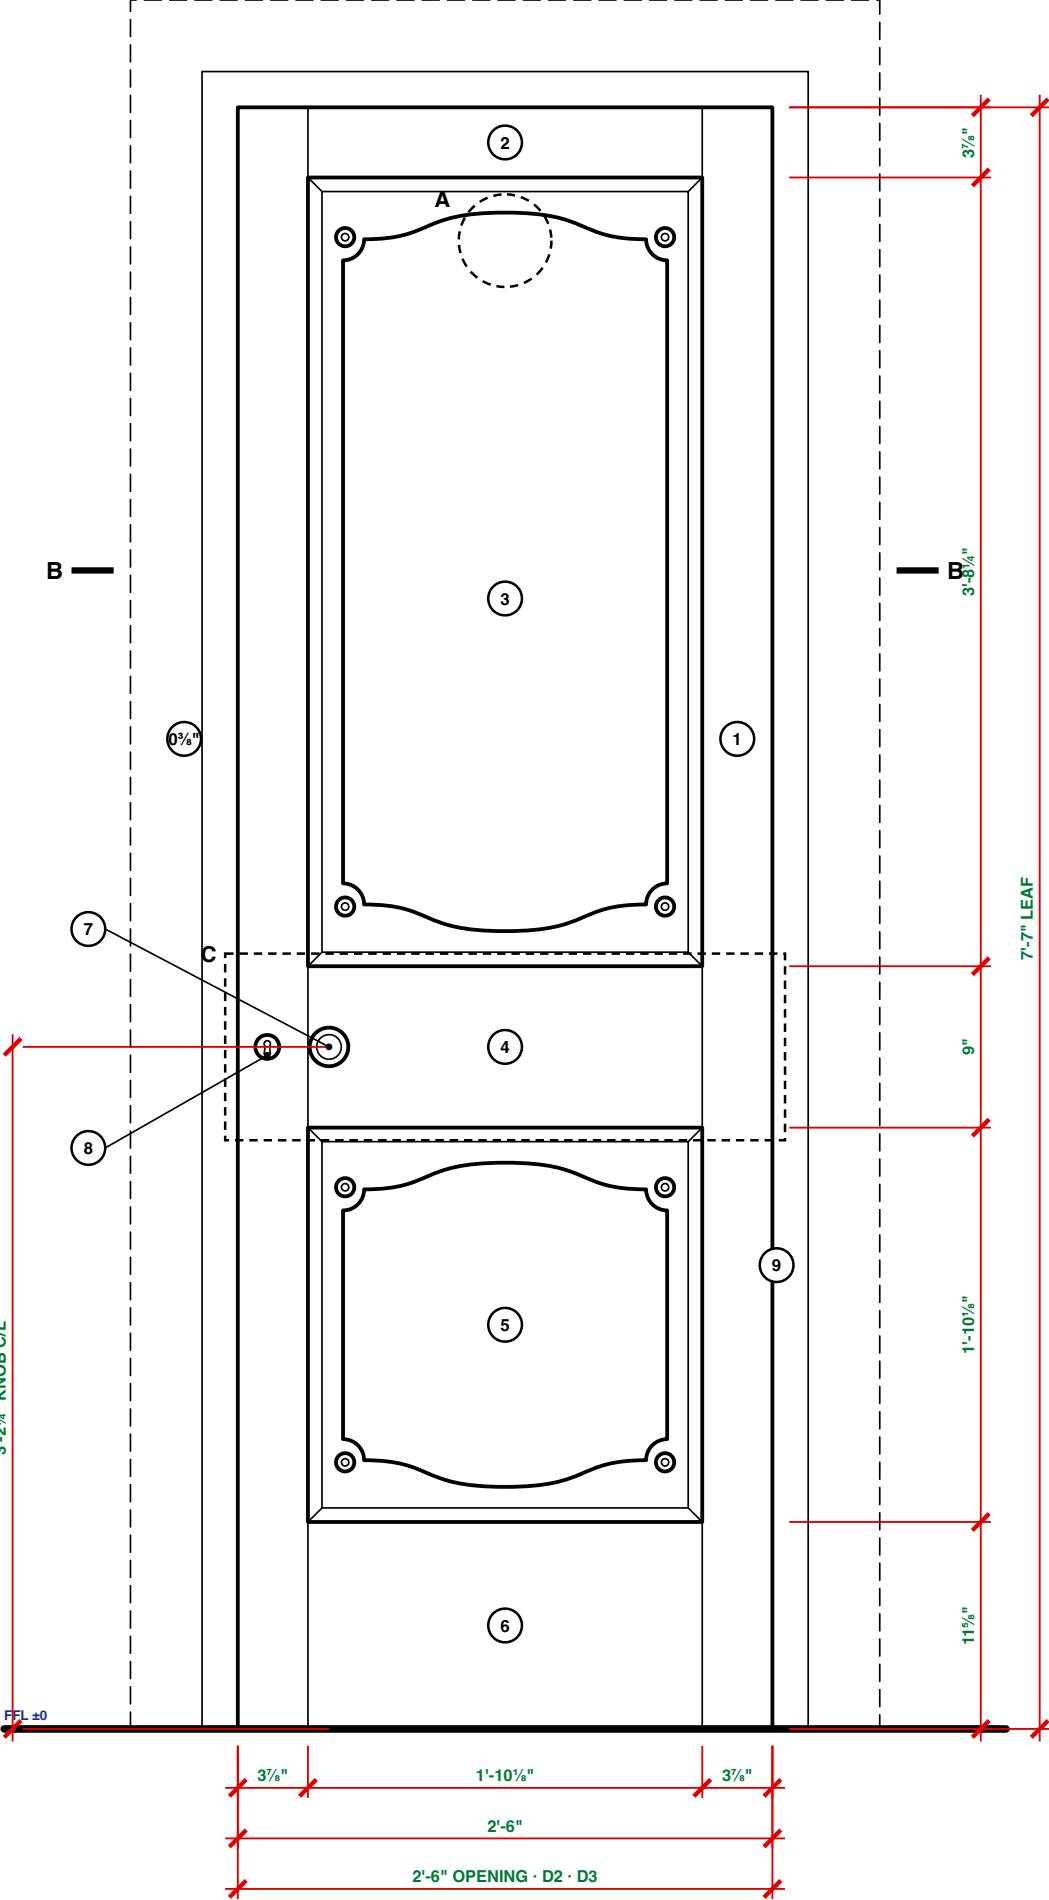

DETAIL A — PANEL HEAD

FOOT OF PANEL IS THE MIRROR

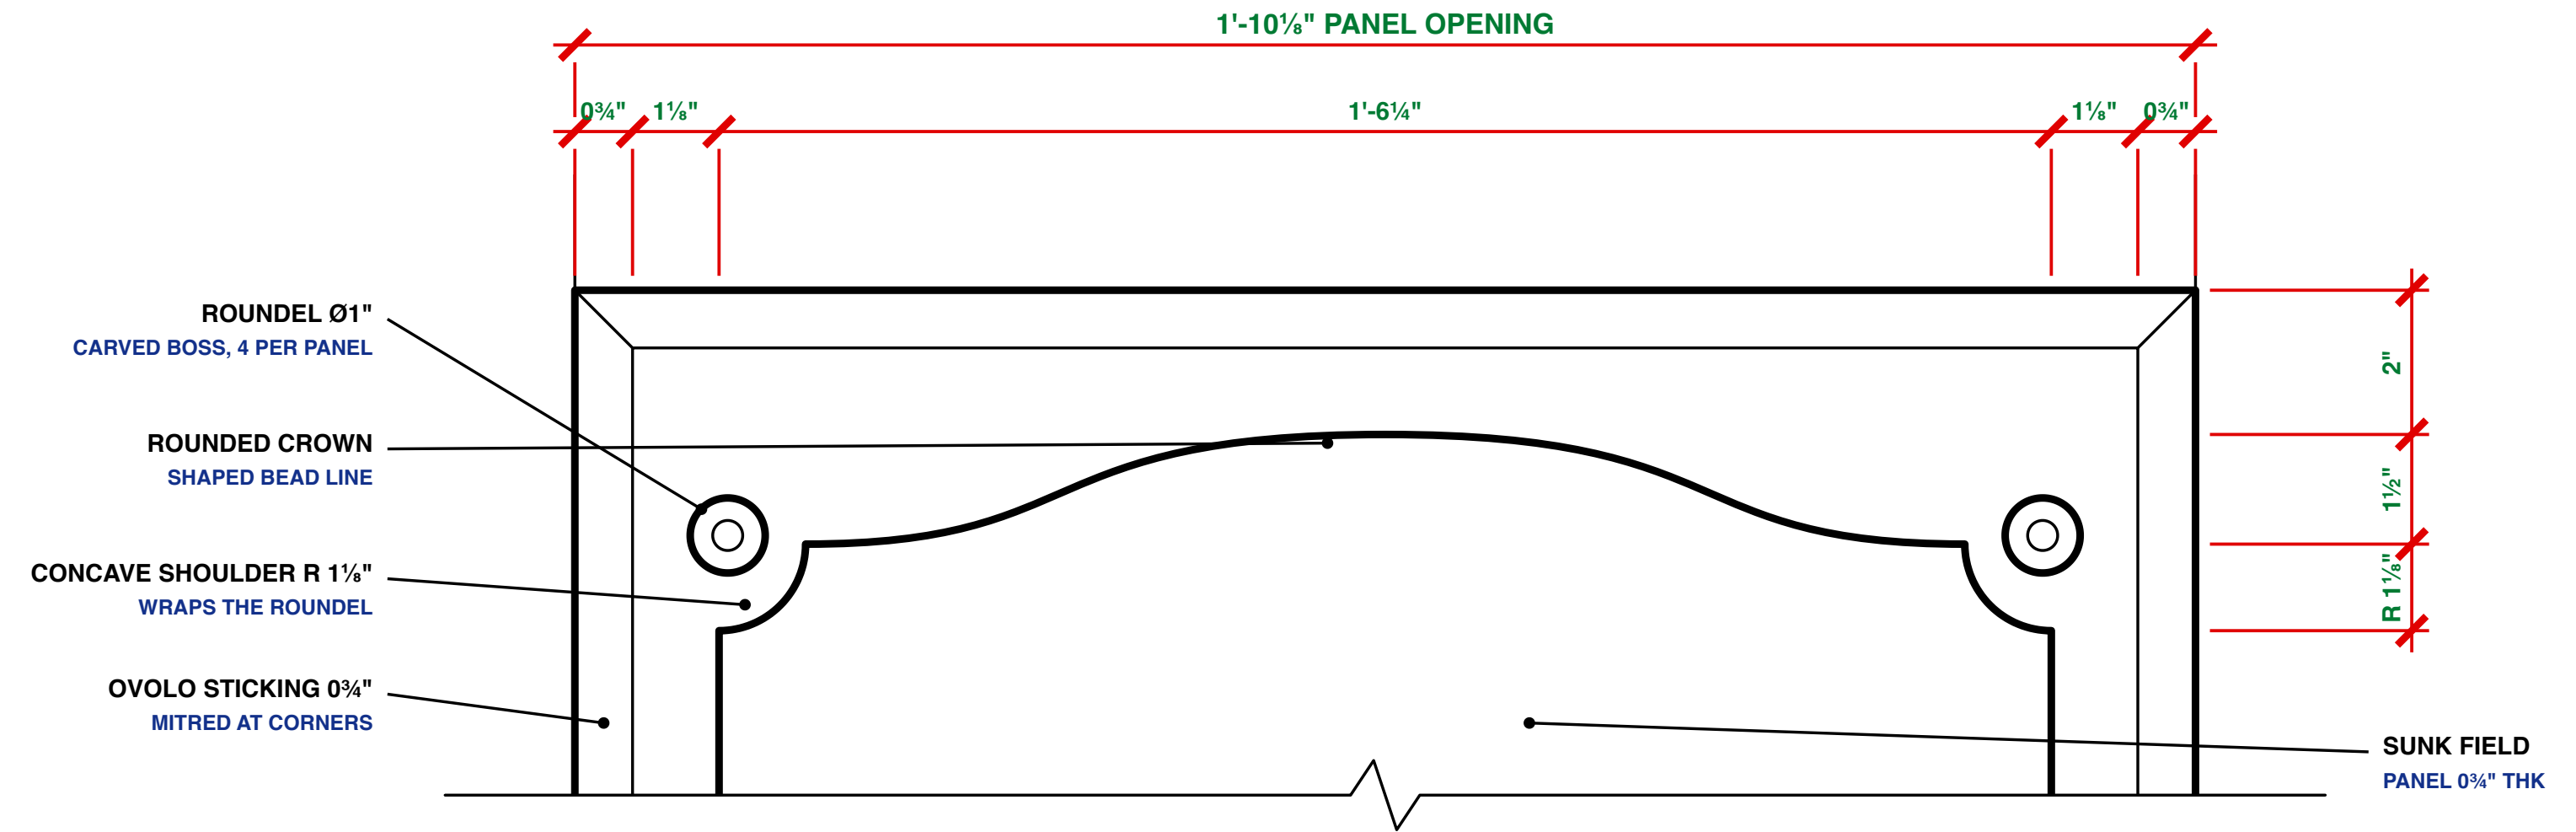

KEY

PARTS OF THE LEAF

- 1 Stile
- 2 Top rail
- 3 Upper panel — shaped bead, 4 roundels
- 4 Lock rail
- 5 Lower panel — same pattern
- 6 Bottom rail
- 7 Knob Ø2¹/₈"
- 8 Keyhole escutcheon
- 9 Meeting bead (pair only)
- 10³/₈" Architrave — to design

NOTES

READ BEFORE MAKING

Dimensions in feet and inches. Do not scale.

Proportions taken from a film-still reference;

leaf size, opening and thickness are ASSUMED.

Knob centre lands 3'-1¾" above the floor — normal height.

D2 · D3 — DRESSING · BATHROOM, 7 ft 7 in × 2 ft 6 in.

Set out on the panel square. The 2 ft 6 leaf gives a

1'-10⅛" panel; the upper panel is two of those squares

(3'-8¼"), the lower is one (1'-10⅛"). Rails follow: top 3⅞",

lock 9", bottom 11⅝". Knob centre 3'-2¼" above the floor.

Both widths take the identical rails and mouldings, so

only the panel width changes — here 1'-10⅛" per panel.

Solid teak frame. Veneer and polish per

Materials; polish to match the teak desk.


Casing: 2 in lining plus 4 in moulding over it, so the

moulding head sits 6" above the leaf.

See AST-DR-011 (option A) and AST-DR-012 (option B).

SECTION B–B

HORIZONTAL THROUGH UPPER PANELS

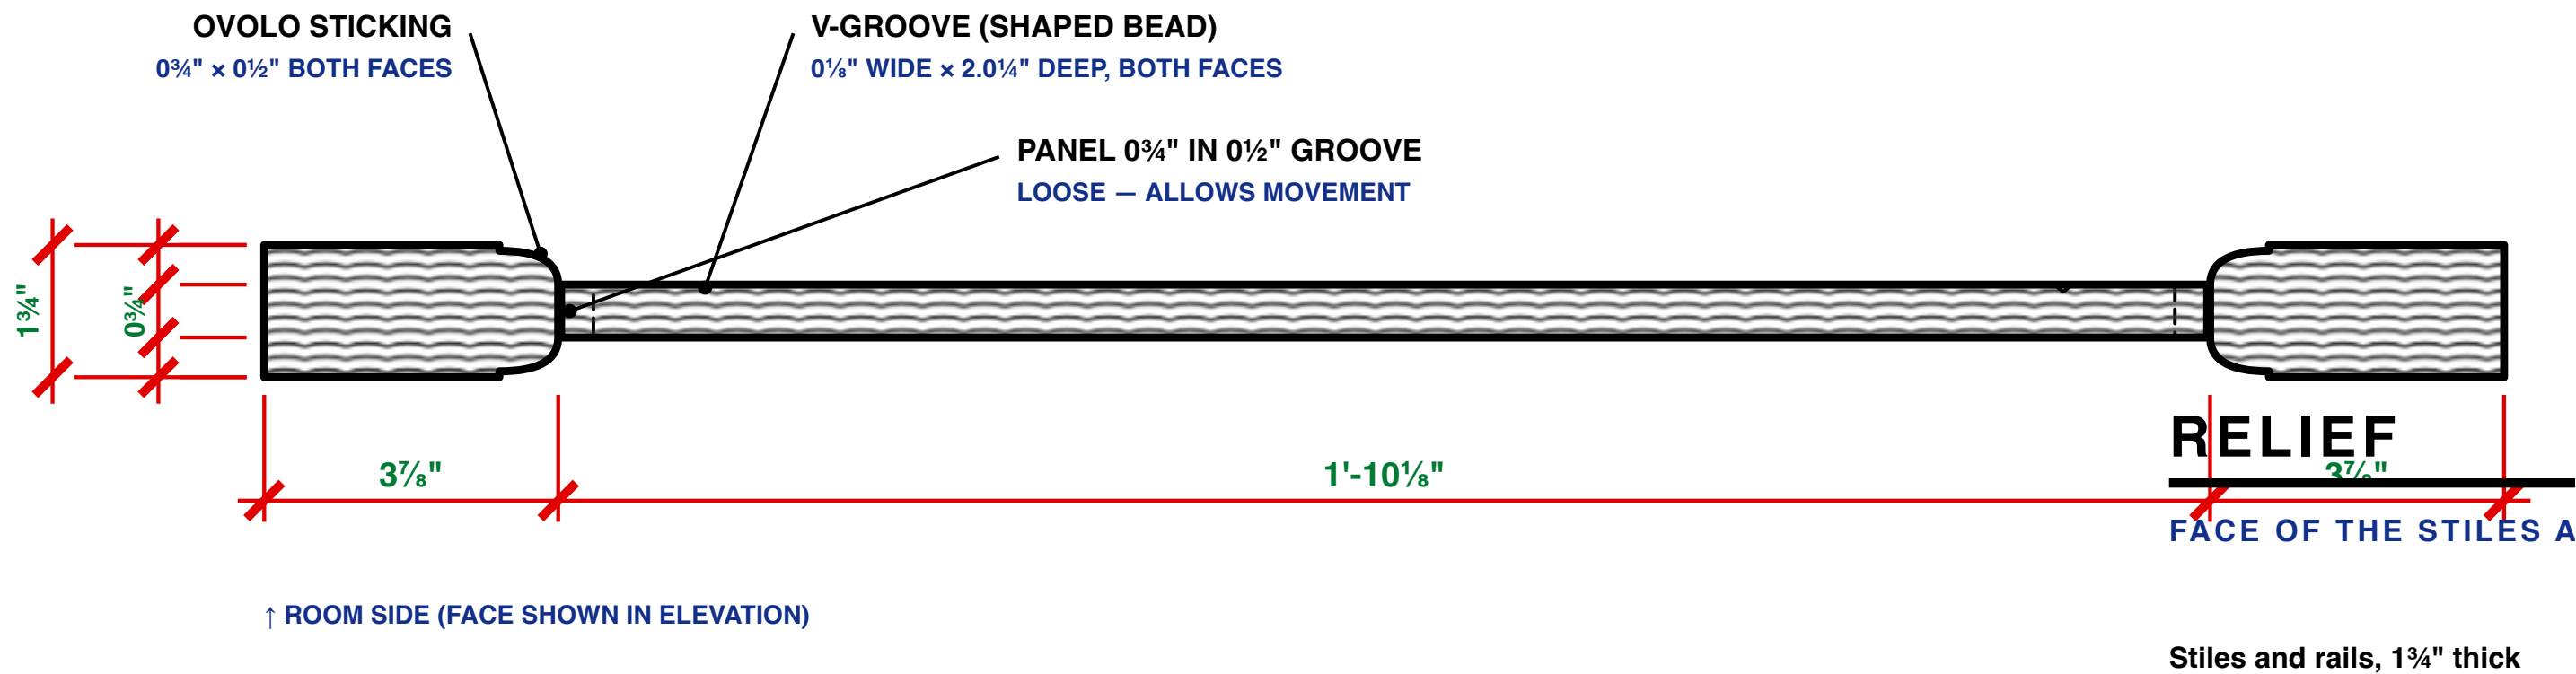



RELIEF

37 1/2"

See AST-DR-011 (option A) and AST-DR-012 (option B).

Hinges and lock not yet designed.

FACE OF THE STILES AND RAILS = DATUM 0

Stiles and rails, 1 3/4" thick

DATUM 0

Ovolo sticking, 3/4" wide

WORKED ON THE FRAME EDGE

Panel, 3/4" thick, loose in a 1 1/2" groove

—

Panel field

1 1/2" IN

Shaped bead line round the field

2.5 IN

Roundel boss Ø1", four per panel

1/8" OUT

Mitres at the sticking corners

CUT, NOT SCRIBED

Knob Ø2 1/8" and escutcheon Ø1 3/8"

SURFACE

DETAIL C — LOCK RAIL

ACTIVE LEAF

