



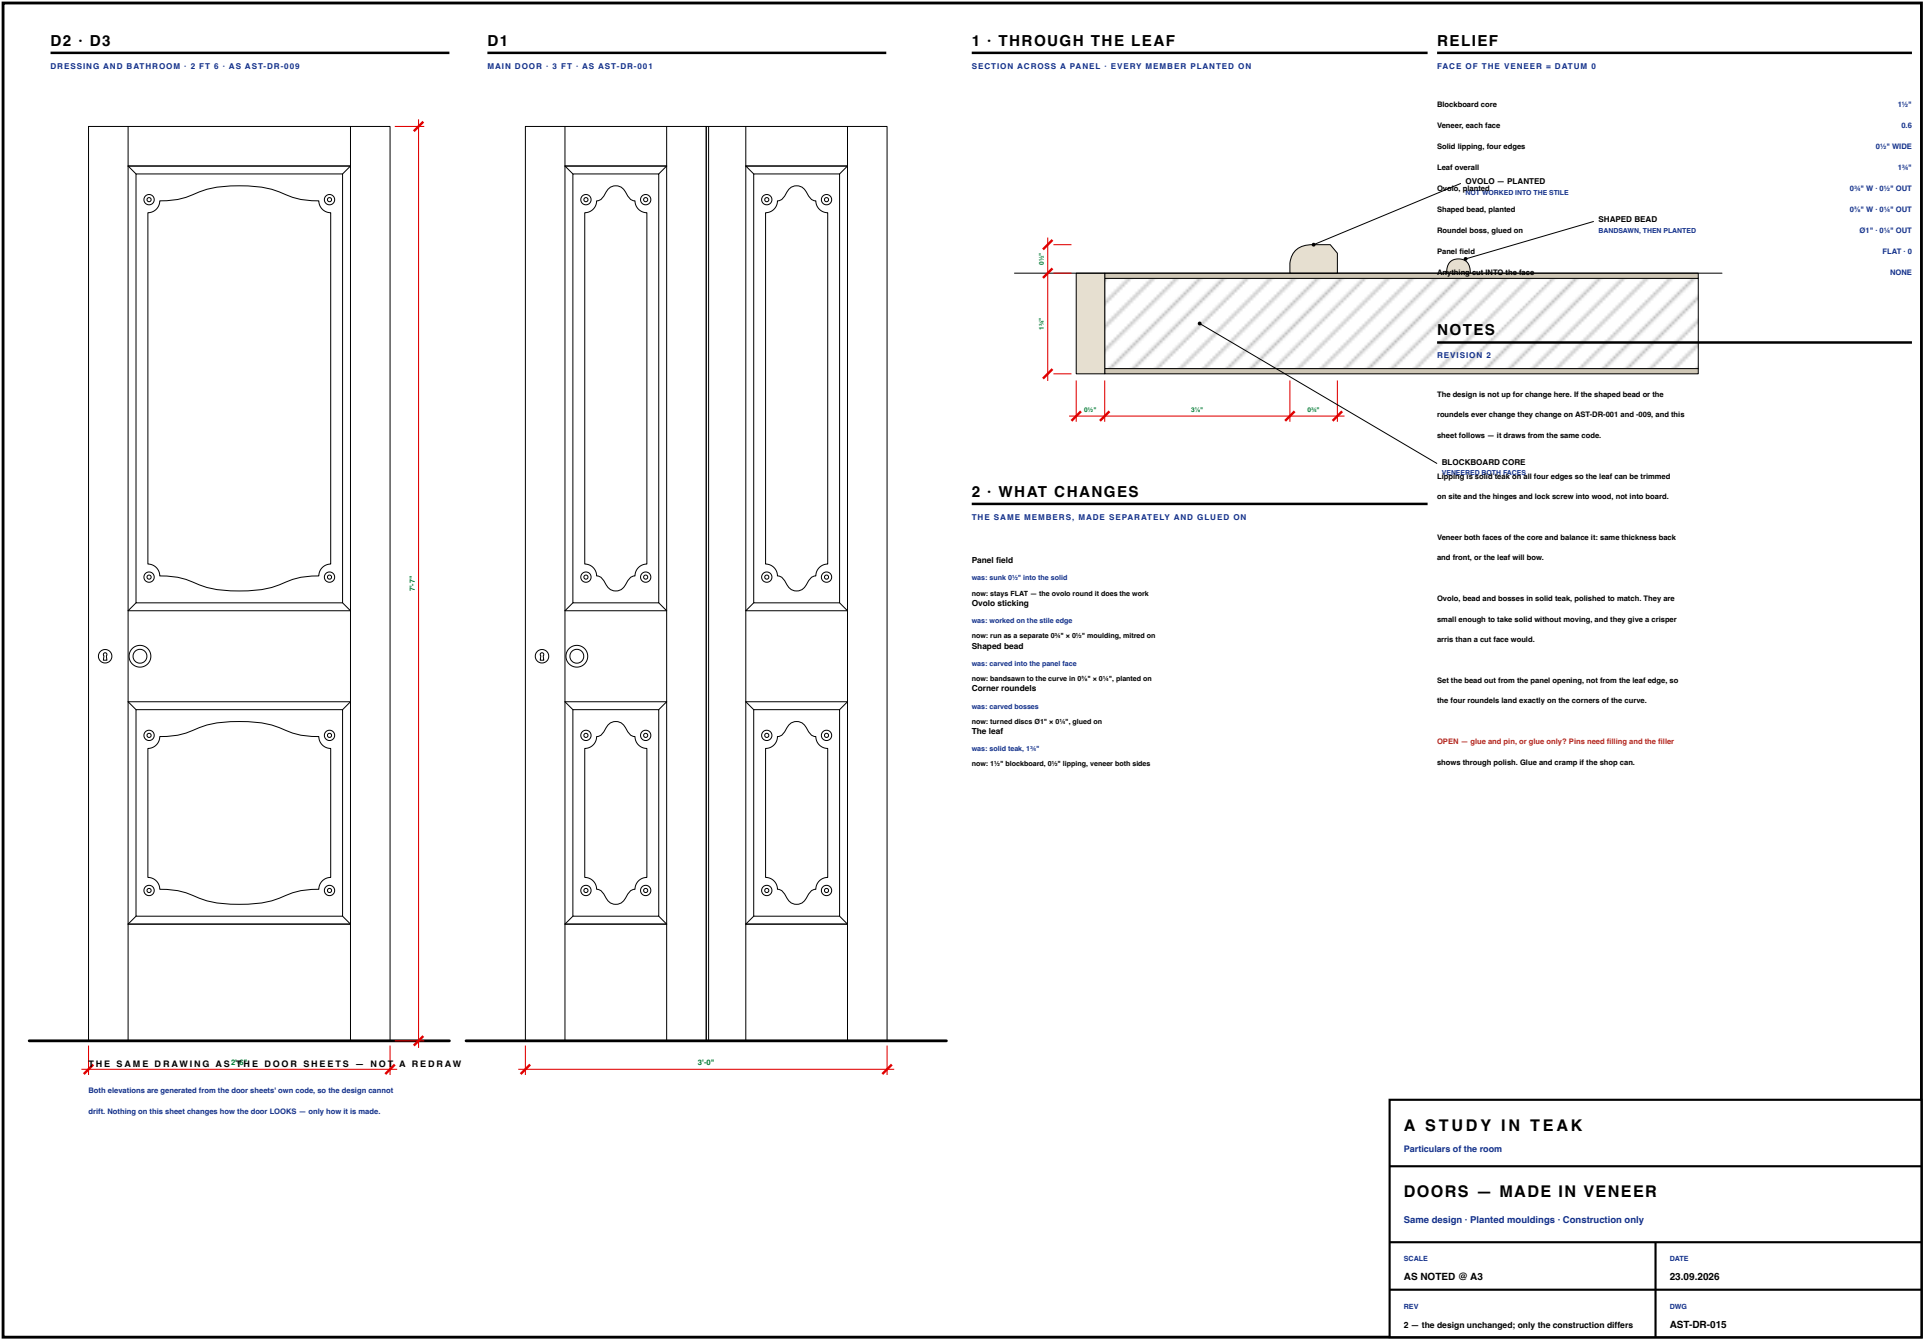

D2 · D3


DRESSING AND BATHROOM · 2 FT 6 · AS AST-DR-009

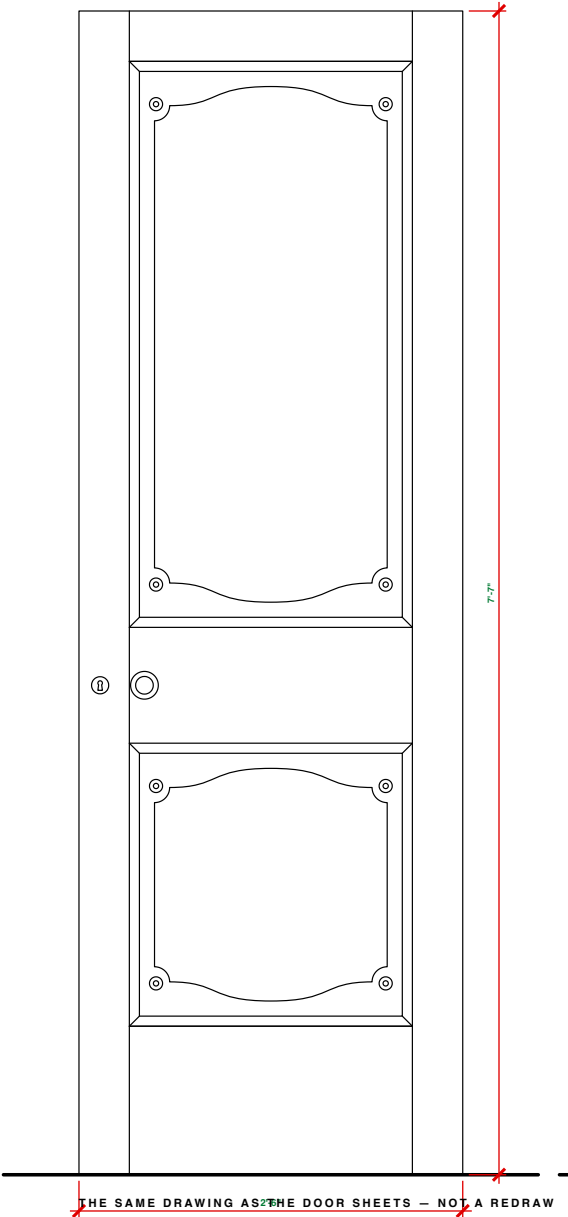

Both elevations are generated from the door sheets' own code, so the design cannot drift. Nothing on this sheet changes how the door LOOKS — only how it is made.

D1

MAIN DOOR - 3 FT - AS AST-DR-001

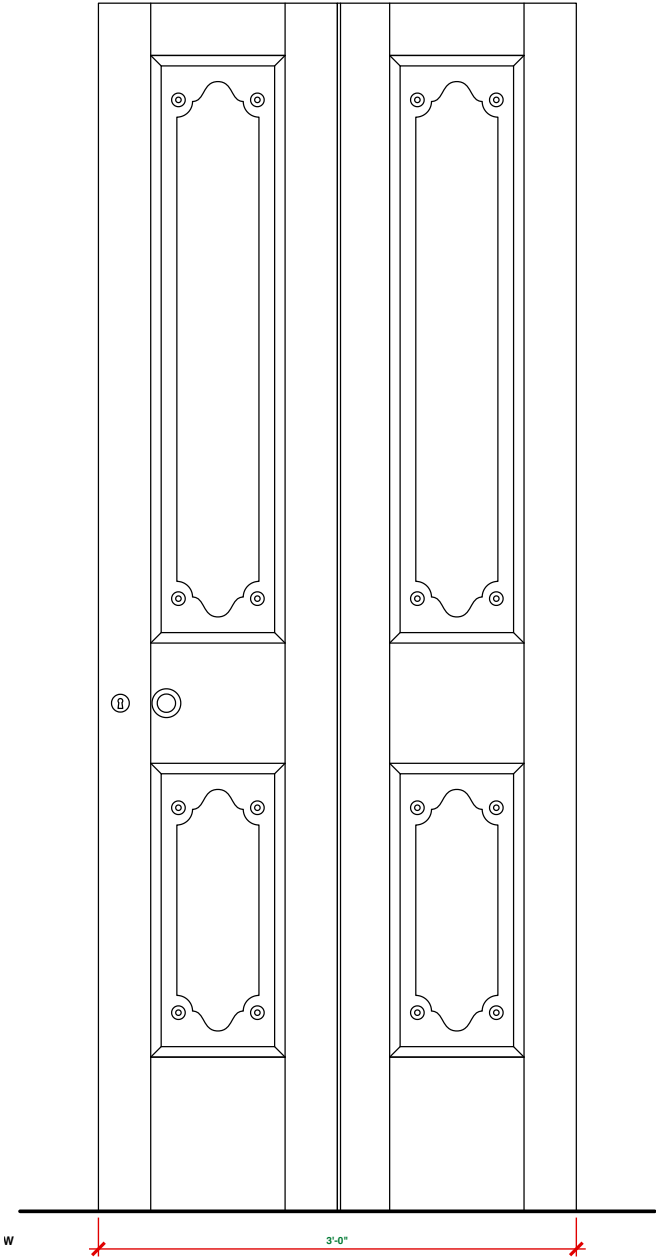


1 · THROUGH THE LEAF

SECTION ACROSS A PANEL · EVERY MEMBER PLANTED ON

RELIEF

FACE OF THE VENEER = DATUM 0

- Blockboard core
- Veneer, each face
- Solid lipping, four edges
- Leaf overall
- OVOLO — PLANTED
~~Ovolo, planted~~
NOT WORKED INTO THE STILE
- Shaped bead, planted
- Roundel boss, glued on
- Panel field
- SHAPED BEAD
BANDSAWN, THEN PLANTED
- Anything cut INTO the face

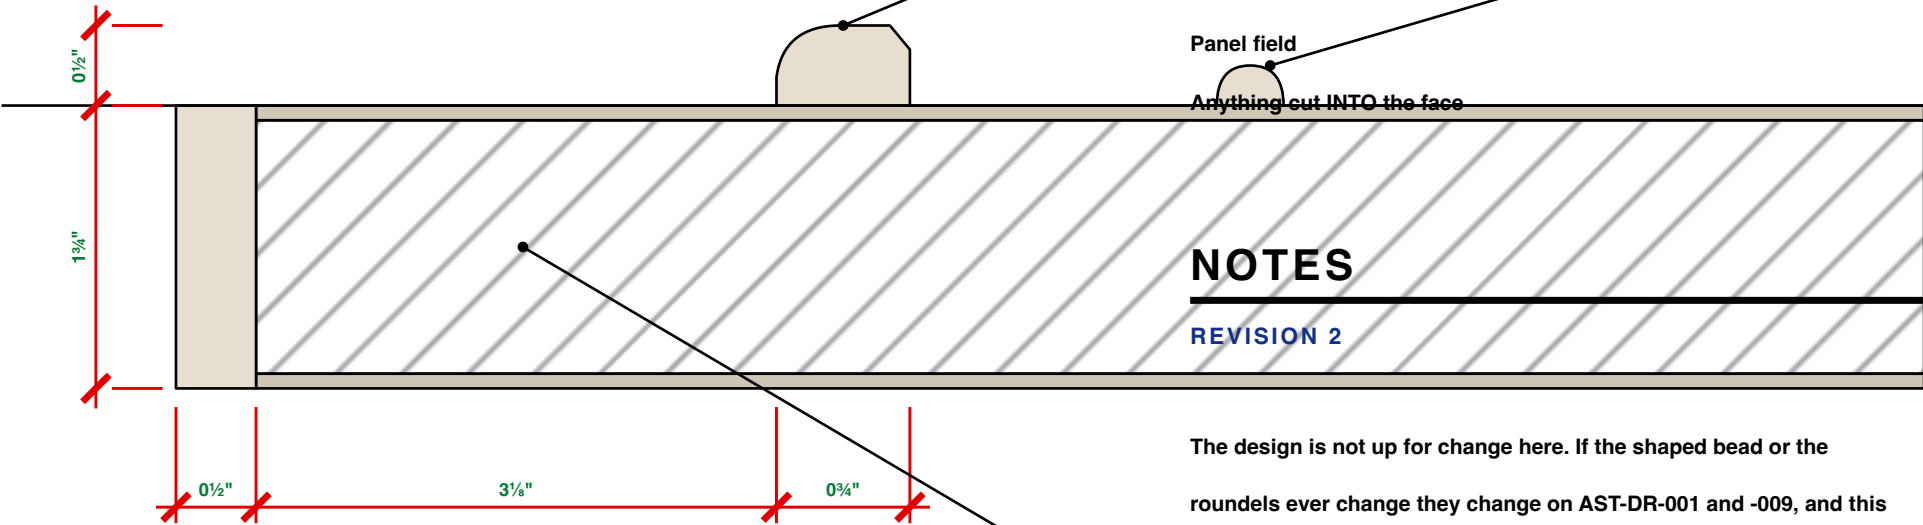

NOTES

REVISION 2

The design is not up for change here. If the shaped bead or the roundels ever change they change on AST-DR-001 and -009, and this sheet follows — it draws from the same code.

BLOCKBOARD CORE
VENEERED BOTH FACES
All four edges so the leaf can be trimmed

RELIEF

FACE OF THE VENEER = DATUM 0

Blockboard core	1½"
Veneer, each face	0.6
Solid lipping, four edges	0½" WIDE
Leaf overall	1¾"



NOTES

REVISION 2

The design is not up for change here. If the shaped bead or the roundels ever change they change on AST-DR-001 and -009, and this sheet follows — it draws from the same code.

BLOCKBOARD CORE
VENEERED BOTH FACES
Lipping is solid teak on all four edges so the leaf can be trimmed on site and the hinges and lock screw into wood, not into board.

Veneer both faces of the core and balance it: same thickness back and front, or the leaf will bow.

Ovolo, bead and bosses in solid teak, polished to match. They are small enough to take solid without moving, and they give a crisper arris than a cut face would.

Set the bead out from the panel opening, not from the leaf edge, so the four roundels land exactly on the corners of the curve.

OPEN — glue and pin, or glue only? Pins need filling and the filler shows through polish. Glue and cramp if the shop can.

2 · WHAT CHANGES

THE SAME MEMBERS, MADE SEPARATELY AND GLUED ON

Panel field

was: sunk 0½" into the solid

now: stays FLAT — the ovolo round it does the work
Ovolo sticking

was: worked on the stile edge

now: run as a separate 0¾" × 0½" moulding, mitred on
Shaped bead

was: carved into the panel face

now: bandsawn to the curve in 0⅜" × 0¼", planted on
Corner roundels

was: carved bosses

now: turned discs Ø1" × 0¼", glued on
The leaf

was: solid teak, 1¾"

now: 1½" blockboard, 0½" lipping, veneer both sides