Test Report

Environment: macOS, Python 3.15 venv, everything on one machine (loopback). Paths are emulated by `mpft/emulator.py`. Unit tests: `pytest -q` (20 tests, about 12 s). Experiments: `python experiments/run_experiments.py` with a 50 MB random file, 256 KiB chunks unless stated; raw data in `results/*.csv`. Each experiment ran once, so small differences between rows are within noise. Default emulated path: 40 Mbit/s, 10 ms one-way delay.

1. Automated tests

ID	Scenario	Expected	Actual	Result
U1	Header is 20 bytes and round-trips	pack/unpack identical	as expected	pass
U2	Header with flipped byte	CRC error raised	`ProtocolError`	pass
U3	Header with wrong magic	rejected	`ProtocolError`	pass
U4	Message with payload over a socket	same type, session, index, payload	as expected	pass
U5	Frame delivered 1 byte at a time	reassembled correctly	as expected	pass
U6	20 MB, 4 paths, loopback	SHA-256 of output equals input, no `.part` left	match, all bytes counted	pass
U7	Chunk with one flipped bit	NACK, nothing stored; clean resend gets ACK	as expected	pass
U8	Duplicate and out-of-order chunks	all ACKed, file correct after DONE	as expected	pass
U9	Path killed after 1 MiB (proxy dies)	transfer completes via other path, failure recorded	success, hash match	pass
U10	Path goes silent (swallows data), 0.4 s timeout	timeout, other path finishes	success, hash match	pass
U11	`corrupt_rate=0.1` on 2 paths	retransmissions > 0, file correct	as expected	pass
U12	`corrupt_rate=1.0`	gives up after 5 retries, `success=False`	error mentions retries	pass
U13	Resume after interruption (half the chunks stored, receiver restarted)	only the missing half is sent	`resumed_chunks` = half, bytes = half	pass
U14	Resume when a stored chunk is damaged	damaged chunk not trusted, resent	15 of 16 resumed, hash match	pass
U15	Fast path (1 ms) vs slow path (20 ms, 8 Mbit/s)	fast path carries more than 2x slow	as expected	pass
U16	1 MiB through 8 Mbit/s limiter	takes about 1 s or more	over 0.8 s	pass
U17	Emulator `drop_after_s`	path dies, survivor finishes	success, path marked dead	pass
U18	Emulator `corrupt_rate=0.02` on both paths	transfer survives	success	pass


ID	Scenario	Expected	Actual	Result
U19	Dashboard API with real sender and receiver	both sessions listed, 4/4 chunks, verified	as expected	pass
U20	Dashboard with junk and old status files	junk skipped, old marked stale	as expected	pass


2. Experiments


ID	Scenario	Expected	Actual (from CSV)	Result
E1	1/2/4/8 paths, equal paths	goodput grows with paths	23.0 / 45.5 / 89.2 / 171.9 Mbit/s (18.2 s down to 2.4 s)	pass
E2	Paths 80/20/5 Mbit/s	faster paths carry more	74 % / 20 % / 6 % of bytes, 7.6 s	pass
E3	2 paths, one gets 0/25/50/100/200 ms delay (+25 % jitter)	time rises, slow path share falls	7.8 / 10.7 / 12.2 / 14.4 / 16.0 s; slow path share 58 % down to 16 %	pass
E4	3 paths, path 2 dies at 1.5 s	completes, SHA-256 verified, fast recovery	success, 8.5 s vs 6.2 s without failure, 1 retransmission, recovery 0.15 s	pass
E5	Chunk corruption 0 / 1 / 5 %, 4 paths	all succeed, retransmissions near rate	0 / 2 / 12 retransmitted of 200 chunks; time 4.7 / 4.8 / 5.0 s	pass
E6	Chunk size 64 KiB / 256 KiB / 1 MiB / 4 MiB	larger chunks give higher goodput up to a point	50.2 / 90.0 / 107.0 / 107.1 Mbit/s	pass
E7	Kill sender at 40 %, run again	resumed run sends only missing chunks	killed at 3.8 s with 80/200 held; resumed run 5.7 s vs 9.2 s full, 80 chunks skipped	pass


Recovery time is measured from the moment the sender detects the dead path to the moment the chunk that was in flight on it is acknowledged through another path. The emulator closes sockets, so detection is immediate; a silent black hole would add up to the chunk timeout (5 s default).


3. Graphs

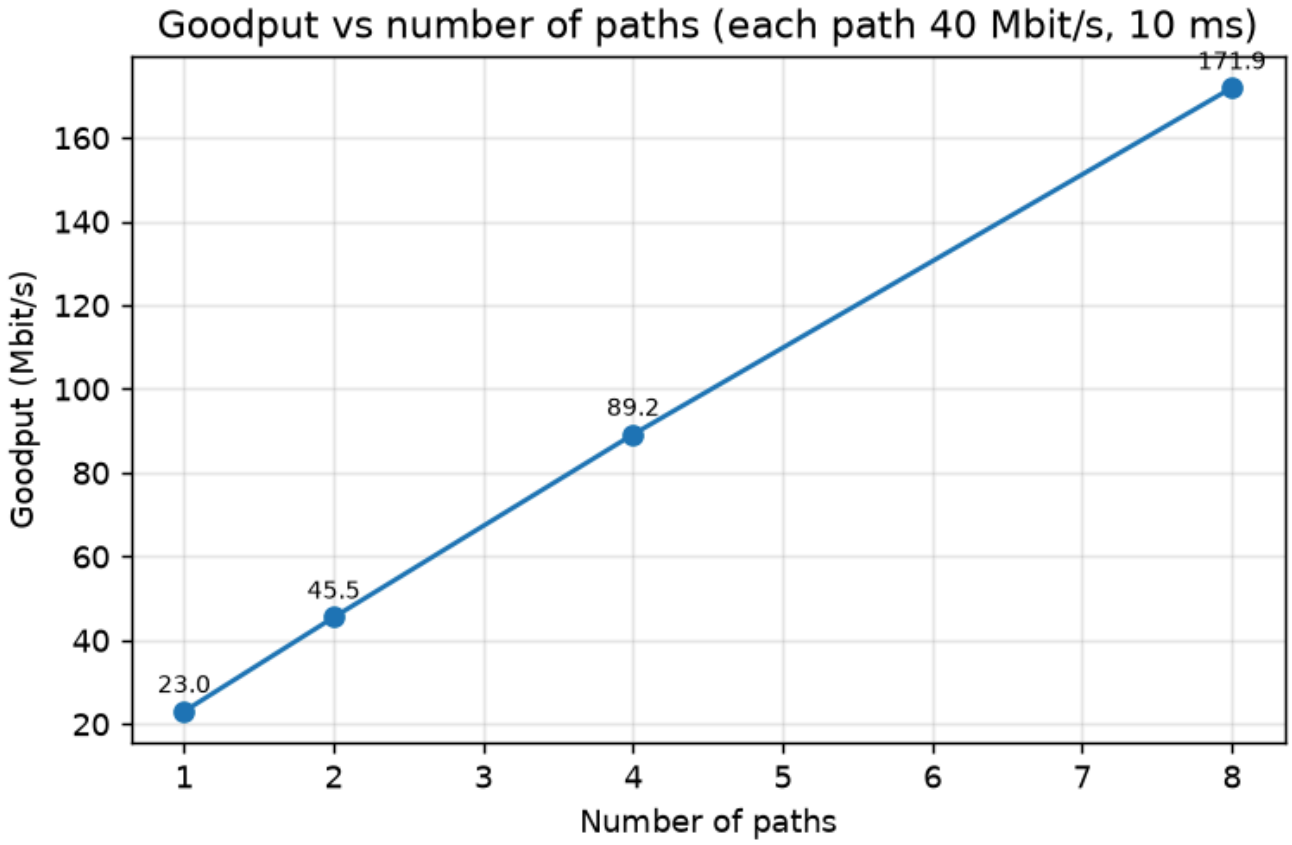

Goodput vs number of paths (each path 40 Mbit/s, 10 ms)
Goodput (Mbit/s)
Number of paths
23.0
45.5
89.2
171.9

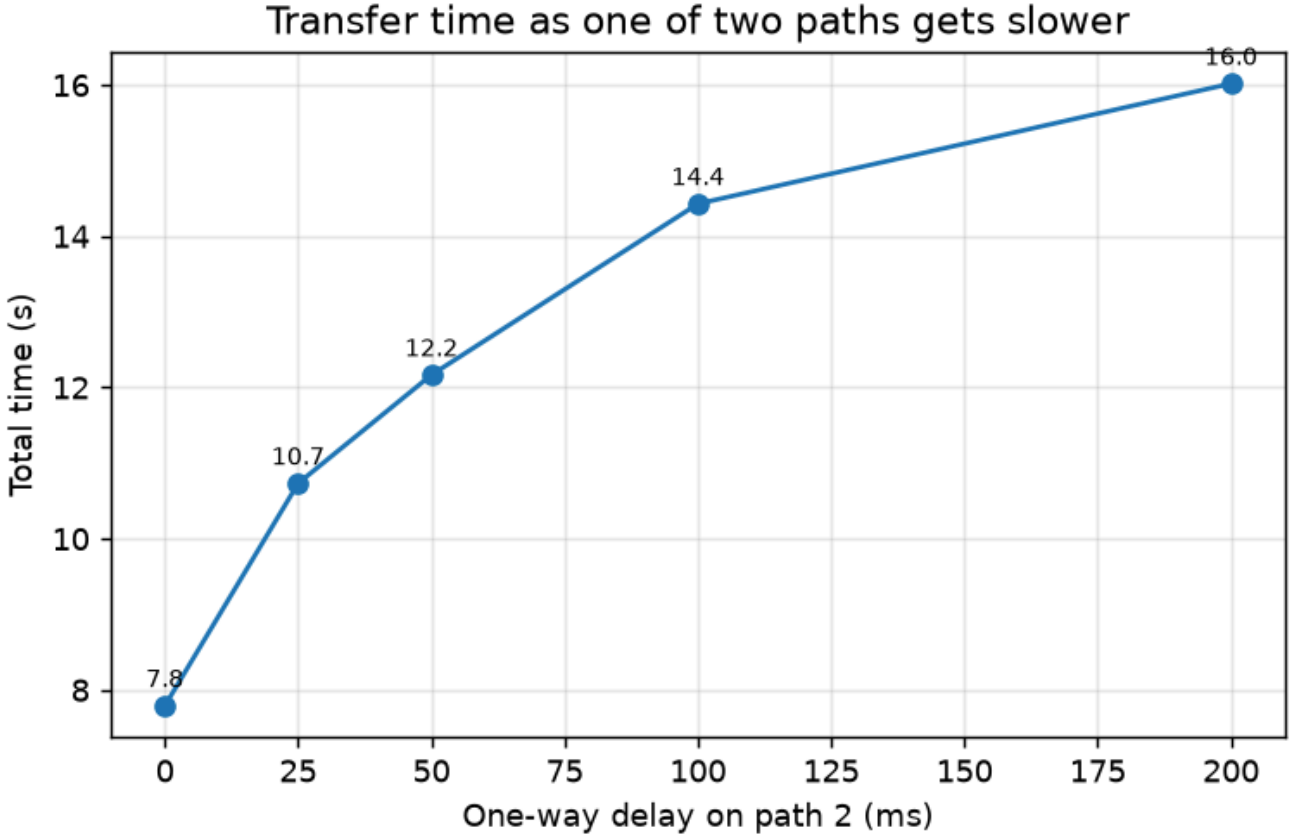
Transfer time as one of two paths gets slower
Total time (s)
One-way delay on path 2 (ms)
7.8
10.7
12.2
14.4
16.0

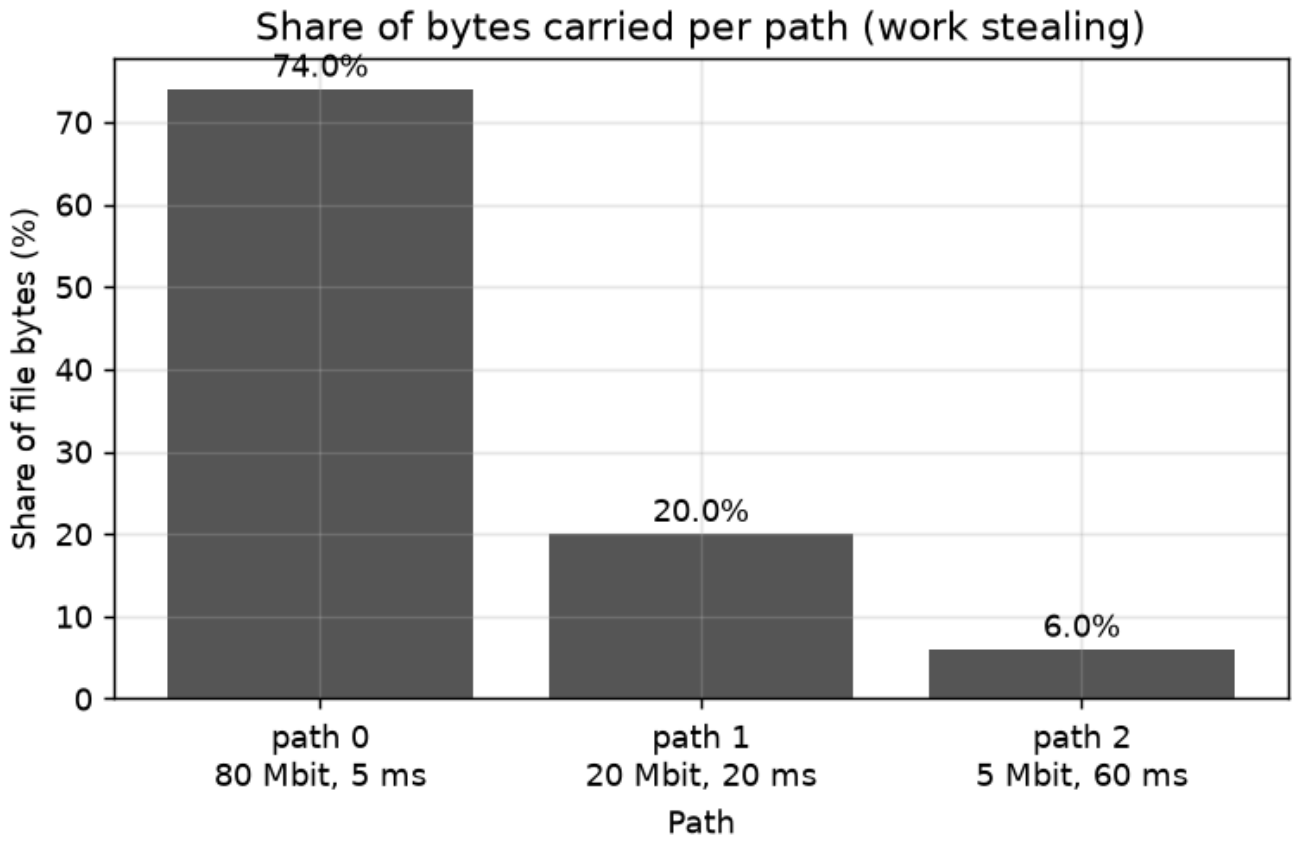
Share of bytes carried per path (work stealing)
74.0%
20.0%
6.0%
Share of file bytes (%)
0
10
20
30
40
50
60
70
path 0
80 Mbit, 5 ms
path 1
20 Mbit, 20 ms
path 2
5 Mbit, 60 ms
Path

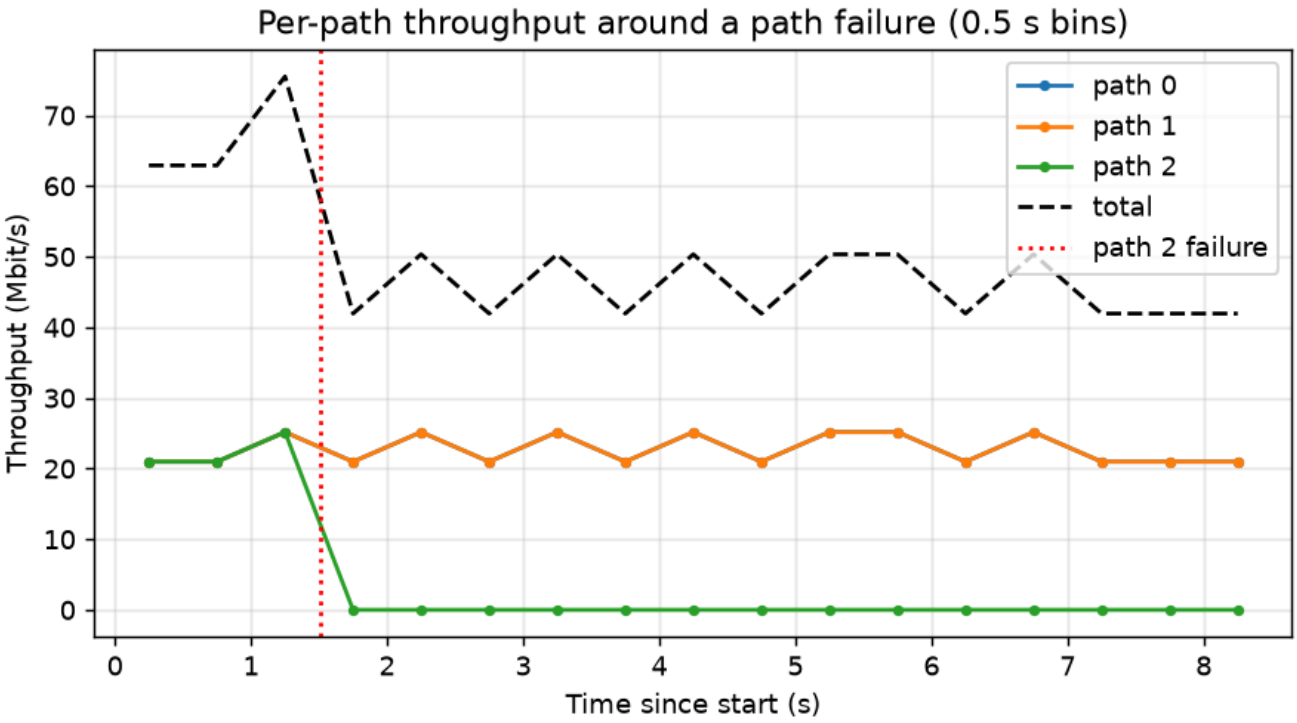
Per-path throughput around a path failure (0.5 s bins)
path 0
path 1
path 2
total
path 2 failure
Throughput (Mbit/s)
0
10
20
30
40
50
60
70
0
1
2
3
4
5
6
7
8
Time since start (s)

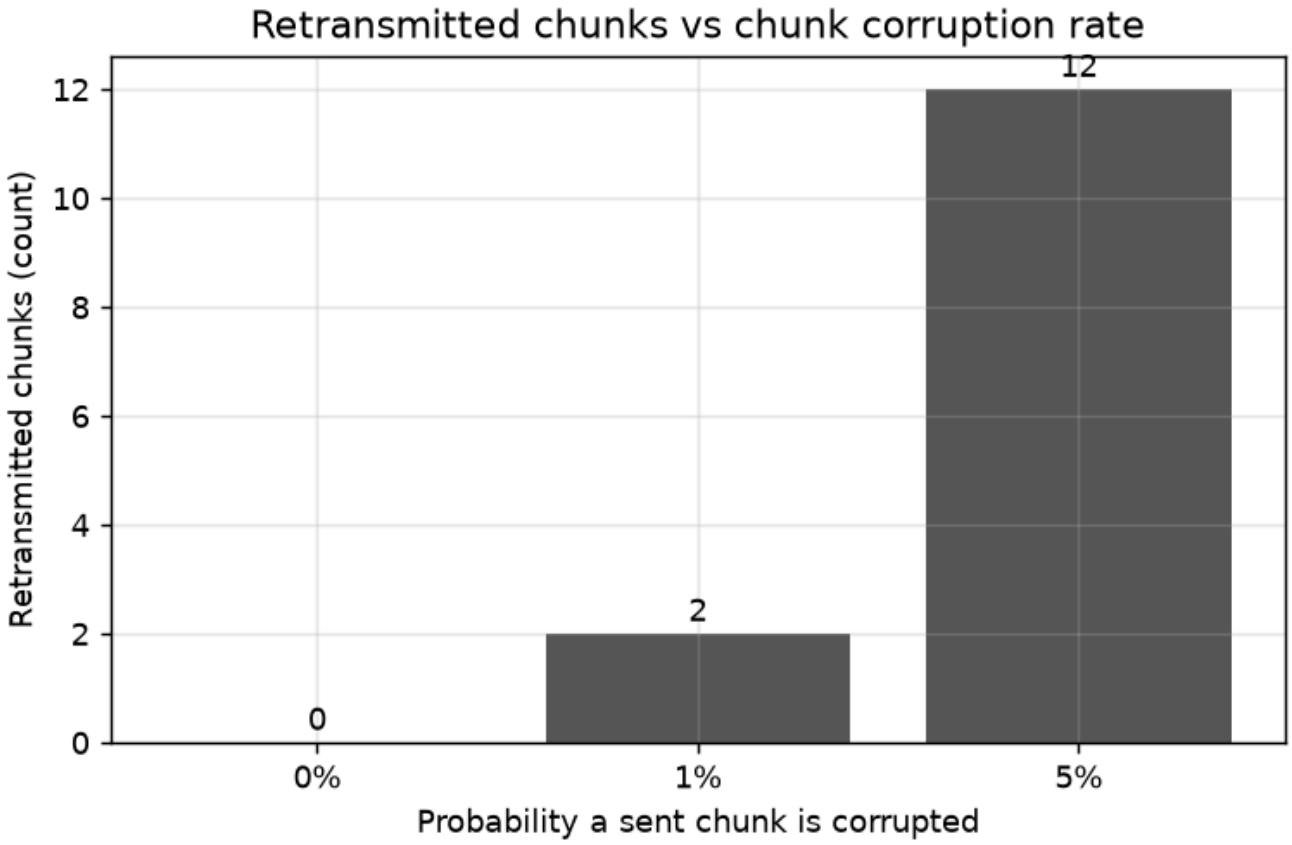
Retransmitted chunks vs chunk corruption rate
Retransmitted chunks (count)
0
2
4
6
8
10
12
0
2
12
0%
1%
5%
Probability a sent chunk is corrupted

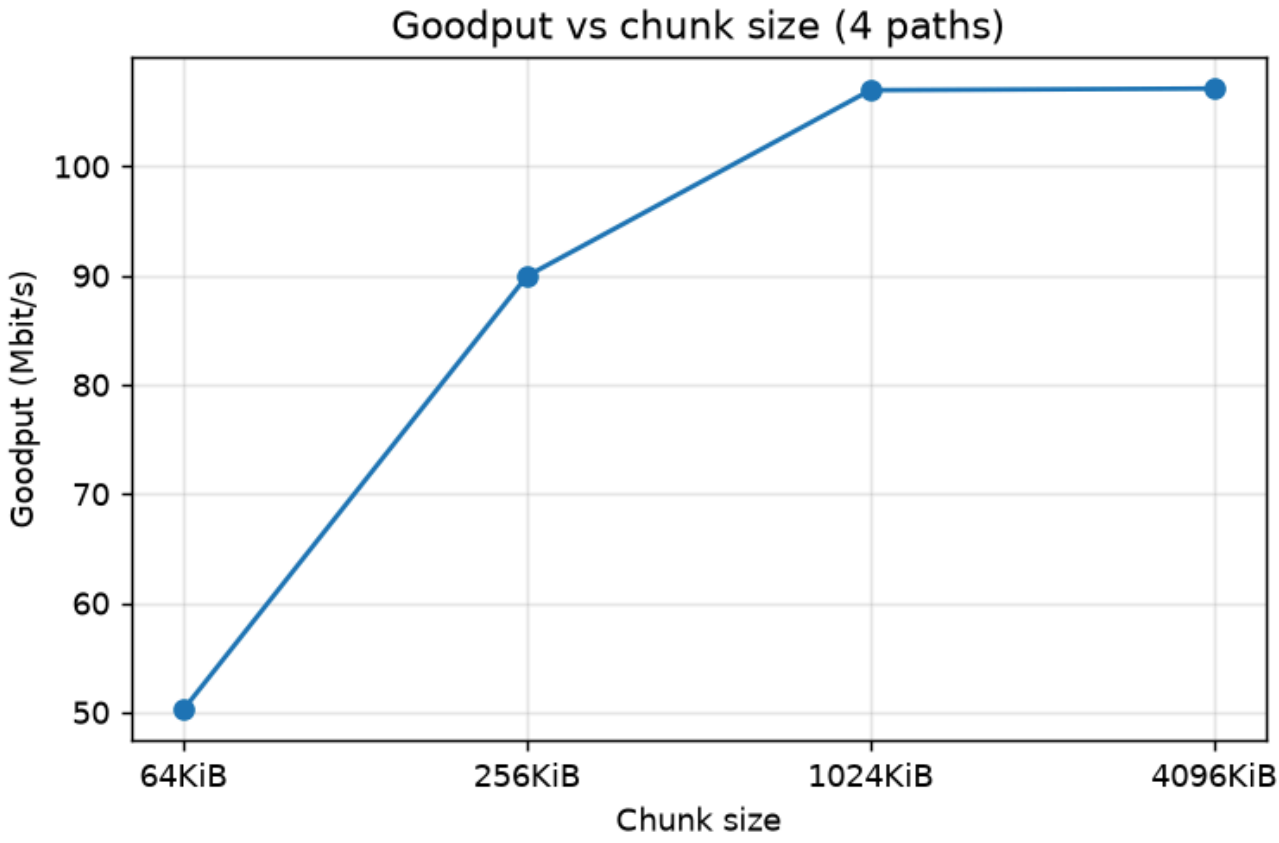
Goodput vs chunk size (4 paths)
Goodput (Mbit/s)
50
60
70
80
90
100
64KiB
256KiB
1024KiB
4096KiB
Chunk size

4. Analysis

- **Scaling.** Goodput roughly doubles with each doubling of paths (E1), because each path is limited by its own rate and round trips, not by the CPU. One 40 Mbit/s path reaches only 23 Mbit/s: the protocol keeps one chunk in flight per path and waits for the ACK, so every chunk costs transmit time plus a round trip. A sliding window per path would fix this but was left out to keep the protocol explainable.
- **Work stealing works** without measuring anything (E2, E3): the slow path simply returns to the queue less often. Total time still falls short of the sum of link rates because of the per-chunk round trip above and the tail at the end, when the last chunk sits on a slow path.
- **Failure handling** (E4): losing one of three paths cost about 2.3 s of extra transfer time, which is the lost capacity, not recovery delay. The in-flight chunk was resent immediately (0.15 s).
- **Corruption** (E5): corrupted chunks were caught by SHA-256 on every run, and the cost was the retransmitted chunks only. Corruption here is injected by the sender per chunk, so the observed 1 % and 5 % are matched by 2 and 12 retransmissions out of 200.
- **Chunk size** (E6): 64 KiB loses half the throughput to per-chunk round trips; beyond 1 MiB there is no gain on this setup, while RTT per chunk and retransmit cost keep growing (mean chunk RTT 41 ms at 64 KiB, 1040 ms at 4 MiB).
- **Resume** (E7): the resumed run skipped the 80 chunks that were verified on disk.

5. Limits of this evidence


- Single machine, emulated paths, one run per setting; no confidence intervals.
- The emulator does not drop IP packets, so TCP-level loss behaviour is not tested.
- No multi-machine run was done; the Wireshark capture is described in section 6.

Update: scenarios, role-specific views, graph axis


`tests/e2e/test_scenarios.py` (3 tests): sender and receiver pages differ (title, banner, panel order, Download only on the receiver); a 2 MB transfer gets a millisecond axis with at least 5 throughput points; the slow-WAN scenario succeeds; the total-failure scenario shows "Not delivered" on the sender, "Nothing was saved" on the receiver and no file on disk. Result: 25 e2e tests and 50 unit tests pass.

6. Wireshark captures


Captured on `lo0` during a 60 MB transfer over three emulated paths; the third path was killed at about 6 s. Decoded with `wireshark/mpft.lua`. Text extracts of the same capture are in `WIRESHARK_EVIDENCE.md`.

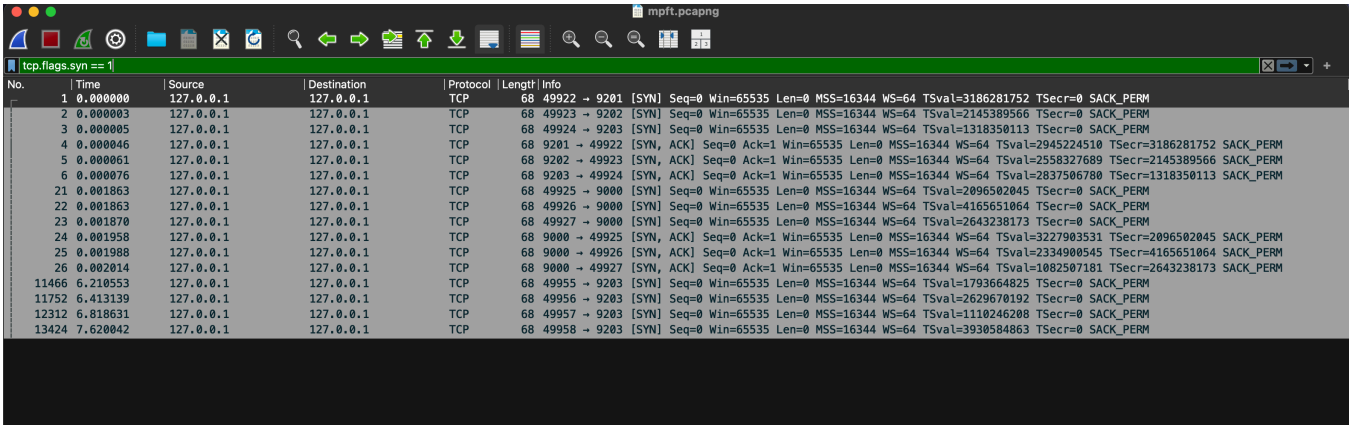


Three SYN / SYN-ACK pairs on ports 9201, 9202, 9203 (sender to emulator) and three on port 9000 (emulator to receiver). The later SYNs to 9203 are the sender's reconnect attempts after the path was killed.

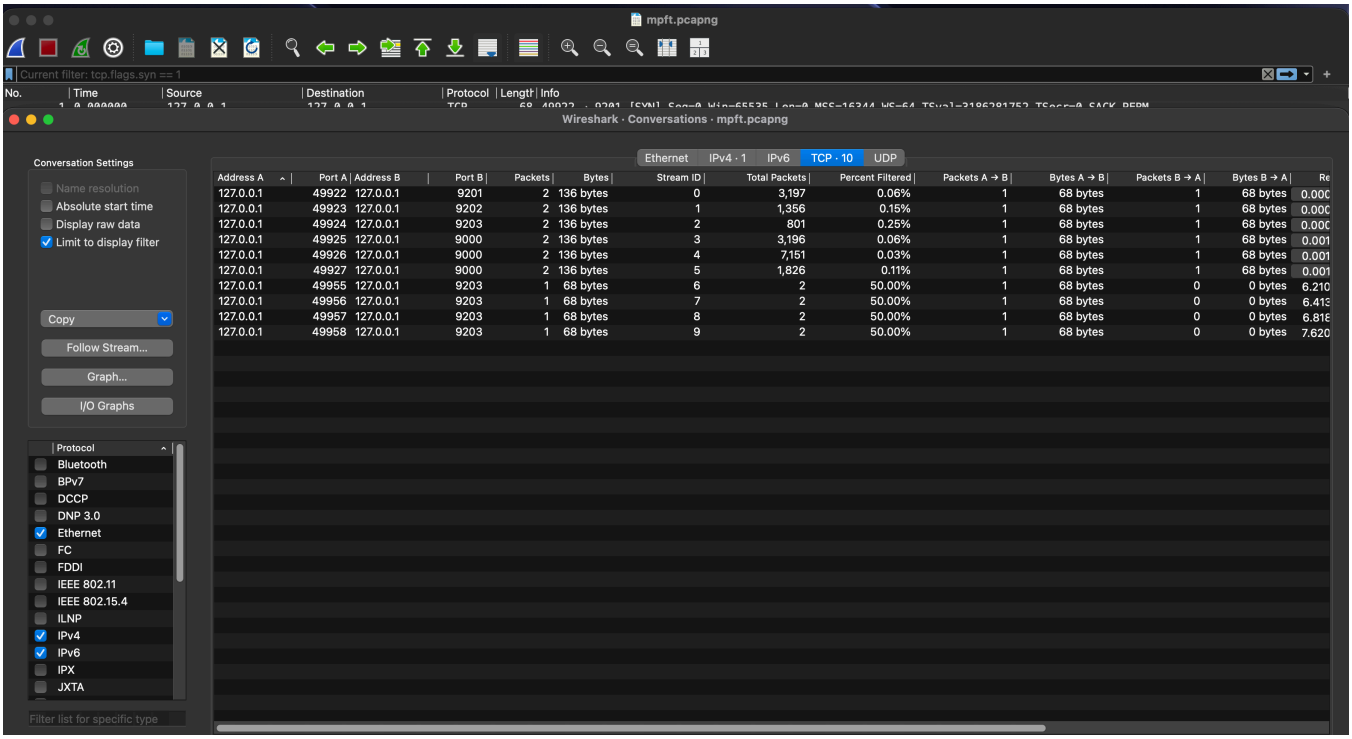


One conversation per path. The 9201 and 9202 paths carry much more data than 9203; the four later 9203 rows are refused reconnects (one SYN, no reply data).

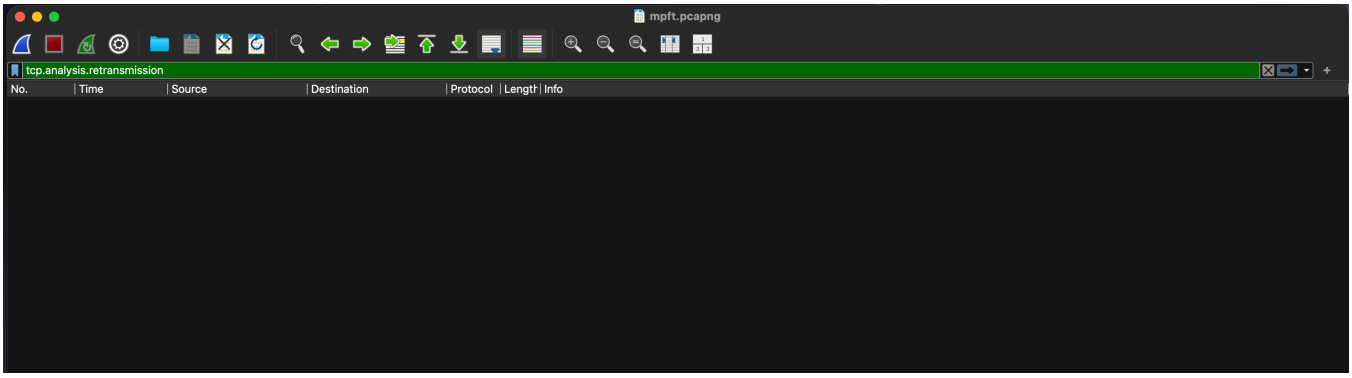


`tcp.analysis.retransmission` matches nothing: loopback does not lose packets. Chunk retransmissions happen at the MPFT layer and are not TCP retransmissions.

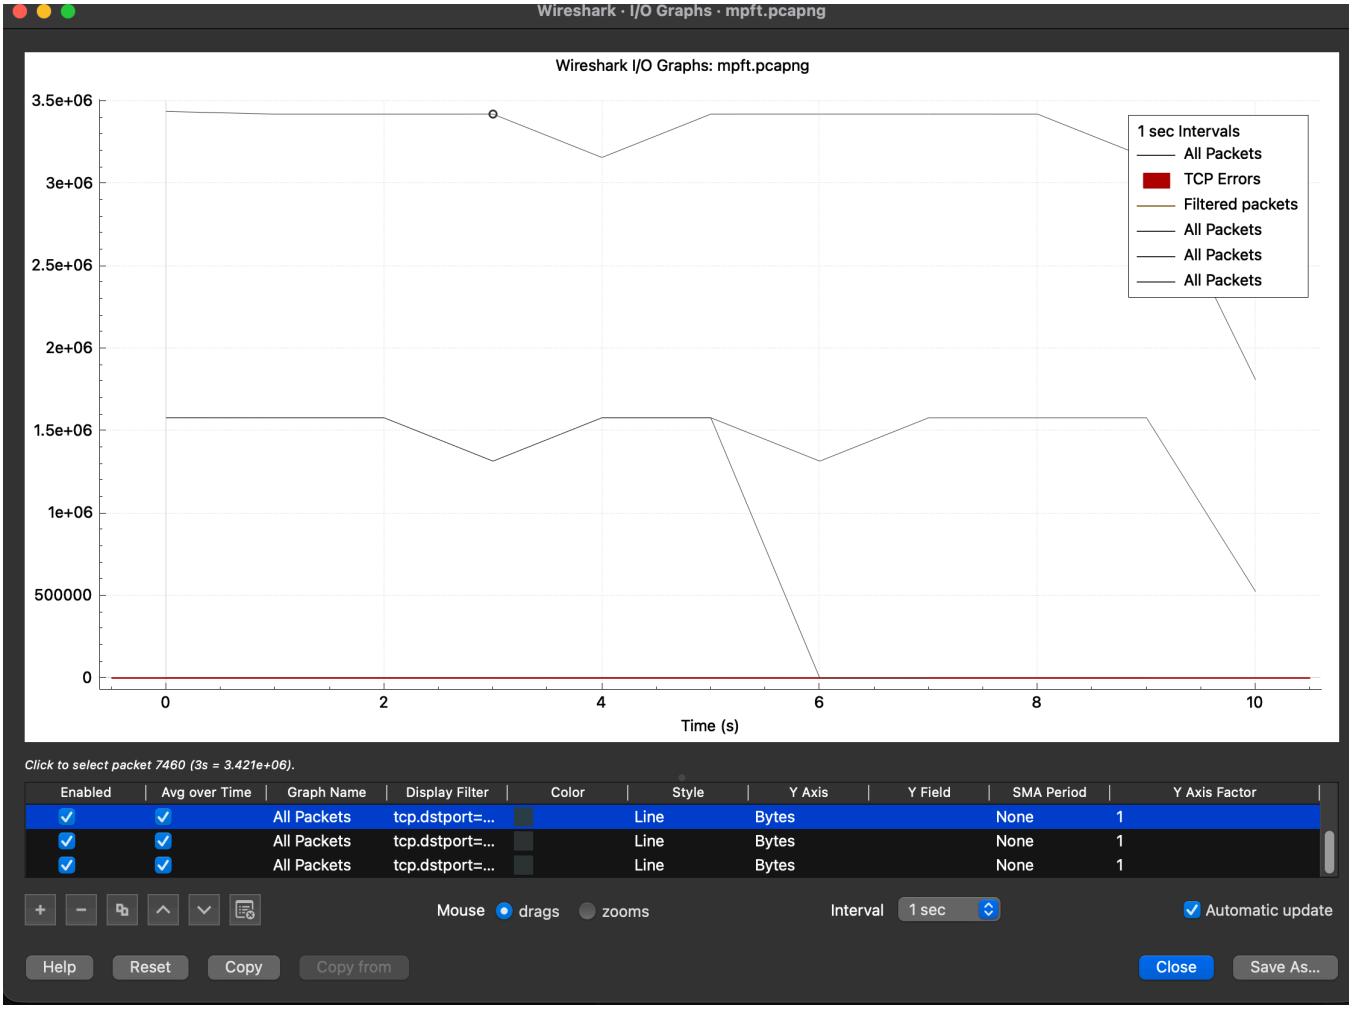


I/O graph in bytes per second, one line per destination port. The 9203 line falls to zero at 6 s while the other two continue.

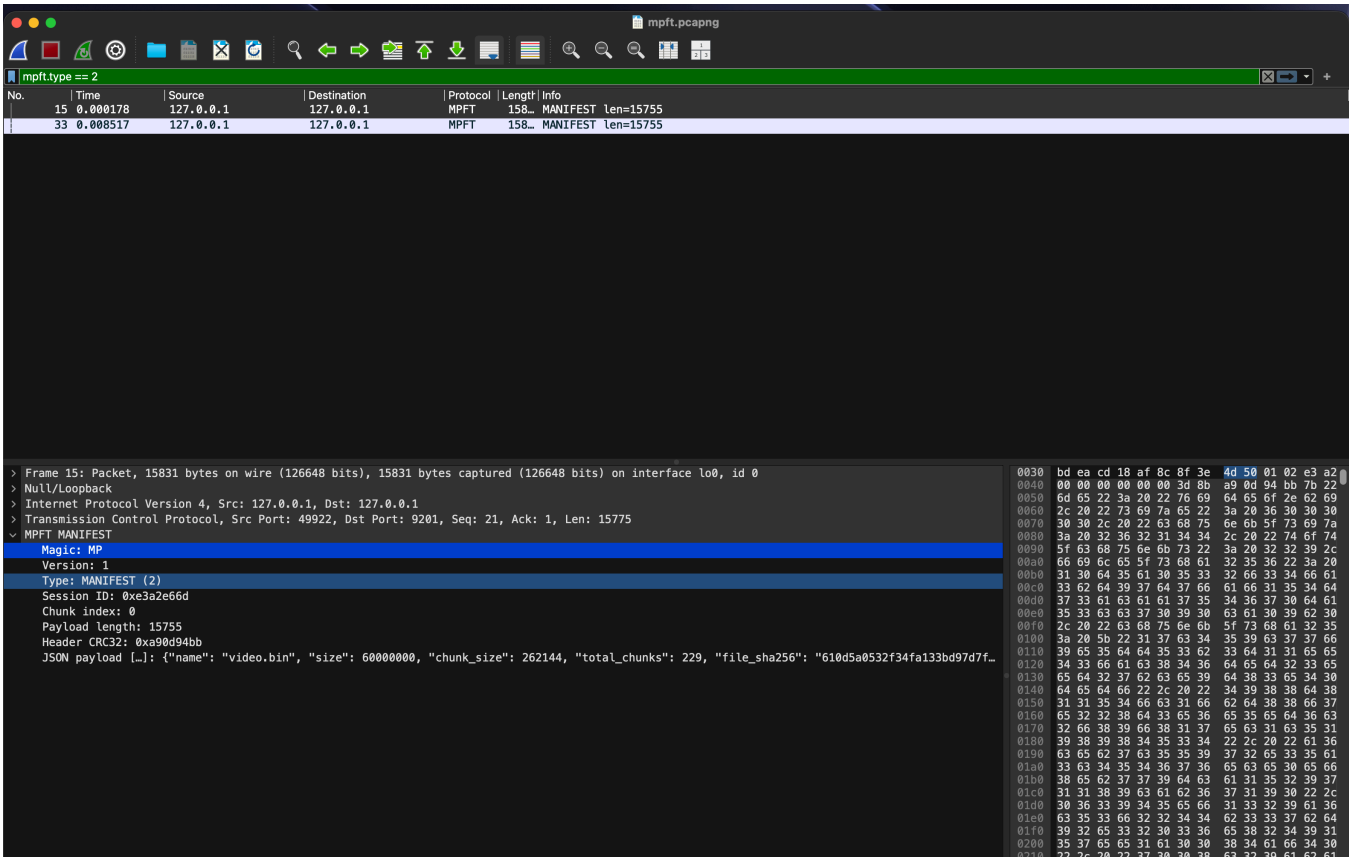

MANIFEST: magic MP, version 1, type 2, session id, payload length 15755 and the JSON (name, size, chunk size, total chunks, SHA-256).

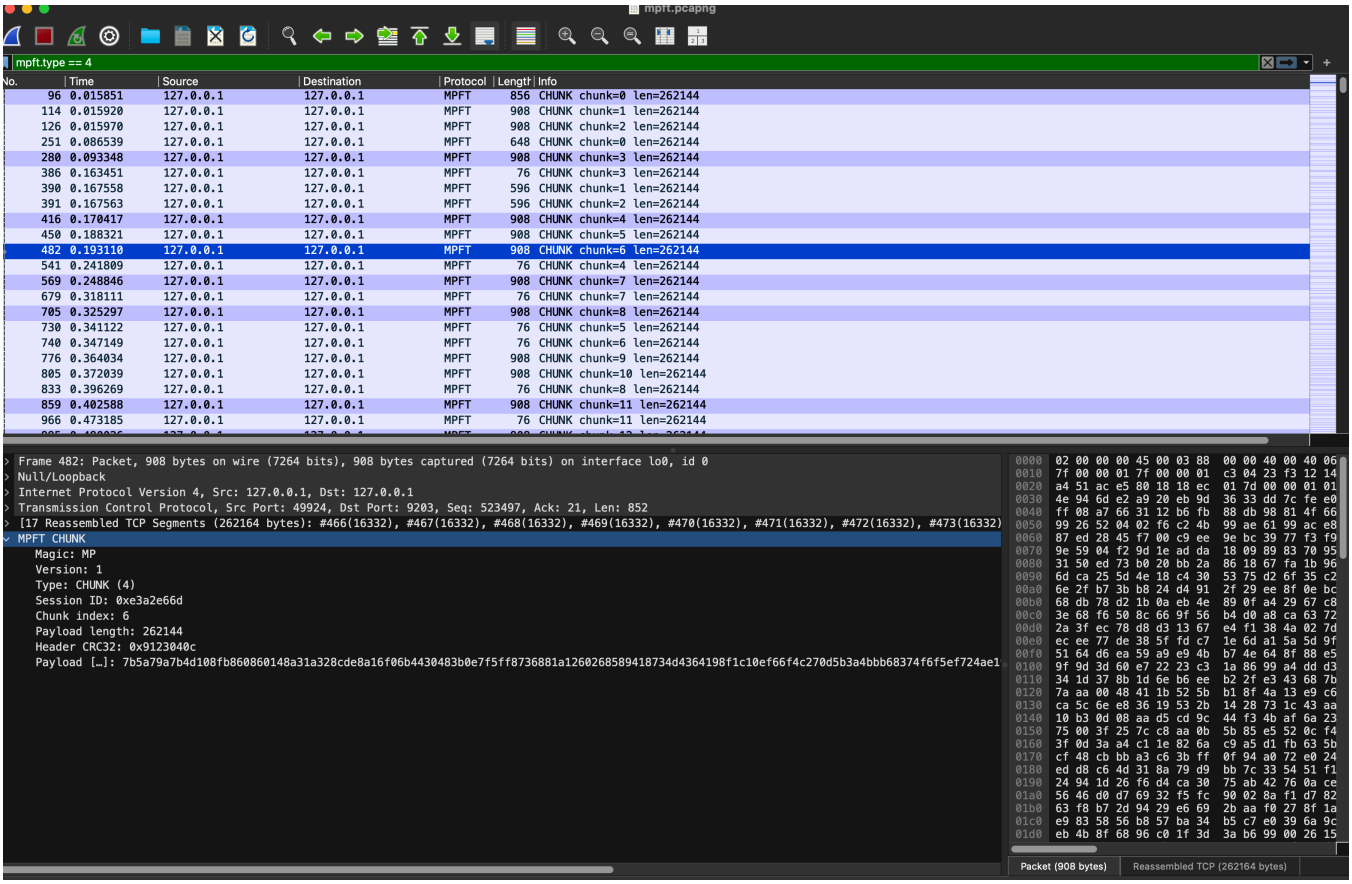

CHUNK 6: type 4, session id, chunk index 6, payload length 262144, header CRC32 and the raw payload.

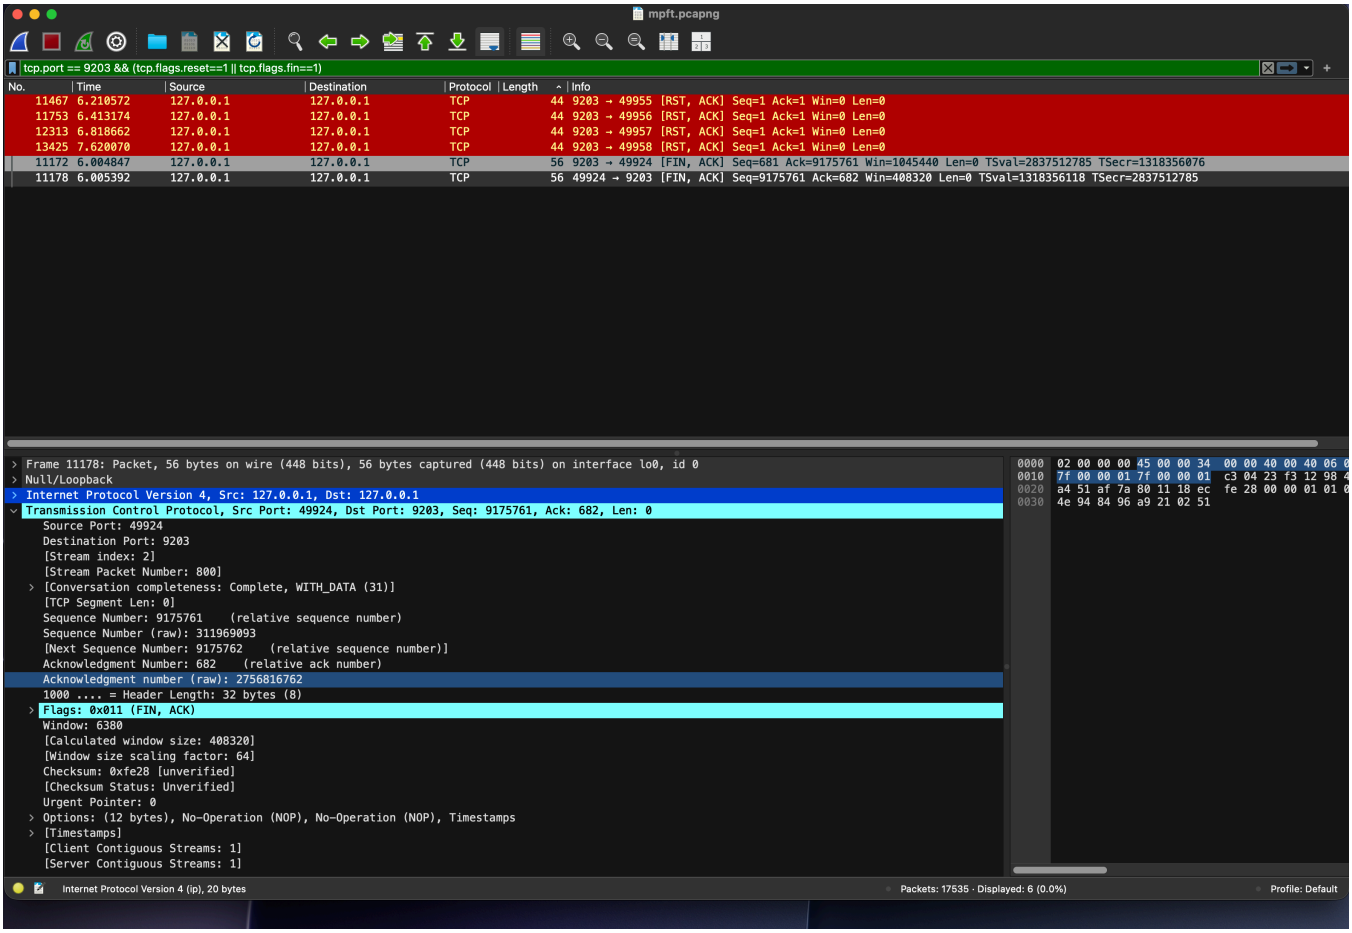

FIN/ACK exchange on port 9203 at 6.0 s when the emulator closes the path, followed by RST,ACK replies to the sender's reconnect attempts (connection refused).