


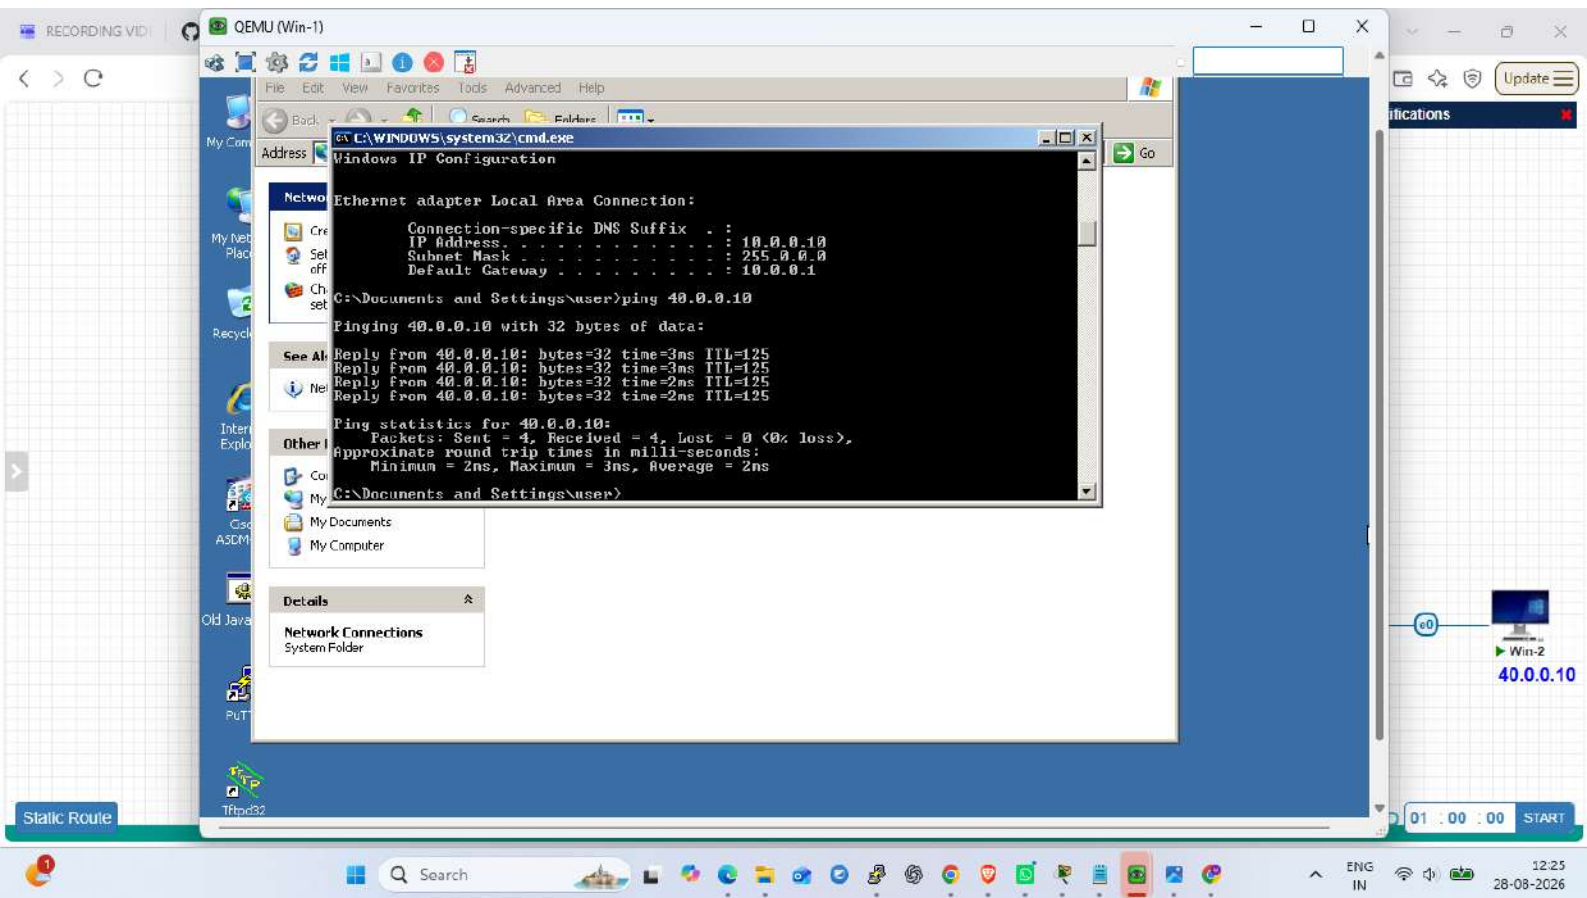

```
R3
R3(config-if)#no sh
R3(config-if)#exit
R3(config)#int e 0/0
R3(config-if)#ip add 40.0.0.0 255.0.0.0
Bad mask /8 for address 40.0.0.0
R3(config-if)#no ip add 40.0.0.0 255.0.0.0
Bad mask /8 for address 40.0.0.0
R3(config-if)#ip add 40.0.0.1 255.0.0.0
R3(config-if)#exit
R3(config)#exit
R3#p
*Aug 28 06:52:12.839: %SYS-5-CONFIG_I: Configured from console by console
R3#p 40.0.0.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 40.0.0.10, timeout is 2 seconds:
.!!!!
Success rate is 80 percent (4/5), round-trip min/avg/max = 1/1/1 ms
R3#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 30.0.0.1
S    20.0.0.0/8 [1/0] via 30.0.0.1
S    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     30.0.0.0/8 is directly connected, Ethernet0/1
L     30.0.0.2/32 is directly connected, Ethernet0/1
L     40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     40.0.0.0/8 is directly connected, Ethernet0/0
L     40.0.0.1/32 is directly connected, Ethernet0/0
R3#sh ip int br
Interface      IP-Address      OK? Method Status      Protocol
Ethernet0/0    40.0.0.1        YES manual up          up
Ethernet0/1    30.0.0.2        YES manual up          up
Ethernet0/2    unassigned      YES TFTP  down        down
Ethernet0/3    unassigned      YES TFTP  down        down
R3#
R3#
```

```
R2
R2(config-if)#ip add 20.0.0.2 255.0.0.0
R2(config-if)#no sh
R2(config-if)#exit
R2(config)#int e 0/1
R2(config-if)#ip add 30.0.0.1 255.0.0.0
R2(config-if)#no sh
R2(config-if)#exit
R2(config)#ip route 40.0.0.0 255.0.0.0 30.0.0.2
R2(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.1
R2(config)#exit
R2#
*Aug 28 06:46:03.701: %SYS-5-CONFIG_I: Configured from console by console
R2#
*Aug 28 06:46:23.783: %PWP-6-PWP_DISCOVERY_STOPPED: PwP Discovery stopped (Config Wizard)
R2#sh ip int br
Interface          IP-Address      OK? Method Status      Protocol
Ethernet0/0        20.0.0.2        YES manual up          up
Ethernet0/1        30.0.0.1        YES manual up          up
Ethernet0/2        unassigned      YES TFTP  down        down
Ethernet0/3        unassigned      YES TFTP  down        down
R2#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       +- - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 20.0.0.1
    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Ethernet0/0
L    20.0.0.2/32 is directly connected, Ethernet0/0
    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    30.0.0.0/8 is directly connected, Ethernet0/1
L    30.0.0.1/32 is directly connected, Ethernet0/1
S    40.0.0.0/8 [1/0] via 30.0.0.2
R2#
R2#
R2#
R2#
```

```
R1
R1(config)#int e 0/1
R1(config-if)#ip add 20.0.0.1 255.0.0.0
R1(config-if)#no sh
R1(config-if)#exit
R1(config)#ip route 30.0.0.0 255.0.0.0 20.0.0.2
R1(config)#ip route 40.0.0.0 255.0.0.0 20.0.0.2
R1(config)#
R1(config)#
R1(config)#
R1(config)#exit
R1#
*Aug 28 06:43:33.833: %SYS-5-CONFIG_I: Configured from console by console
R1#
*Aug 28 06:46:15.005: %PWP-6-PWP_DISCOVERY_STOPPED: PwP Discovery stopped (Config Wizard)
R1#sh ip int br
Interface                IP-Address      OK? Method Status      Protocol
Ethernet0/0              10.0.0.1        YES manual  up          up
Ethernet0/1              20.0.0.1        YES manual  up          up
Ethernet0/2              unassigned      YES TFTP   down        down
Ethernet0/3              unassigned      YES TFTP   down        down
R1#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/8 is directly connected, Ethernet0/0
L       10.0.0.1/32 is directly connected, Ethernet0/0
L       20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       20.0.0.0/8 is directly connected, Ethernet0/1
L       20.0.0.1/32 is directly connected, Ethernet0/1
S       30.0.0.0/8 [1/0] via 20.0.0.2
S       40.0.0.0/8 [1/0] via 20.0.0.2
R1#
R1#
R1#
R1#
```

