

QEMU (Win2)

C:\WINDOWS\system32\cmd.exe

Active Routes:

Network Destination	Netmask	Gateway	Interface	Metric
0.0.0.0	0.0.0.0	60.0.0.1	60.0.0.10	10
60.0.0.0	255.0.0.0	60.0.0.10	60.0.0.10	10
60.0.0.10	255.255.255.255	127.0.0.1	127.0.0.1	10
60.255.255.255	255.255.255.255	60.0.0.10	60.0.0.10	10
127.0.0.0	255.0.0.0	127.0.0.1	127.0.0.1	1
224.0.0.0	240.0.0.0	60.0.0.10	60.0.0.10	10
255.255.255.255	255.255.255.255	60.0.0.10	60.0.0.10	1

*Default Gateway: 60.0.0.1

Persistent Routes:

None

C:\Documents and Settings\user>ping 50.0.0.10

Pinging 50.0.0.10 with 32 bytes of data:

Reply from 50.0.0.10: bytes=32 time=1ms TTL=127

Reply from 50.0.0.10: bytes=32 time=1ms TTL=127

Reply from 50.0.0.10: bytes=32 time=2ms TTL=127

Reply from 50.0.0.10: bytes=32 time=1ms TTL=127

Ping statistics for 50.0.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>

```
QEMU (Win1)
Ethernet adapter Local Area Connection:
    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 50.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 50.0.0.1

C:\Documents and Settings\user>route print

Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 fe 9c 09 4f 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet Scheduler Miniport

Active Routes:
Network Destination  Netmask          Gateway          Interface        Metric
0.0.0.0              0.0.0.0          50.0.0.1        50.0.0.10        10
50.0.0.0            255.0.0.0        50.0.0.10        50.0.0.10        10
50.0.0.10          255.255.255.255  127.0.0.1        127.0.0.1         10
50.255.255.255     255.255.255.255  50.0.0.10        50.0.0.10         10
127.0.0.0           255.0.0.0        127.0.0.1        127.0.0.1          1
224.0.0.0           240.0.0.0        50.0.0.10        50.0.0.10         10
255.255.255.255    255.255.255.255  50.0.0.10        50.0.0.10          1
Default Gateway:    50.0.0.1

Persistent Routes:
    None

C:\Documents and Settings\user>ping 60.0.0.10

Pinging 60.0.0.10 with 32 bytes of data:

Reply from 60.0.0.10: bytes=32 time=4ms TTL=127
Reply from 60.0.0.10: bytes=32 time=2ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127

Ping statistics for 60.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 4ms, Average = 2ms

C:\Documents and Settings\user>
```

Notifications

01 : 00 : 00 START

```
Router
Router(config)#int e 0/0
Router(config-if)#ip add 50.0.0.1
% Incomplete command.

Router(config-if)#ip add 50.0.0.1 255.0.0.0
Router(config-if)#no sh
Router(config-if)#exit
Router(config)#int e 0/1
Router(config-if)#ip add 60.0.0.1
% Incomplete command.

Router(config-if)#ip add 60.0.0.1 255.0.0.0
Router(config-if)#no sh
Router(config-if)#exit
Router(config)#
*Aug 28 07:09:53.783: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
Router(config)#sh ip route
% Invalid input detected at '^' marker.

Router(config)#exit
Router#
*Aug 28 07:11:42.079: %SYS-5-CONFIG_I: Configured from console by console
Router#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, M - NHRP, I - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PBR

Gateway of last resort is not set

    50.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       50.0.0.0/8 is directly connected, Ethernet0/0
L       50.0.0.1/32 is directly connected, Ethernet0/0
C       60.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       60.0.0.0/8 is directly connected, Ethernet0/1
L       60.0.0.1/32 is directly connected, Ethernet0/1
Router#
Router#
Router#
```


RECORDING VIDEO | Notes/CCNA/SN | Untitled | PNETLab | To x | lrfag:File/PRACT | sakthirajamd/CC | Suren Network | RECORDING VIDEO | +

labs.surennetwork.com/legacy/topology

Update

Notifications

 **SUREN NETWORK**
PLAY WITH TECHNOLOGIES

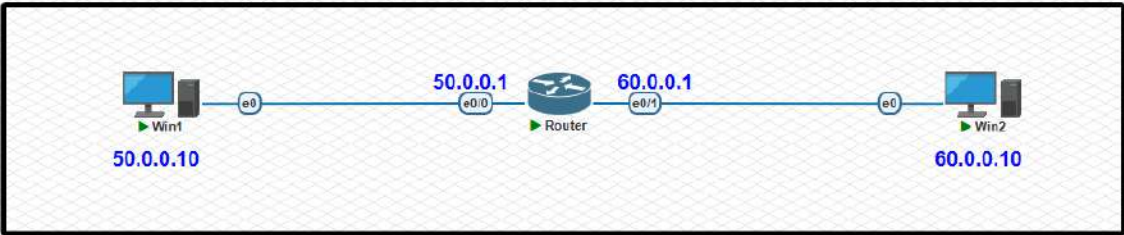

```
graph LR; Win1[Win1] --- e0((e0)) --- e0_0_1((50.0.0.1  
e0/0)) --- Router[Router] --- e0_0_1_1((60.0.0.1  
e0/1)) --- e0_2((e0)) --- Win2[Win2];
```

The diagram shows a network topology with two hosts, Win1 and Win2, connected via a central Router. Win1 is on the left with IP 50.0.0.10 and is connected to the Router's e0/0 interface (50.0.0.1). Win2 is on the right with IP 60.0.0.10 and is connected to the Router's e0/1 interface (60.0.0.1). The entire topology is enclosed in a black rectangular box.

Physical + - 01 : 00 : 00 START

