
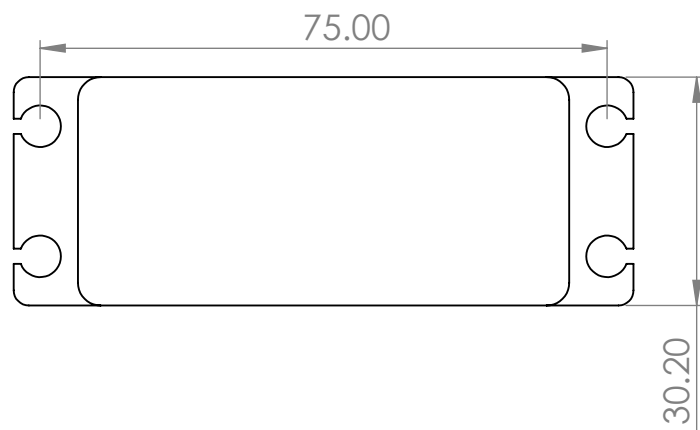
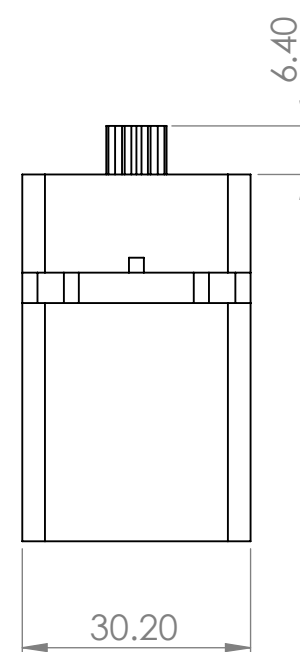


Technical drawing of a rectangular component. The drawing shows a top view with a central circular feature. Dimensions are indicated: a horizontal dimension of 78.00, a vertical dimension of 17.20, and a small horizontal dimension of 21.33.

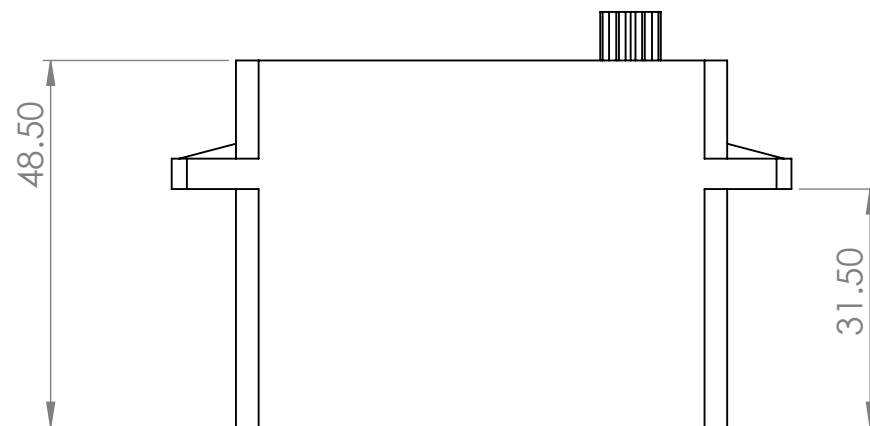

SI NO SE INDICA LO CONTRARIO: LAS COTAS SE EXPRESAN EN MM ACABADO SUPERFICIAL: TOLERANCIAS: LINEAL: ANGULAR:						Sakuta Resendez				SRC		NO CAMBIE LA ESCALA				REVISIÓN			
														Sakuta Robotics Company					
										TÍTULO:									
DIBUJ.										SERVO S135KC									
VERIF.																			
APROB.																			
FABR.																			
CALID.										MATERIAL:				N.º DE DIBUJO				A3	
										PESO:				ESCALA:1:1				HOJA 1 DE 1	

Item	Specification
Ideal Operating Temperature	-15 °C a 60 °C
Operating Voltage Range	10v – 12.4v

Item	Specification
Size	82 x 30.5 x 54.6 mm
Weight	168g
Material	Metal gear, plastic case, Aluminum case

Operating Voltage	10v a 12.4v
Idle Current (at stopped)	55 mA
Stall current (at locked)	8 A – 12 A

Item	Specification
Control System	PWM
Pulse Width Range	500 – 2500 usec
Neutral Position	1500 usec
Running degree	180 (when 500 – 2500 usec)
Dead band Width	3 sec
Operating frequency	50-330 Hz