



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.26	阿树


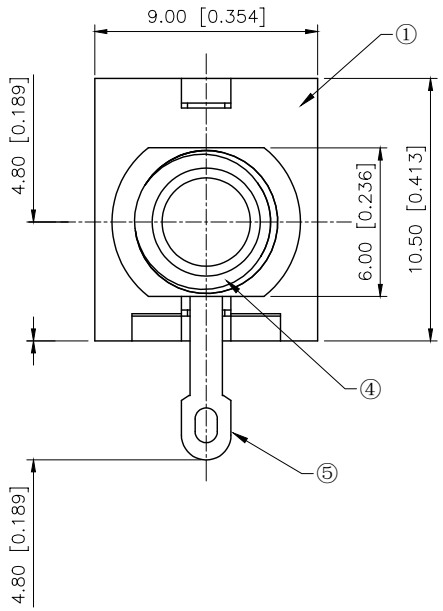


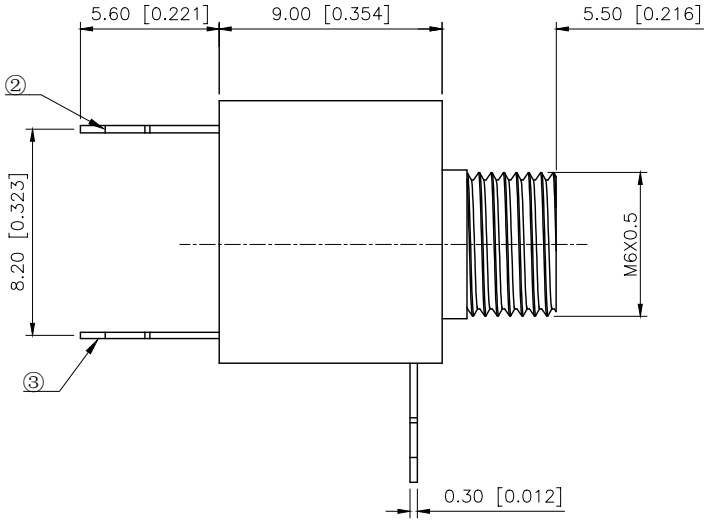

Voltage rating:30V AC/DC
额定电压:30V AC/DC
Current rating:0.5A
额定电流：0.5A
Contact resistance:≤30mΩ
接触电阻：≤30mΩ
Withstanding voltage:≥500V AC/minute
耐压：≥500VC/分钟
insertion and extraction force：3-20N
插拔力：3-20N
Temperature range:-30℃-+70℃
使用温度：-30℃-+70℃
Life:5000
寿命：5000

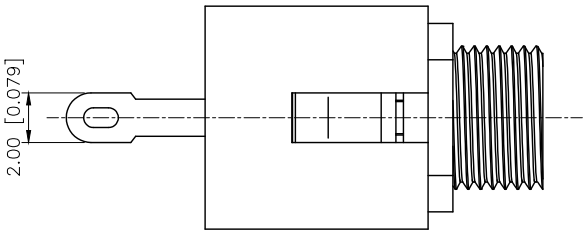

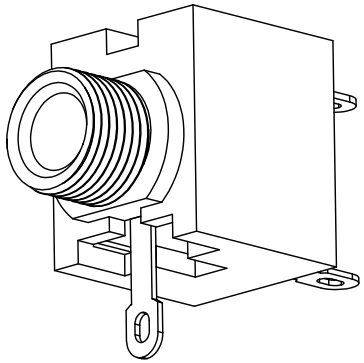

Model No.	PJ-301M-2	PJ-301M-3
DIA	NON-THREAD	
	ø6.0	
Schematic		
Color	B:black Y:yellow	

Plastic	PA	
Terminal 5	Brass	Tin
Terminal 4	Phosphor Bronze	Tin
Terminal 3	Brass	Tin
Terminal 2	Brass	Tin
PAPT NAMF	MATERIAL	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB 星坤 Connection

DESIGN	阿树	VIEW:	MODEL TYPE: 3.5 PHONE JACK
CHECKED		UNIT: mm/in	PART NO.: PJ-301M-3-B
APPROVED		SIZE: A4	DWG NO.: X-PJ-301M-3-B

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1