




FRONT ELEVATION

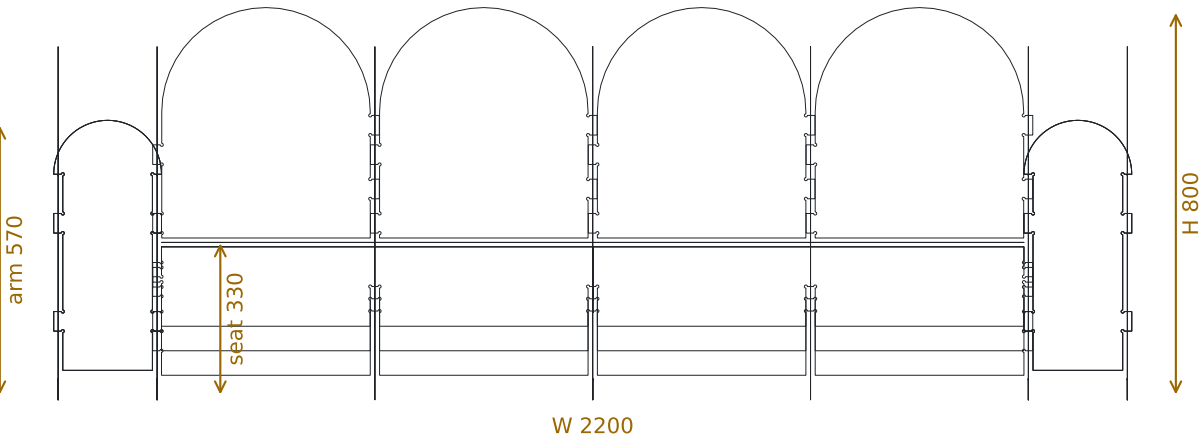

SIDE (from the left)

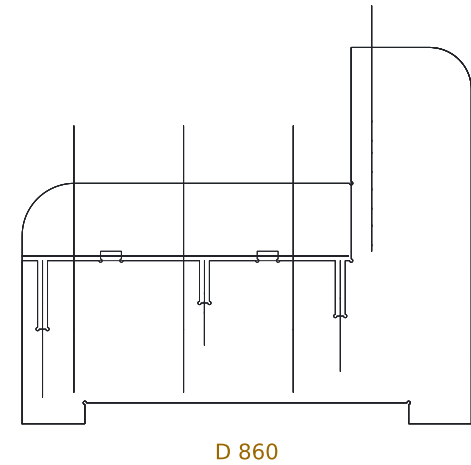

PLAN

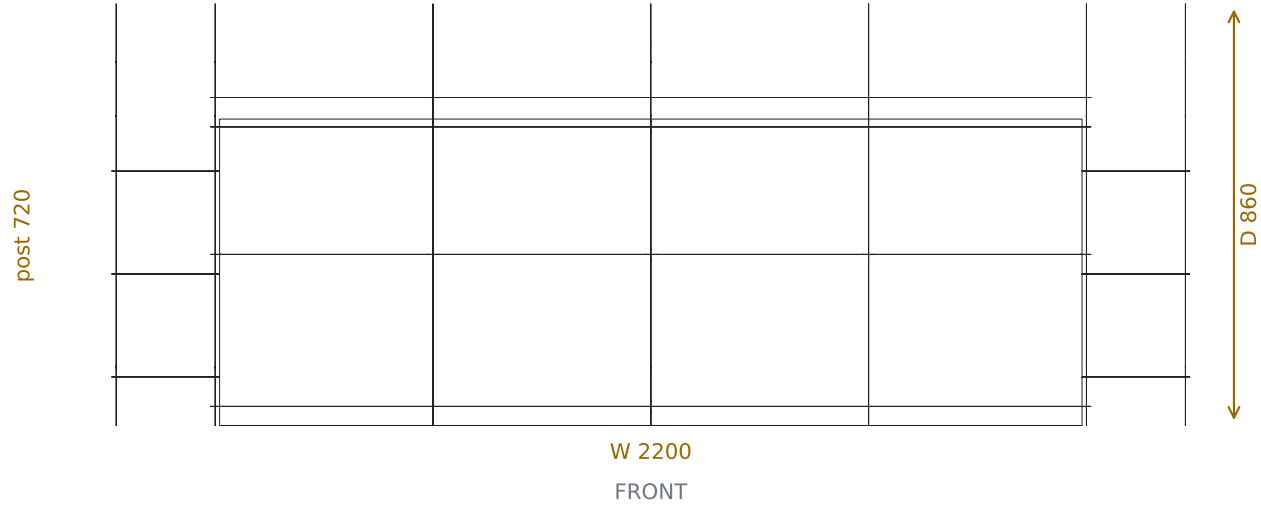

All dimensions mm. Overall dimensions are DESIGN CHOICES (unconfirmed) - see 05_DATA/parameters.json. Board 18 mm NOMINAL.

LENA SOFA / PARAMETERS

every value with its provenance status

PARAMETER	VALUE	UNIT	STATUS	NOTE
MATERIAL	MDF		USER_CONFIRMED	user works in MDF; birch plywood also suitable
MATERIAL_THICKNESS	18	mm	USER_CONFIRMED	NOMINAL - measure the real sheet before cutting
CLEARANCE	1	mm	ADOPTED_FROM_TOKYO_PACK	total across each slot - UNTESTED FIT
SLOT_WIDTH	19	mm	DERIVED	MATERIAL_THICKNESS + CLEARANCE
TAB_LENGTH	40	mm	ADOPTED_FROM_TOKYO_PACK	
MORTISE_LENGTH	41	mm	DERIVED	TAB_LENGTH + CLEARANCE
SLOT_DEPTH	18	mm	DERIVED	through-mortises; rail halvings to mid-height
CNC_BIT_DIAMETER	6	mm	ASSUMED_USER_INPUT_REQUIRED	sizes every dogbone relief
RELIEF_RADIUS	3.2	mm	DERIVED	CNC_BIT_DIAMETER / 2 + 0.2
KERF_COMPENSATION		mm	UNKNOWN	apply the tool-radius offset in CAM; the DXF is net
SHEET_SIZE	2440 x 1220	mm	ASSUMED_USER_INPUT_REQUIRED	standard sheet; confirm the supplier size
PART_GAP	10	mm	ADOPTED_FROM_TOKYO_PACK	
SHEET_EDGE	9	mm	ADOPTED_FROM_TOKYO_PACK	clamping margin
WIDTH	2200	mm	DESIGN_CHOICE_UNCONFIRMED	outer arm face to outer arm face
DEPTH	860	mm	DESIGN_CHOICE_UNCONFIRMED	frame; + back foam
HEIGHT	800	mm	DESIGN_CHOICE_UNCONFIRMED	arch crowns; + 40~50 mm back cushion
SEAT_FRAME_HEIGHT	330	mm	DESIGN_CHOICE_UNCONFIRMED	deck top; + 120~140 mm seat cushion = ~450
ARM_HEIGHT	570	mm	DESIGN_CHOICE_UNCONFIRMED	top of the drum (spacer caps)
ARM_WIDTH	220	mm	DESIGN_CHOICE_UNCONFIRMED	
SEAT_BAYS	4		DESIGN_CHOICE_UNCONFIRMED	one arch per bay, 426.5 mm clear each
POST_HEIGHT	720	mm	DESIGN_CHOICE_UNCONFIRMED	rib / arm post tops behind the arches
PLINTH_RECESS	40	mm	DESIGN_CHOICE_UNCONFIRMED	between 120 mm feet front and back
GRAIN_DIRECTION			DERIVED	not applicable to MDF; for plywood, run rail grain a