



PEBBLE SOFA / ASSEMBLY GUIDE

frame only - upholstery is outside this pack

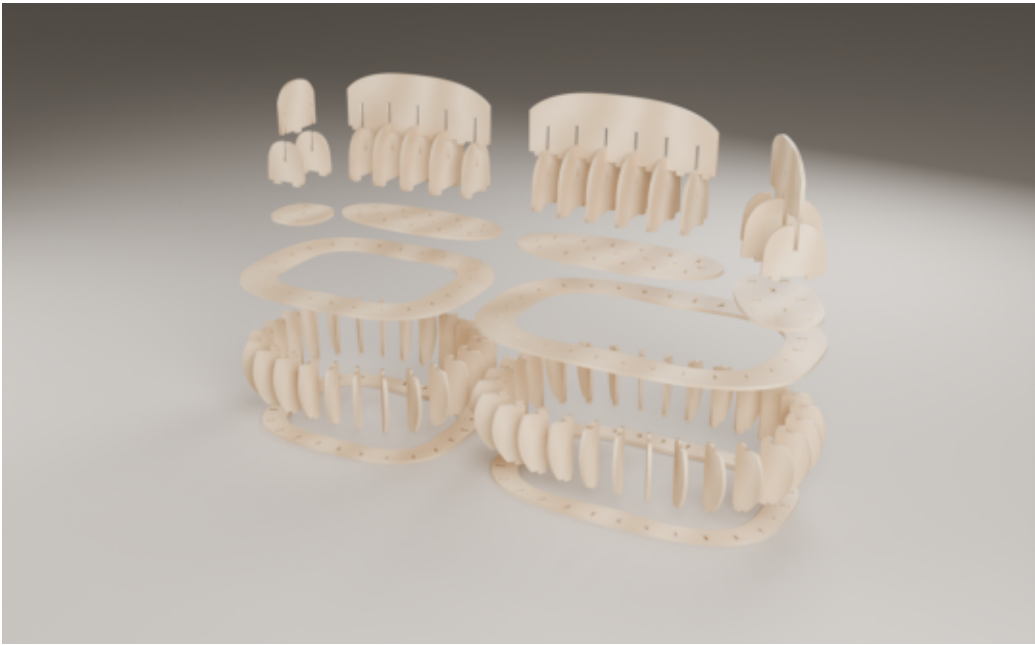

PEBBLE SOFA / STEP 01 - Base rings


Lay BASE-RING-L and BASE-RING-R on a level floor, mortises up, about 70 mm apart (left module on the left).

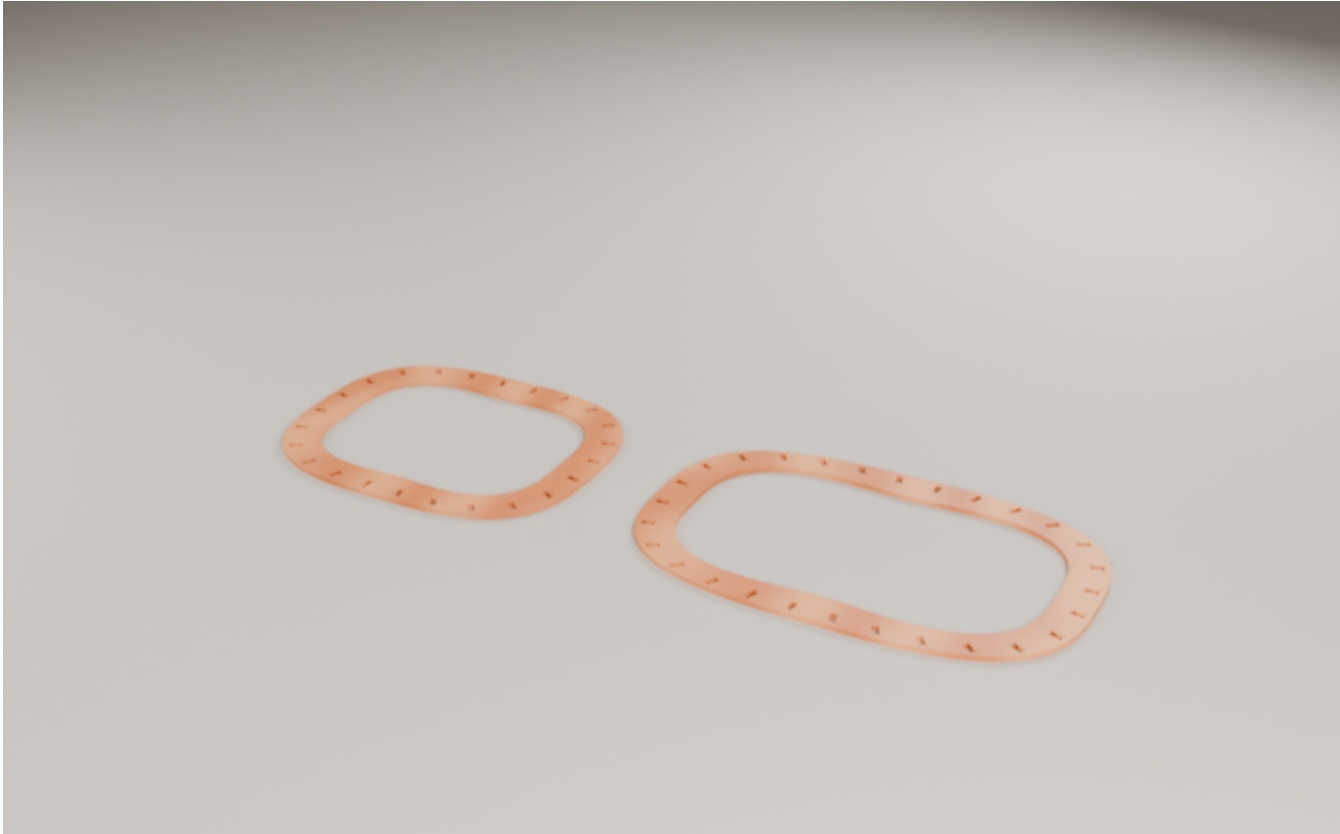

New parts are shown in terracotta, a few cm before they slide into place along their tabs.

PEBBLE SOFA / STEP 02 - Body ribs


Stand the body ribs in the base mortises, bulge outward. The letter (RIB-LA, LB ... / RA ...) gives the place: see the parts list angles.

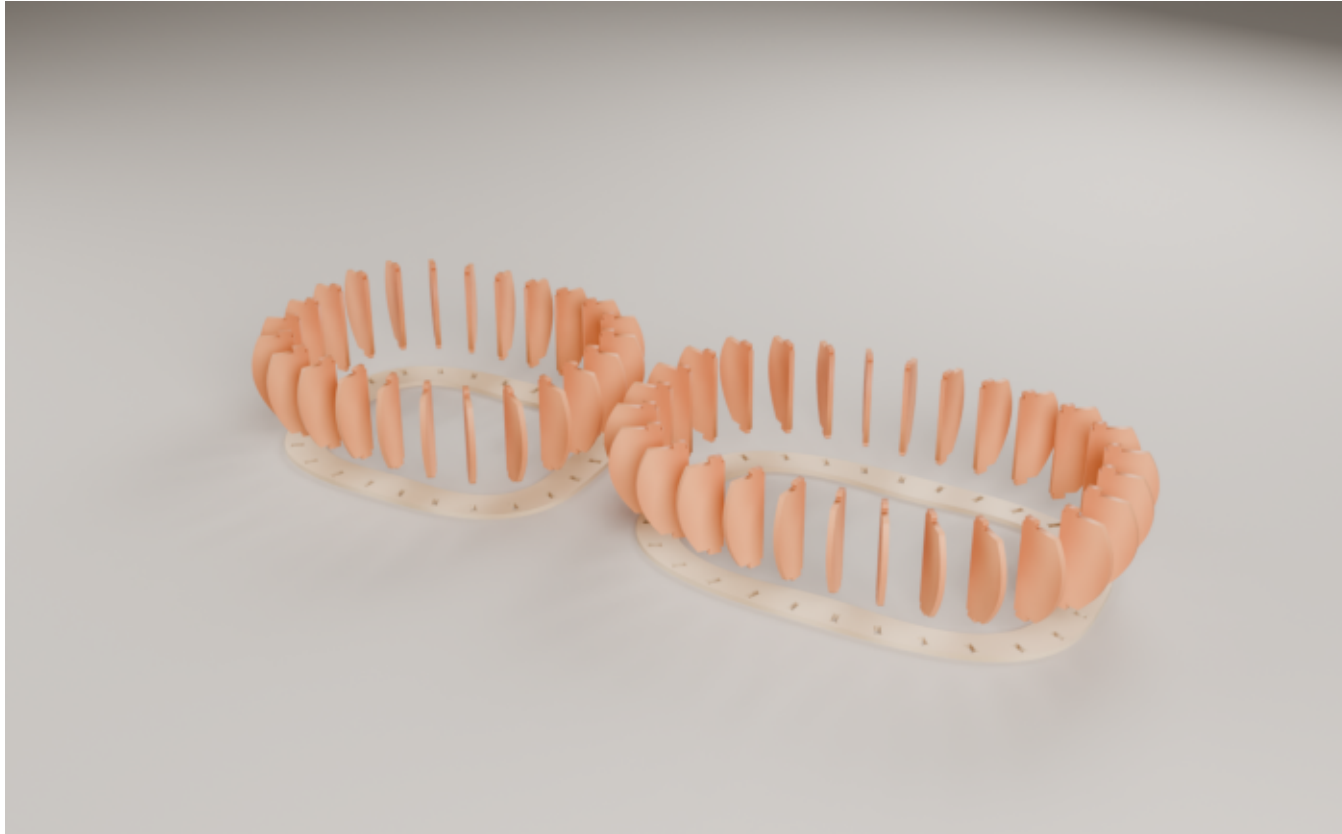

New parts are shown in terracotta, a few cm before they slide into place along their tabs.

PEBBLE SOFA / STEP 03 - Seat rings


Lower SEAT-RING-L / R onto the rib top tabs. Then stretch elastic webbing across each opening (staples).

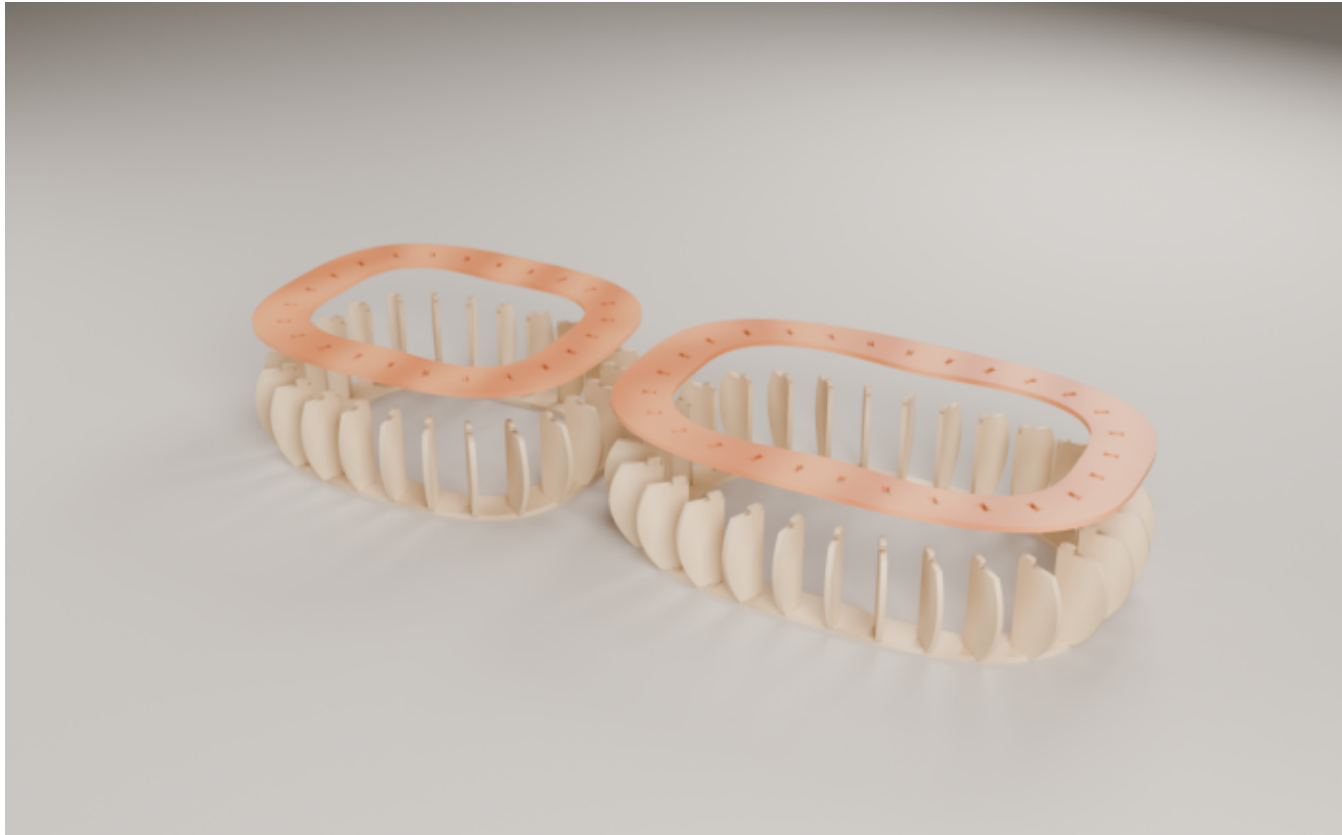

New parts are shown in terracotta, a few cm before they slide into place along their tabs.

PEBBLE SOFA / STEP 04 - Pebble plates


Place the four pebble plates (BL, EL, BR, AR) on the seat rings at their marked spots, glue and screw them from below through the ring.

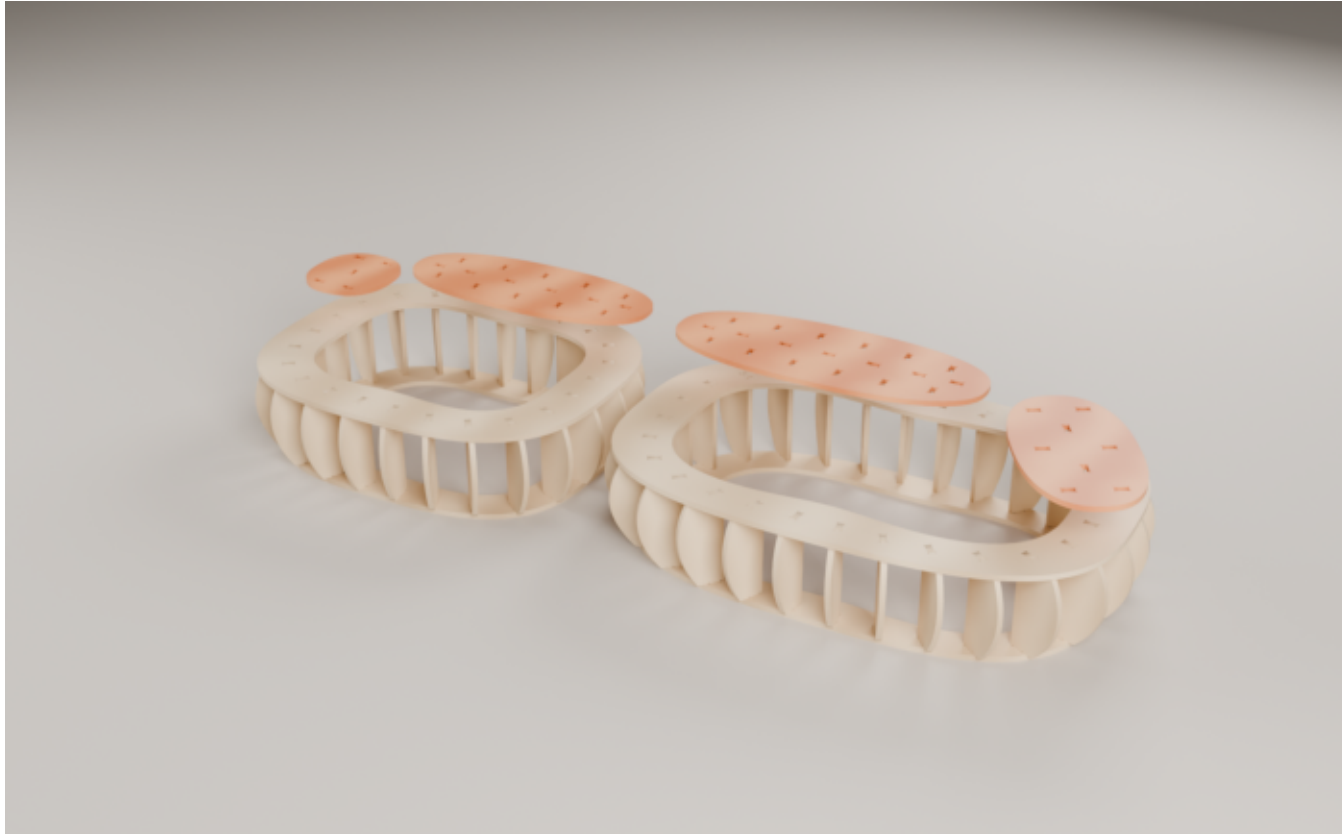

New parts are shown in terracotta, a few cm before they slide into place along their tabs.

PEBBLE SOFA / STEP 05 - Pebble ribs

Stand each pebble's ribs in its plate mortises, slots facing up.

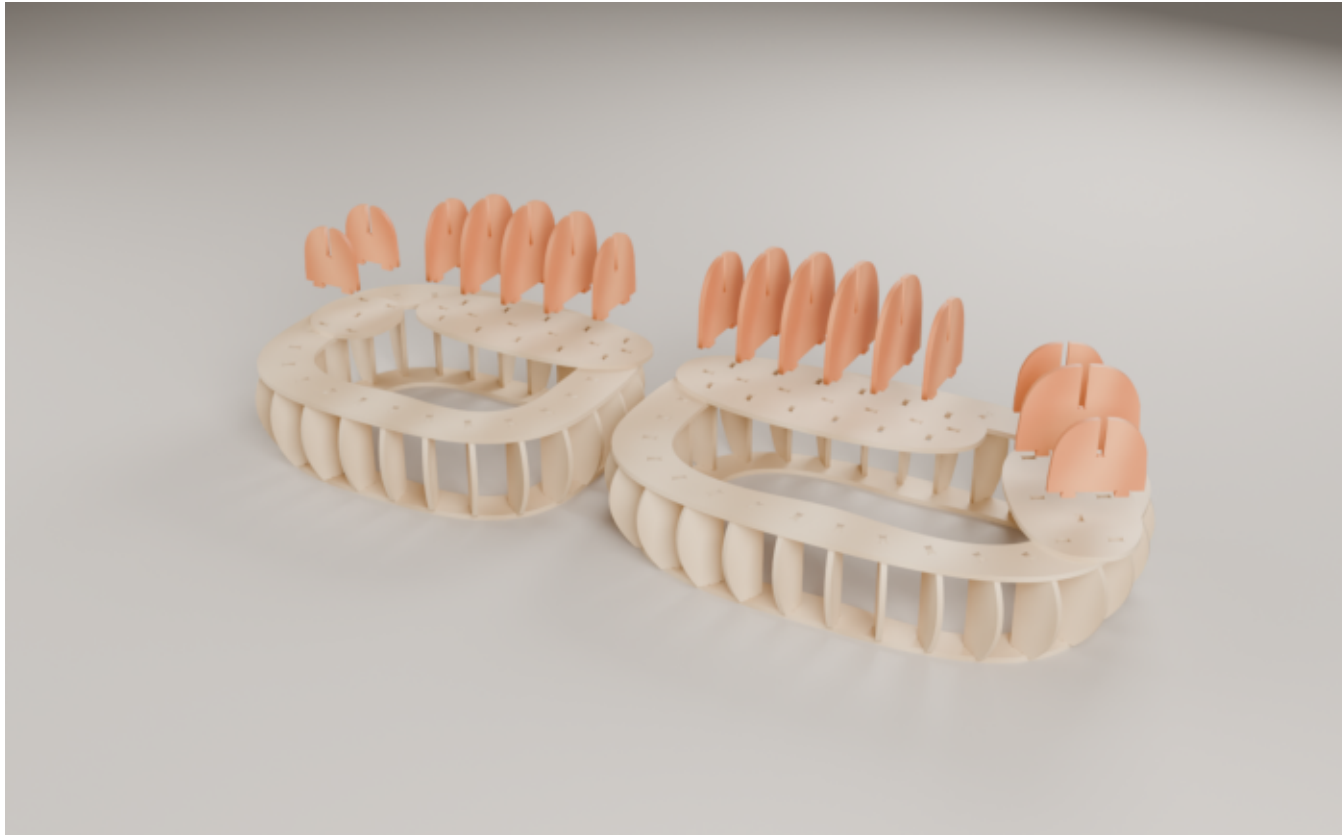

New parts are shown in terracotta, a few cm before they slide into place along their tabs.

PEBBLE SOFA / STEP 06 - Pebble spines

Lower each spine over its ribs (egg-crate) until its tabs seat in the plate. Check square, glue every joint.



New parts are shown in terracotta, a few cm before they slide into place along their tabs.

PEBBLE SOFA / BEFORE YOU GLUE

Dry-fit the whole frame first. The 1 mm clearance is an UNTESTED FIT:

cut one test slot on an offcut and try a tab before cutting the sheets.

If tabs are loose, lower CLEARANCE; if tight, measure the board and raise

MATERIAL_THICKNESS - then regenerate (build.py) rather than sanding.

Glue: PVA D3 in every mortise and halving. Staples through the tabs.

Pebble plates: 4 x 40 mm screws + glue into the seat ring each.

Seat: elastic webbing across the seat-ring openings, then foam.

ASSEMBLY SEQUENCE: checked in 3D - every piece slides home along one axis

without touching what is already built. Not yet confirmed on a real build.