



FRONT ELEVATION

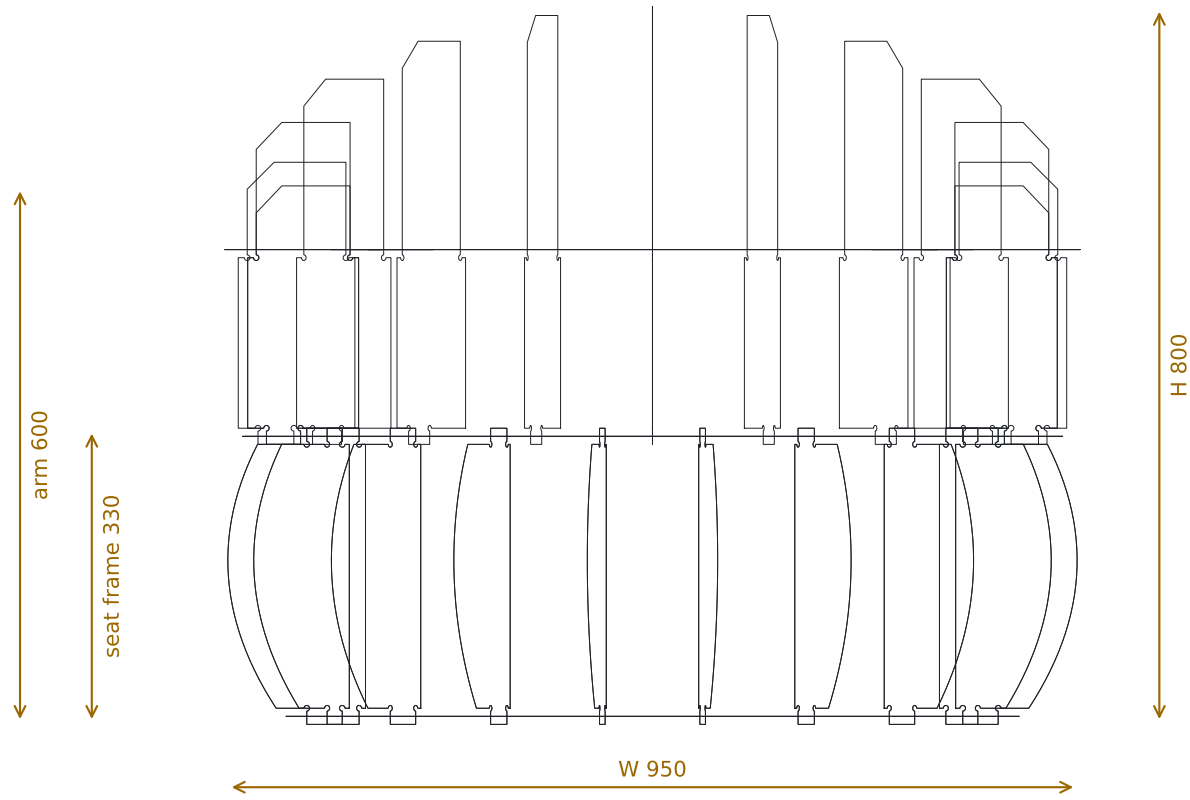

PLAN

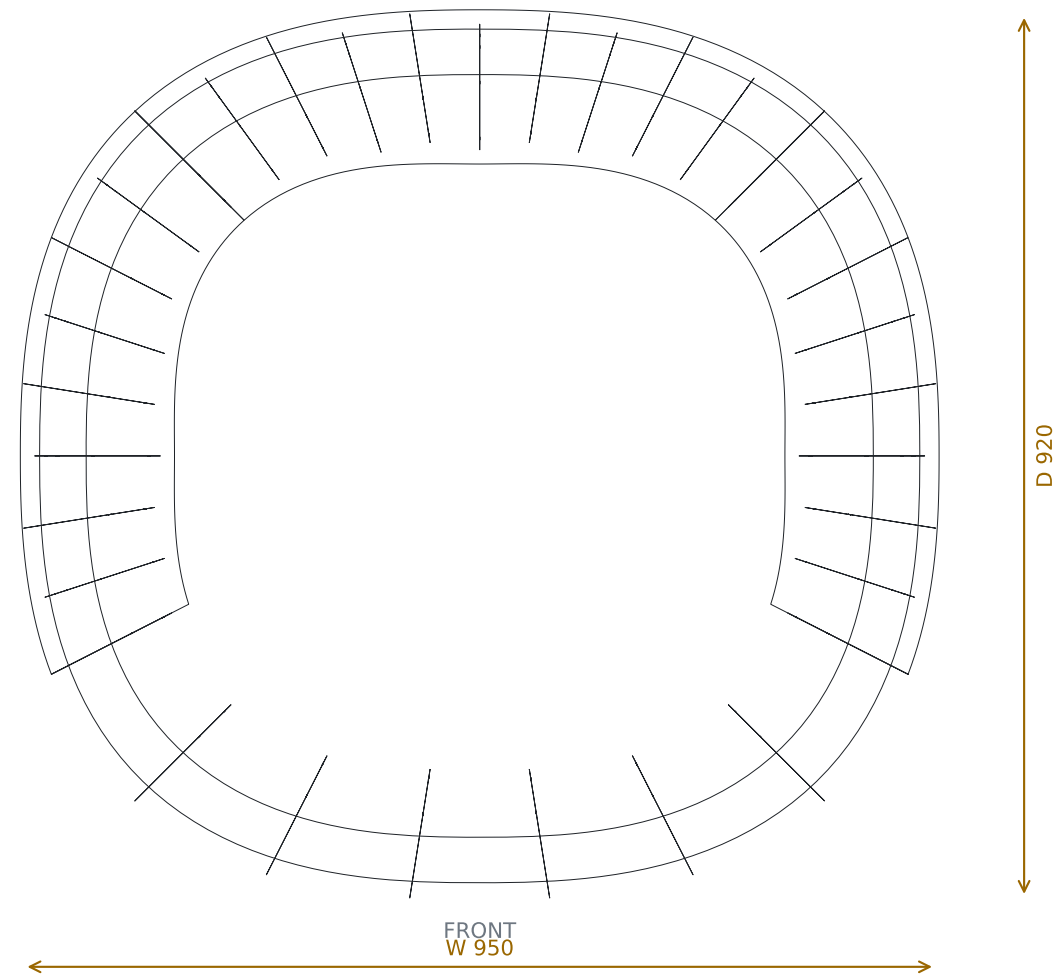

ROUND TUB ARMCHAIR / PARAMETERS

every value with its provenance status

PARAMETER	VALUE	UNIT	STATUS	NOTE
MATERIAL	MDF		USER_CONFIRMED	user works in MDF; birch plywood also suitable
MATERIAL_THICKNESS	18	mm	USER_CONFIRMED	NOMINAL - measure the real sheet before cutting
CLEARANCE	1	mm	ADOPTED_FROM_TOKYO_PACK	total across each slot - UNTESTED FIT
SLOT_WIDTH	19	mm	DERIVED	MATERIAL_THICKNESS + CLEARANCE
TAB_LENGTH	40	mm	ADOPTED_FROM_TOKYO_PACK	
MORTISE_LENGTH	41	mm	DERIVED	TAB_LENGTH + CLEARANCE
SLOT_DEPTH	18	mm	DERIVED	through-mortises: full board thickness
CNC_BIT_DIAMETER	6	mm	ASSUMED_USER_INPUT_REQUIRED	sizes every dogbone relief
RELIEF_RADIUS	3.2	mm	DERIVED	CNC_BIT_DIAMETER / 2 + 0.2
KERF_COMPENSATION		mm	UNKNOWN	apply the tool-radius offset in CAM; the DXF is net
SHEET_SIZE	2440 x 1220	mm	ASSUMED_USER_INPUT_REQUIRED	standard sheet; confirm the supplier size
PART_GAP	10	mm	ADOPTED_FROM_TOKYO_PACK	
SHEET_EDGE	9	mm	ADOPTED_FROM_TOKYO_PACK	clamping margin
WIDTH	950	mm	DESIGN_CHOICE_UNCONFIRMED	widest point of the belly
DEPTH	920	mm	DESIGN_CHOICE_UNCONFIRMED	
HEIGHT	800	mm	DESIGN_CHOICE_UNCONFIRMED	top of the back
ARM_HEIGHT	600	mm	DESIGN_CHOICE_UNCONFIRMED	
SEAT_FRAME_HEIGHT	330	mm	DESIGN_CHOICE_UNCONFIRMED	about +100 mm with the seat cushion
BAND_HEIGHT	520	mm	DESIGN_CHOICE_UNCONFIRMED	underside of the back bands
PLAN_SHAPE_EXPONENT	2.6		DESIGN_CHOICE_UNCONFIRMED	superellipse; 2 = ellipse, higher = squarer
BELLY_BASE_FRACTION	0.86		DESIGN_CHOICE_UNCONFIRMED	rib edge at floor / widest radius
BELLY_SEAT_FRACTION	0.93		DESIGN_CHOICE_UNCONFIRMED	rib edge at seat / widest radius
BODY_RIB_COUNT	20		DESIGN_CHOICE_UNCONFIRMED	every 18 deg
BACK_RIB_COUNT	13		DESIGN_CHOICE_UNCONFIRMED	-18 .. 198 deg, every 18 deg
BACK_RIB_DEPTH	110	mm	DESIGN_CHOICE_UNCONFIRMED	above the band shoulder
GRAIN_DIRECTION			DERIVED	not applicable to MDF; for plywood, run rib grain ve