

Opto-electronic sensors for distance measurement: SOEL-RTD-Q50

FESTO



High precision

The specialist amongst sensors: Locates even the smallest of objects by means of a visible and high-precision red laser beam, regardless of size or colour.

The measured values are sent as an analogue or binary output according to the distance within a predefined window.

Easy to use

Teach-in via the integrated control panel or using external "teach-in" input.

Sturdy housing

Meets the requirements of protection class IP67.

High performance

Offers the fastest response times and a variety of functions to choose from.

Flexible mounting options

Adjustable connector which can be rotated 270° and a compact housing measuring 50 x 50 x 17 mm.

Flexible

A wide spectrum of reading windows facilitates exact adaptation to a range of applications.



High performance

Flexible

Teach-in!

316.6.PSI →

Product Short Information

Opto-electronic sensors for distance measurement: SOEL-RTD-Q50

Applications

- Quality control
 - Measurement of components for the ceramics industry
 - Positioning body parts, gripper robots, etc. for the automotive industry
 - Measurement and positioning of production parts
- Detection of stacks or coils in punching and bending machines for the metal and paper industries
 - Measurement of profile thickness in wood working machines


Technical data	
Type	SOEL-RTD-Q50-PP-S-7L
Measuring range	80 ... 300 mm
Analogue	4 ... 20 mA
Resolution	0.10 %
Linearity	0.25 %
Variations in temperature	< 0.02 %/°C
Outputs	2 PNP, programmable
Connection	M12 plug, 8-pin
Output current	100 mA
Operating voltage	16 ... 30 V DC (±10 %)
Switching frequency	100 Hz
Light source	Red laser beam 650 nm
Light spot	Max. 2 x 4 mm at meas. dist.
Protection against polarity reversal	Yes
Short circuit protection	Yes
Protection class	IP67
Operating temperature	-10 ... +60 °C
Housing material	ABS

Accessories	Type
2 m cable/plug	SIM-M12-8GD-2-PU
Mounting bracket	SOEZ-HW-Q50


Dimensions



Mounting position

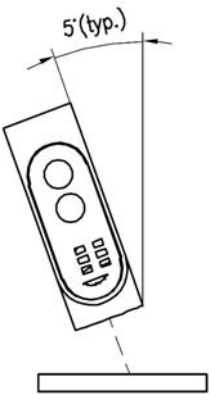

Operating distance

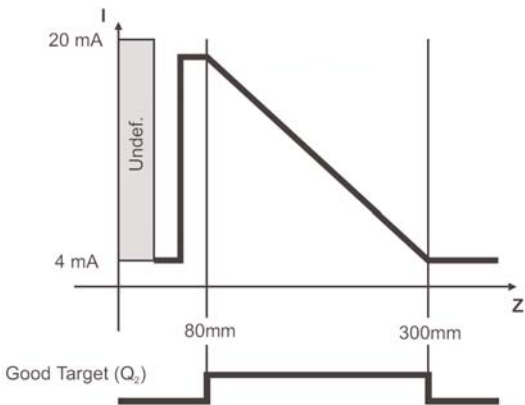

Festo AG & Co. KG

Ruiter Strasse 82
D-73734 Esslingen
Internet www.festo.com
Tel. ++49 (0) 711 347-0
Fax ++49 (0) 711 347-21 44
E-mail service_international@festo.com