



>> IN THE NAME OF ALLAH, THE MOST GRACIOUS, THE MOST MERCIFUL <<

SENSITIVITY ANALYSIS OF SINGLE-DEGREE-FREEDOM (SDOF) STRUCTURES USING INCREMENTAL DYNAMIC ANALYSIS EFFECTS OF INITIAL DISPLACEMENT, STRUCTURAL ELASTIC STIFFNESS, STRUCTURAL DUCTILITY RATIO AND OVER-STRENGTH FACTOR ON OUTPUT KEY PARAMETERS SUCH AS EQUIVALENT VISCOUS DAMPING RATIO FROM NONLINEAR DYNAMIC ANALYSES USING PYTHON AND OPENSEES




THIS PROGRAM WRITTEN BY SALAR DELAVAR GHASHGHAEE (QASHQAI)

INCREMENTAL
DISPLACEMENT


$$P(t) = P_0 e^{-0.05\bar{\omega}t} \sin(\bar{\omega}t)$$

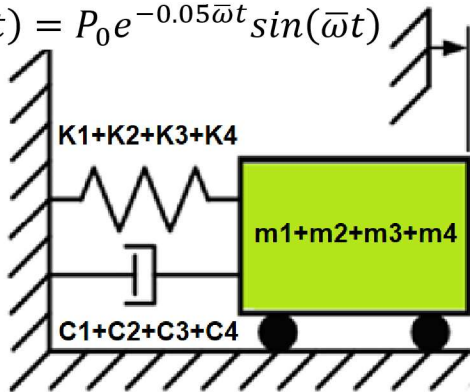

Initial Displacement
Initial Velocity
Initial Acceleration



INCREMENTAL
DISPLACEMENT

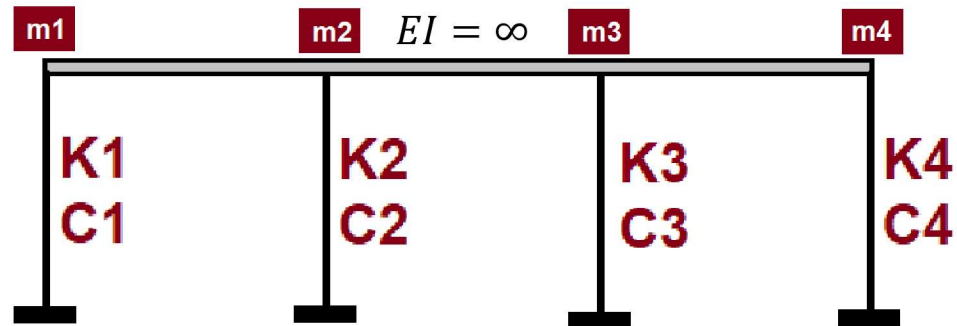

$$\text{Structural Ductility Damage Index} = \frac{\Delta_d - \Delta_y}{\Delta_u - \Delta_y}$$



Δ_d = Lateral Displaement from Dynamic Analysis

Δ_y = Lateral Yield Displaement from Pushover Analysis


Δ_u = Lateral Ultimate Displaement from Pushover Analysis

$$P(t) = P_0 e^{-0.05\bar{\omega}t} \sin(\bar{\omega}t)$$

$$m\ddot{u} + c\dot{u} + ku = P(t)$$

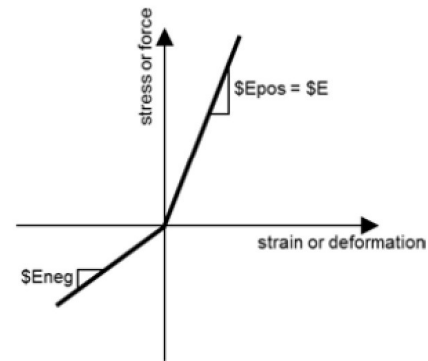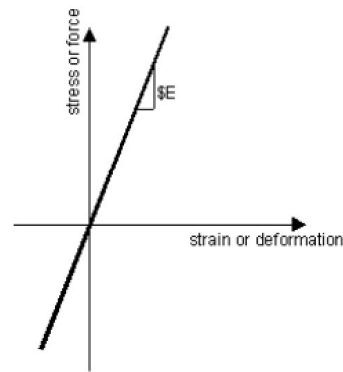

ELASTIC MATERIAL

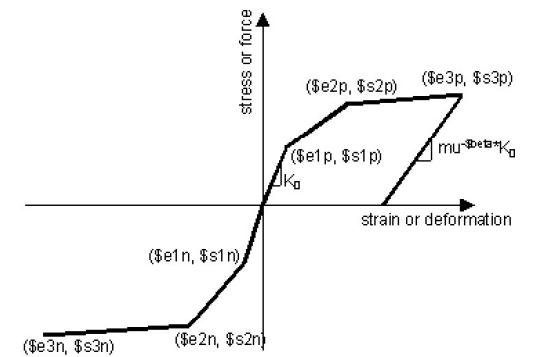

INELASTIC MATERIAL

Energy quantities and the damping formula

- **Dissipated energy** E_d – the area enclosed by the hysteresis loop. This is the net work done per cycle and represents the energy that must be removed from the system to return it to the original state. Physically, it corresponds to plastic yielding, friction, cracking, or other irreversible mechanisms.
- **Maximum strain energy** E_s – defined here as


$$E_s = \frac{1}{2} F_{\max} u_{\max}$$


where $u_{\max} = \max |u|$ is the peak absolute displacement in the loop and $F_{\max}$ is the absolute value of the force **at that same displacement**. This definition assumes a **secant stiffness** $k_{\text{sec}} = F_{\max}/u_{\max}$ and represents the elastic strain energy stored at peak displacement if the system were linear with that stiffness.


The equivalent viscous damping ratio is then:


$$\xi_{eq} = \frac{100 E_d}{4\pi E_s} \quad [\%]$$

This stems from equating E_d to the energy dissipated per cycle by a linear viscous damper, $E_d = \pi c \omega u_{\max}^2$, while $E_s = \frac{1}{2} k u_{\max}^2$; substituting $\xi = c/(2m\omega)$ and $\omega^2 = k/m$ yields the familiar expression $\xi = E_d/(4\pi E_s)$.

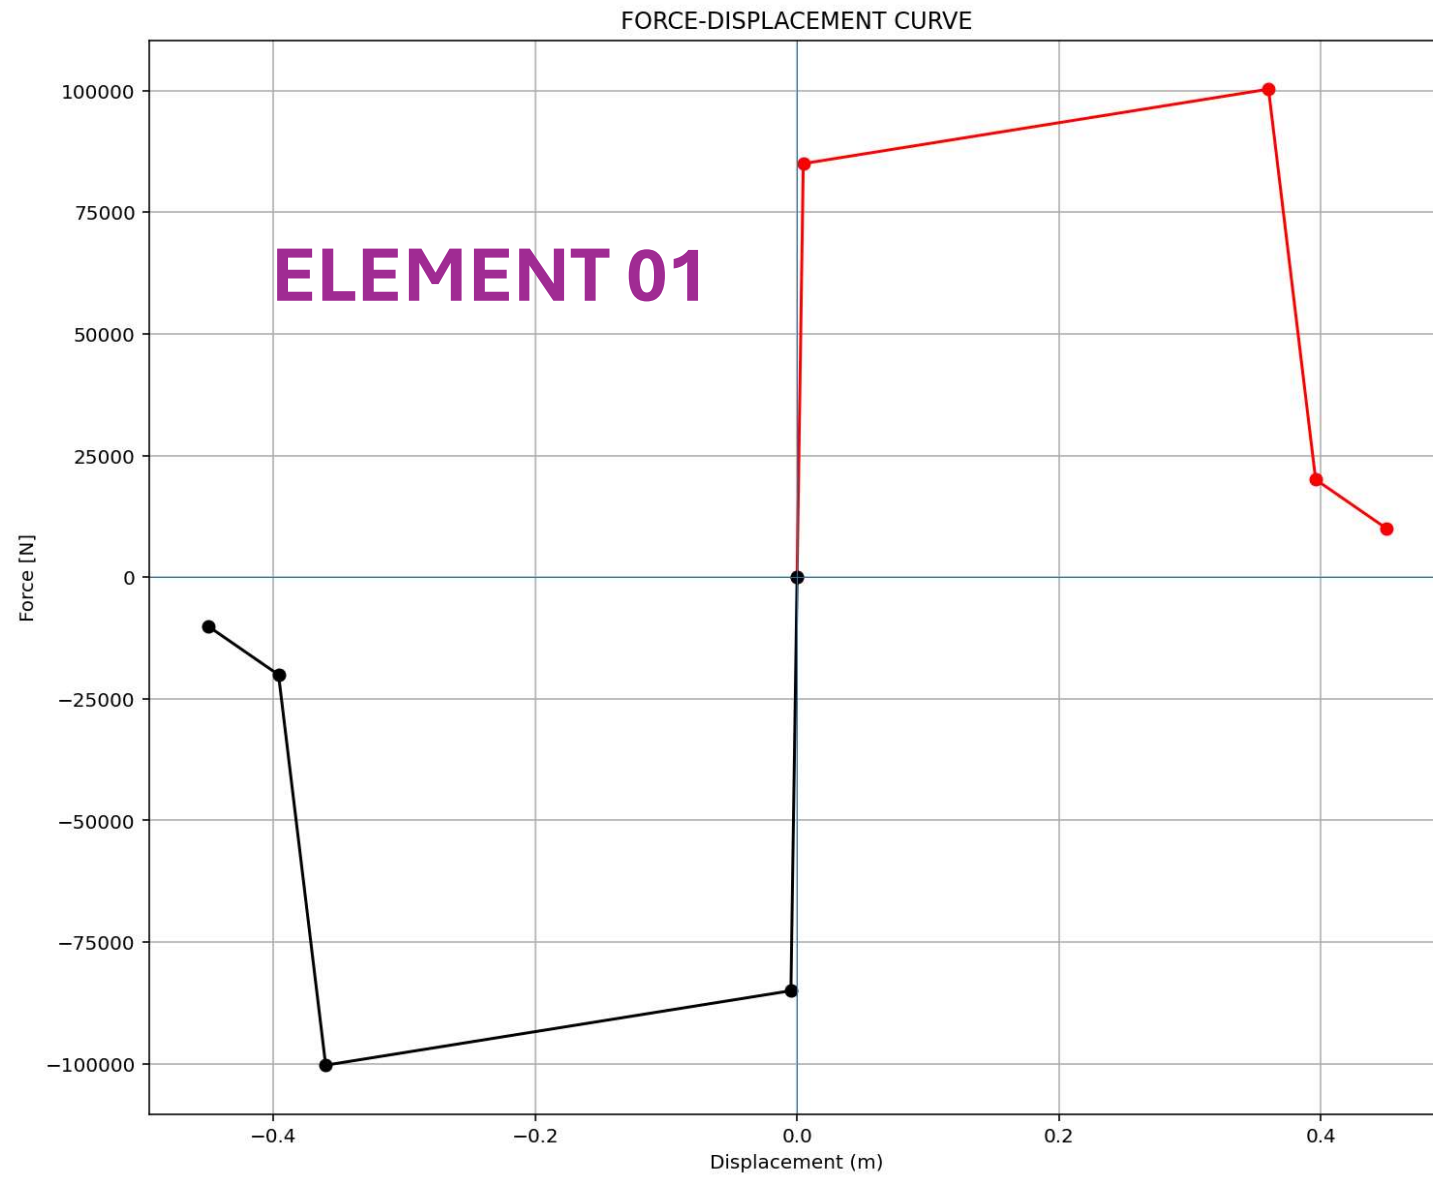

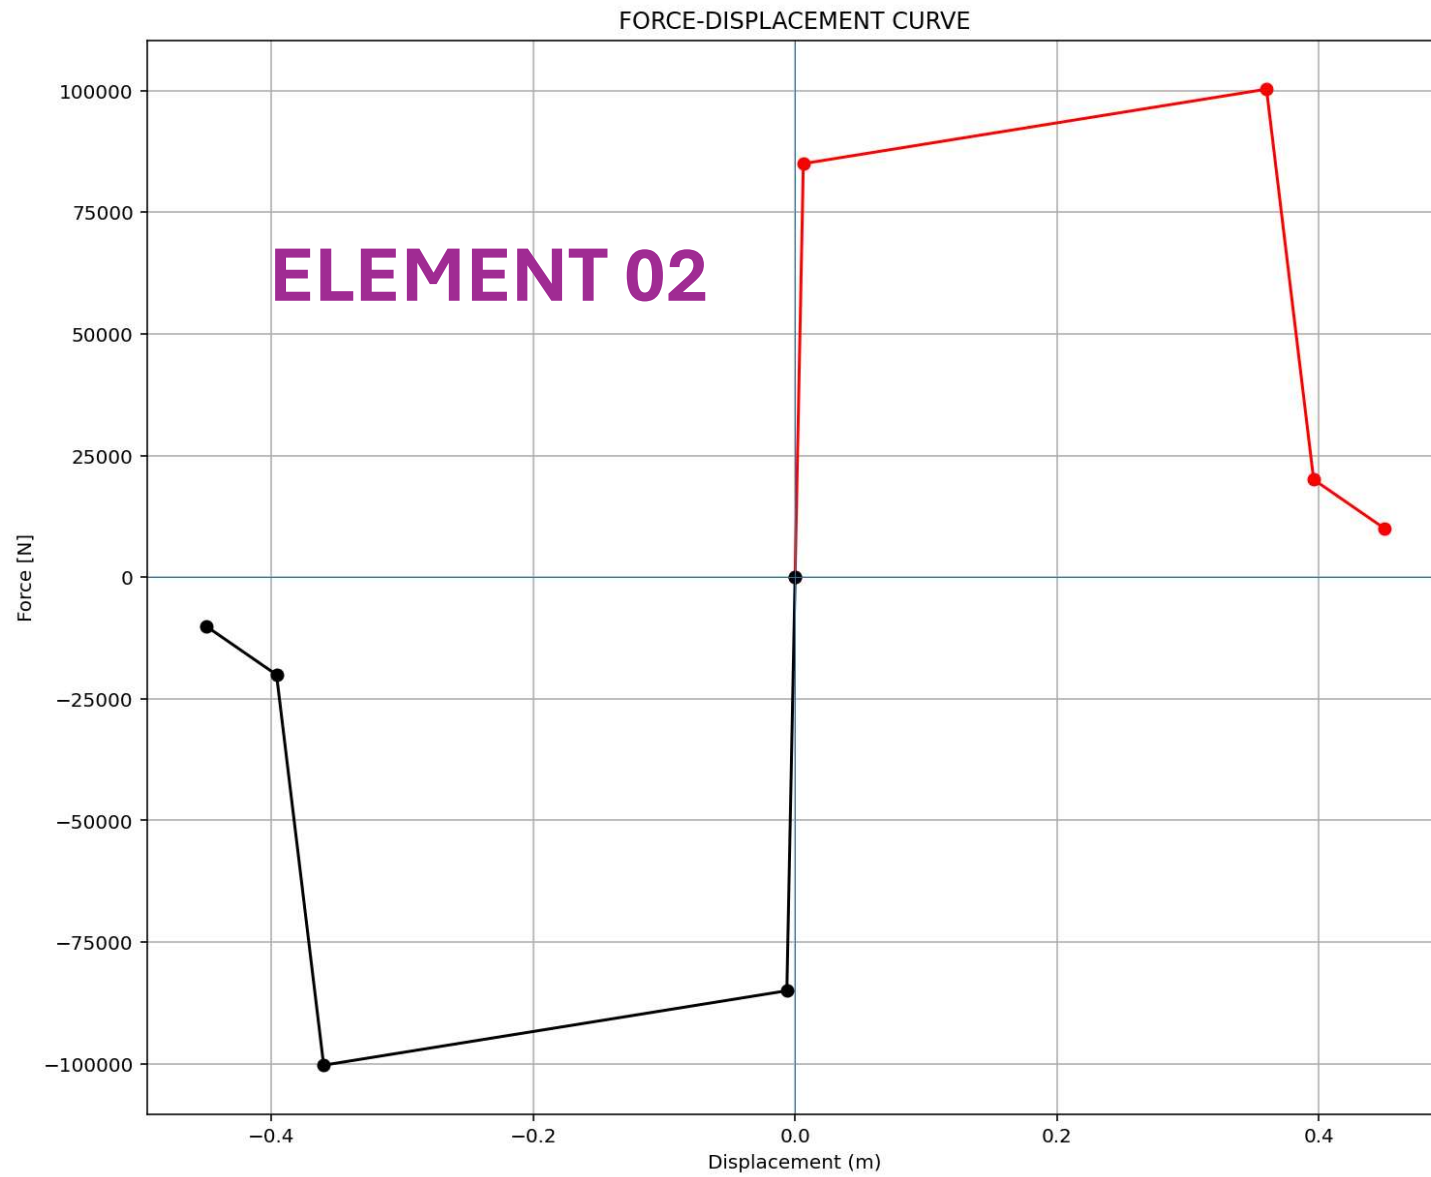

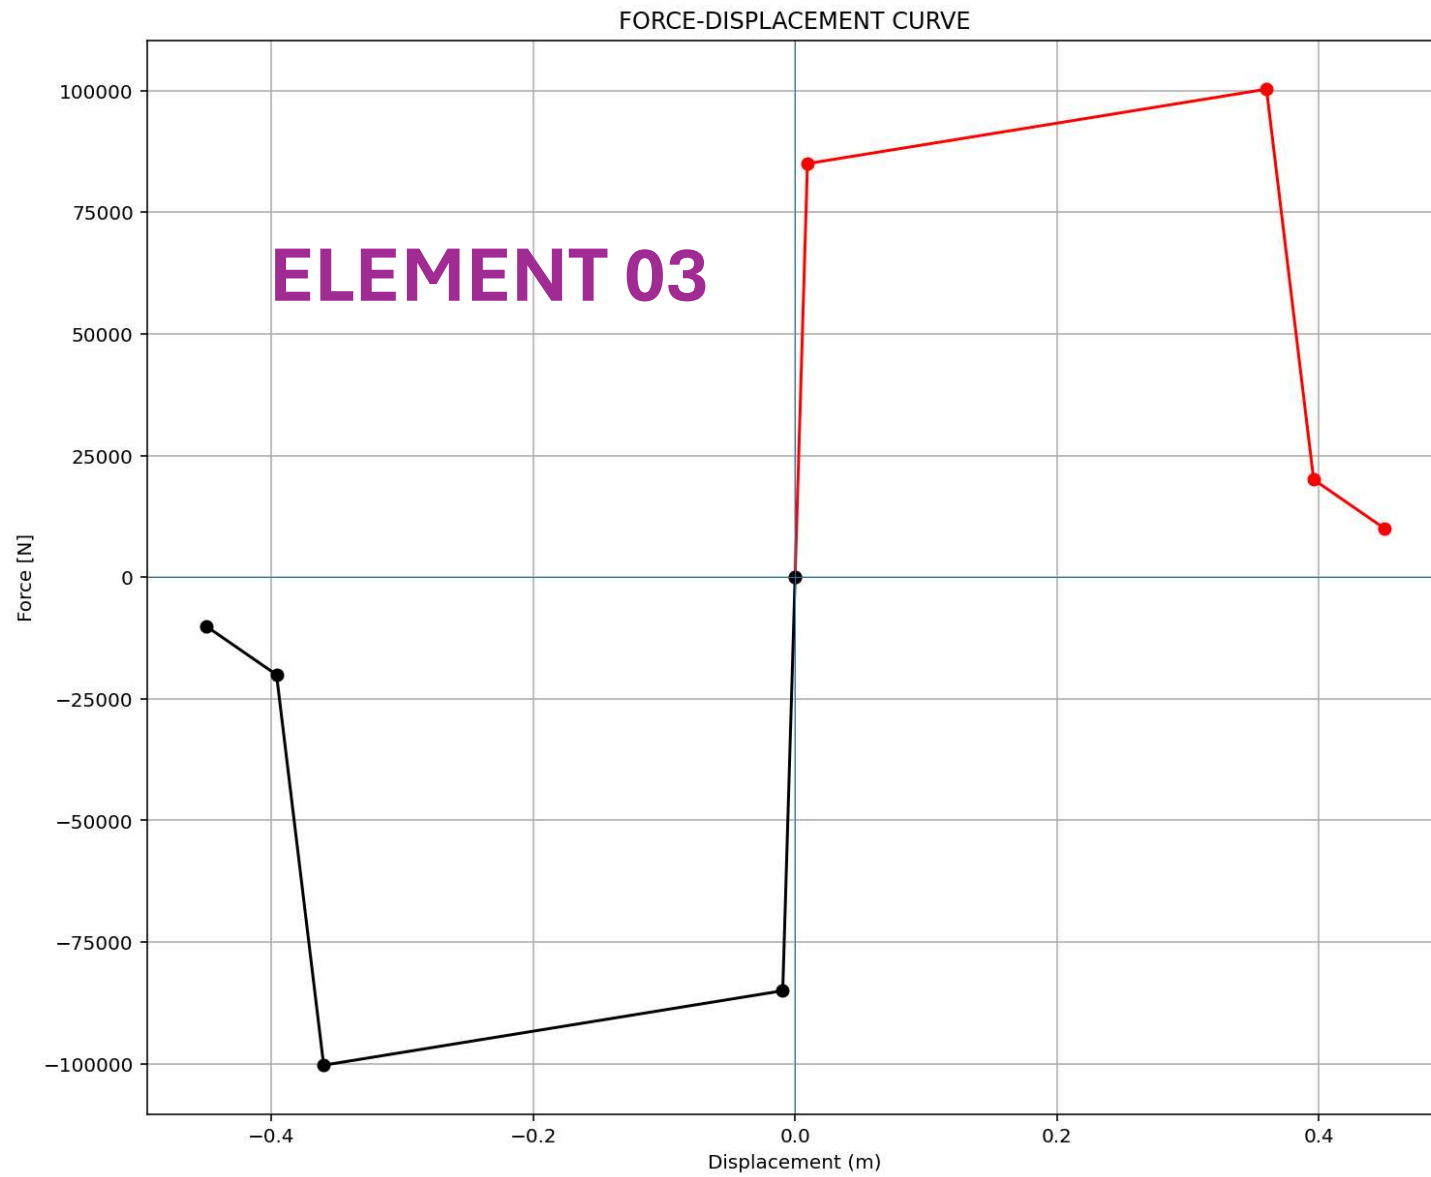

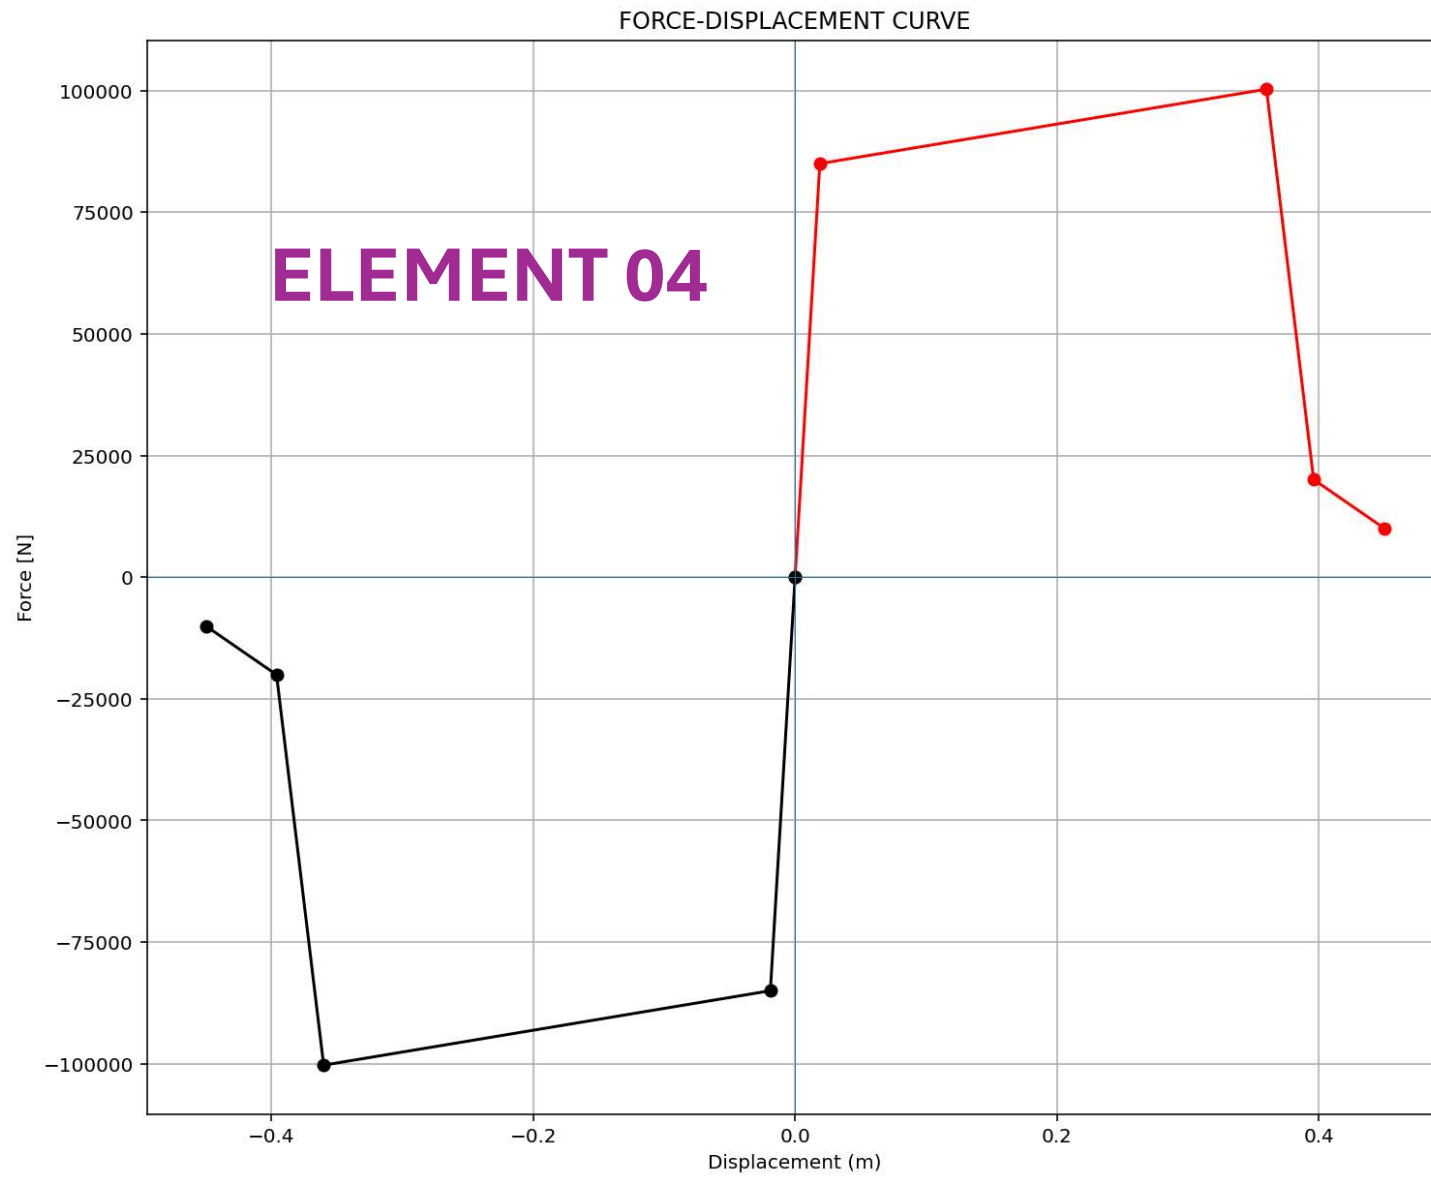

INCREMENTAL DYNAMIC ANALYSIS

Spyder (Python 3.12)

File Edit Search Source Run Debug Consoles Projects Tools View Help

C:\Users\Dell\Desktop\OPENSEES_FILES\+HEIGHT_ANALY...t)_SENSITIVITY_ANALYSIS_SDOF_FOUR_ELEMENTS_IDA.py

P(t)_SENSITIVITY_A...UR_ELEMENTS_IDA.py x EQLIVALENT_VISCOUS_DAMPING_RATIO_FUN.py x

```
1 #####
2 # >> IN THE NAME OF ALLAH, THE MOST GRACIOUS, THE MOST MERCIFUL <<
3 # SENSITIVITY ANALYSIS OF SINGLE-DEGREE-FREOM (SDOF) STRUCTURES USING INCREMENTAL DYNAMI
4 # EFFECTS OF STRUCTURAL MASS, ELASTIC STIFFNESS, STRUCTURAL DUCTILITY RATIO
5 # AND OVER-STRENGTH FACTOR ON OUTPUT KEY PARAMETERS SUCH AS EQLIVALENT VISCOUS DAMPING
6 # FROM NONLINEAR DYNAMIC ANALYSES USING PYTHON AND OPENSEES
7 #-----
8 # THIS PYTHON SCRIPT WRITTEN BY SALAR DELAVAR GHASHGHAEI (QASHQAI)
9 # EMAIL: salar.d.ghashghaei@gmail.com
10 #####
11 """
12 1. This script performs a "sensitivity analysis of a single-degree-of-freedom (SDOF) structur
13 2. The objective is to study the effects of "initial displacement, structural elastic stiffnes
14 3. Structural properties such as "yield force, ultimate force, elastic stiffness, hardening r
15 4. Elastic and plastic periods of the system are computed and reported.
16 5. Key seismic performance parameters are calculated, including "over-strength ( $\Omega_0$ )", "ductil
17 6. A nonlinear "hysteretic spring model" is used to represent structural behavior with streng
18 7. A "viscous damper" is added to simulate energy dissipation.
19 8. The analysis considers "Incremental Dynamic due to initial displacement" (no external grow
20 9. The function `ANALYSIS_SDOF` builds the OpenSees model, applies initial conditions, and ru
21 10. "Newmark time integration" and "Newton-Raphson iteration" are used for nonlinear solution
22 11. "Rayleigh damping coefficients" are computed from the first eigenvalue.
23 12. Time histories of "displacement, velocity, acceleration, base reaction, stiffness, and da
24 13. A "ductility-based damage index" is calculated at each time step.
25 14. The effective stiffness degradation is monitored during the response.
26 15. Multiple simulations are executed by looping over ranges of "damping ratio, initial displ
27 16. For each simulation, "maximum response values" are extracted.
28 17. Damage index values are limited between "0% and 100%".
29 18. All results are stored for post-processing and statistical analysis.
30 19. The script reports completion of each simulation and total runtime.
31 20. Overall, the code provides a "parametric nonlinear dynamic assessment" of SDOF systems un
32 """
33 # BOOK: Dynamics of Structure and Foundation; A Unified Approach-1. Fundamentals-Indrajit Cho
```

2D CONTOUR: ELASTIC STIFFNESS [N/m] - Topographic Map

31 %

IPython Console Plots Variable Explorer Help Debugger History Files


Inline Conda: anaconda3 (Python 3.12.7) LSP: Python Line 54, Col 23 UTF-8 CRLF RW Mem 77%

C:\Users\DELL\Desktop\OPENSEES_FILES\+EIGHT_ANALY...NTS_IDA+EQUIVALENT_VISCOUS_DAMPING_RATIO_FUN.py

P(t)_SENSITIVITY_A...UR_ELEMENTS_IDA.py X EQUIVALENT_VISCOUS_DAMPING_RATIO_FUN.py X


```
1  """ EQUIVALENT VISCOUS DAMPING RATIO
2
3  [1] The function EQUIVALENT_VISCOUS_DAMPING_RATIO_FUN computes the dissipated energy (E_d) us
4
5  [2] Both methods produce the same styled plot: the hysteresis loop in black, the enclosed area
6
7  [3] The bottom section generates a synthetic elliptical hysteresis loop (sinusoidal displaceme
8  THIS PYTHON SCRIPT WRITTEN BY SALAR DELAVAR GHASHGHAEI (QASHQAI)
9  """
10 def EQUIVALENT_VISCOUS_DAMPING_RATIO_FUN(displacement, base_shear, method, XLABEL, YLABEL, TI
11     import numpy as np
12     from scipy.spatial import ConvexHull
13     import matplotlib.pyplot as plt
14     if method == 1:
15
16         """
17         Compute the equivalent viscous damping ratio from a hysteresis loop.
18
19         The dissipated energy per cycle (E_d) is the area enclosed by the loop,
20         computed using the convex hull (Shoelace formula on the hull). The maximum
21         strain energy (E_s) is estimated as 0.5 * F_max * u_max, where u_max is the
22         maximum absolute displacement and F_max is the absolute base shear at that
23         same displacement.
24
25         Parameters
26         -----
27         displacement : array-like
28             Displacement values (assumed to form a closed hysteresis loop).
29         base_shear : array-like
30             Corresponding base shear values.
31         XLABEL : str
32             Label for the x-axis.
33         YLABEL : str
```


31 %

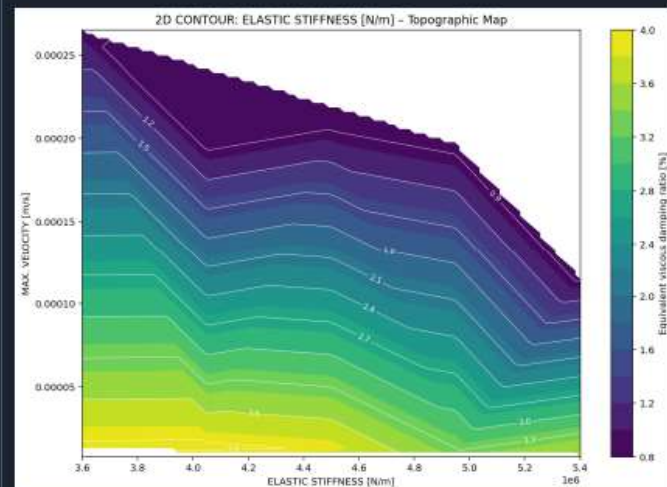


IPython Console Plots Variable Explorer Help Debugger History Files


3D CONTOUR: DUCTILITY RATIO [m/m] - OVER-STRENGTH FACTOR [N/N] - MAX. DISP. [m]

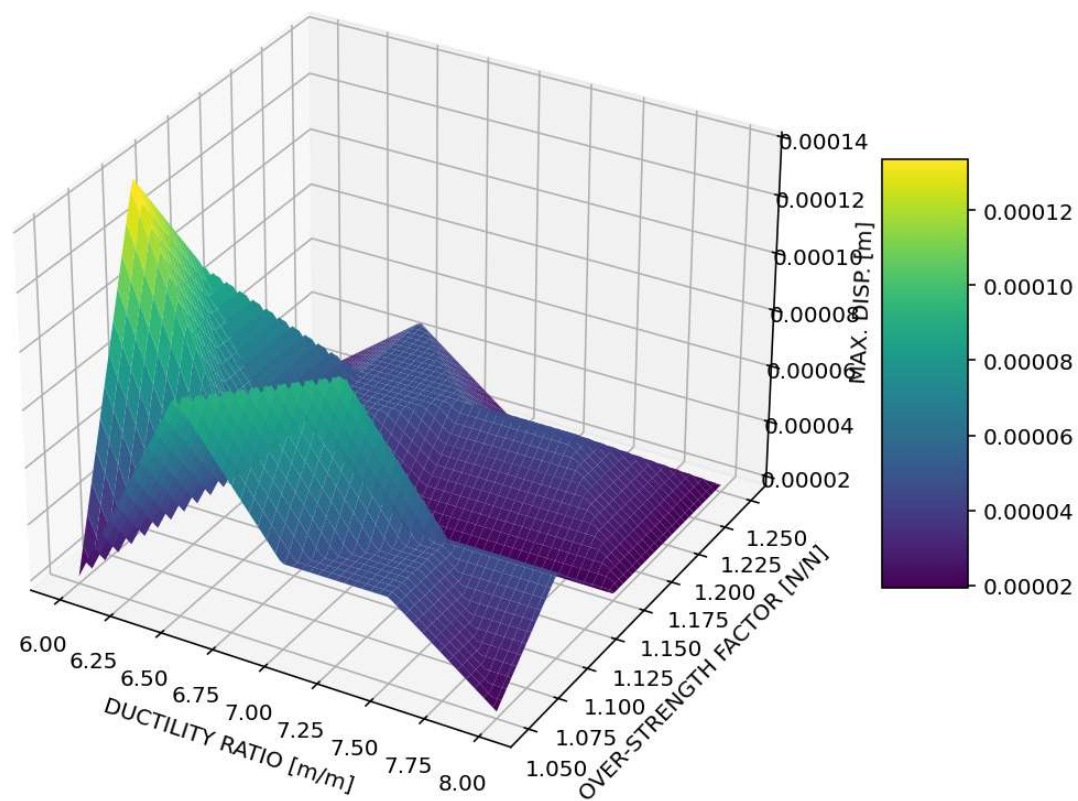

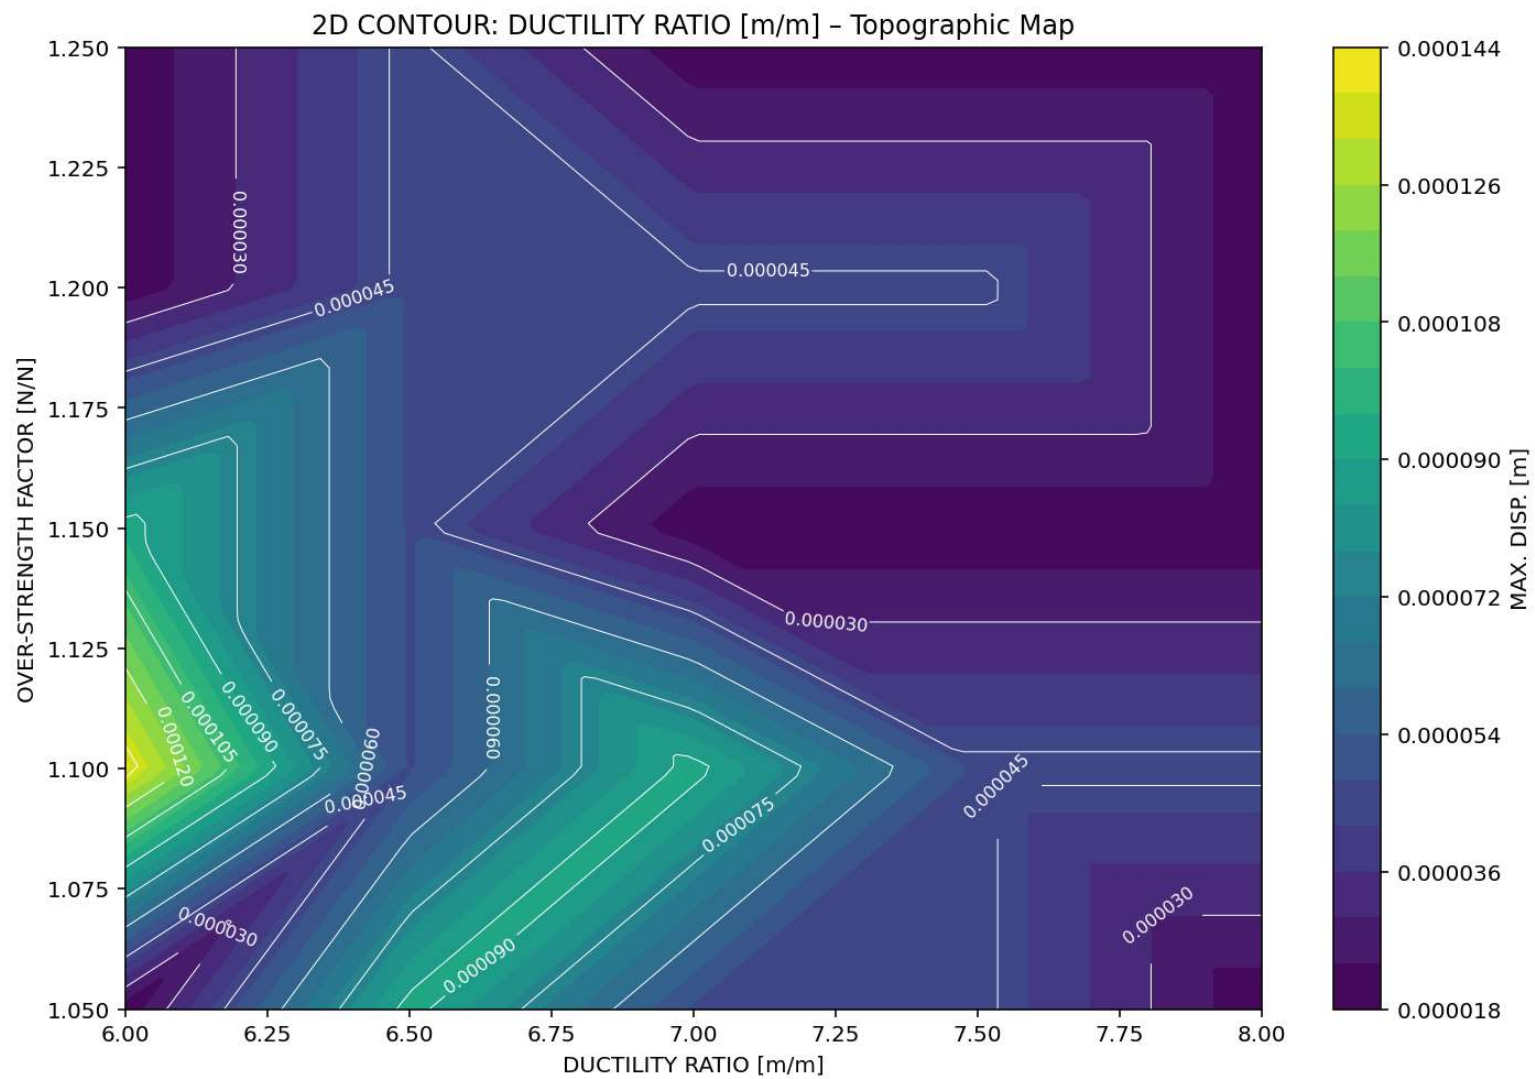



3D CONTOUR: DUCTILITY RATIO [m/m] - OVER-STRENGTH FACTOR [N/N] - MAX. VELOCITY [m/s]

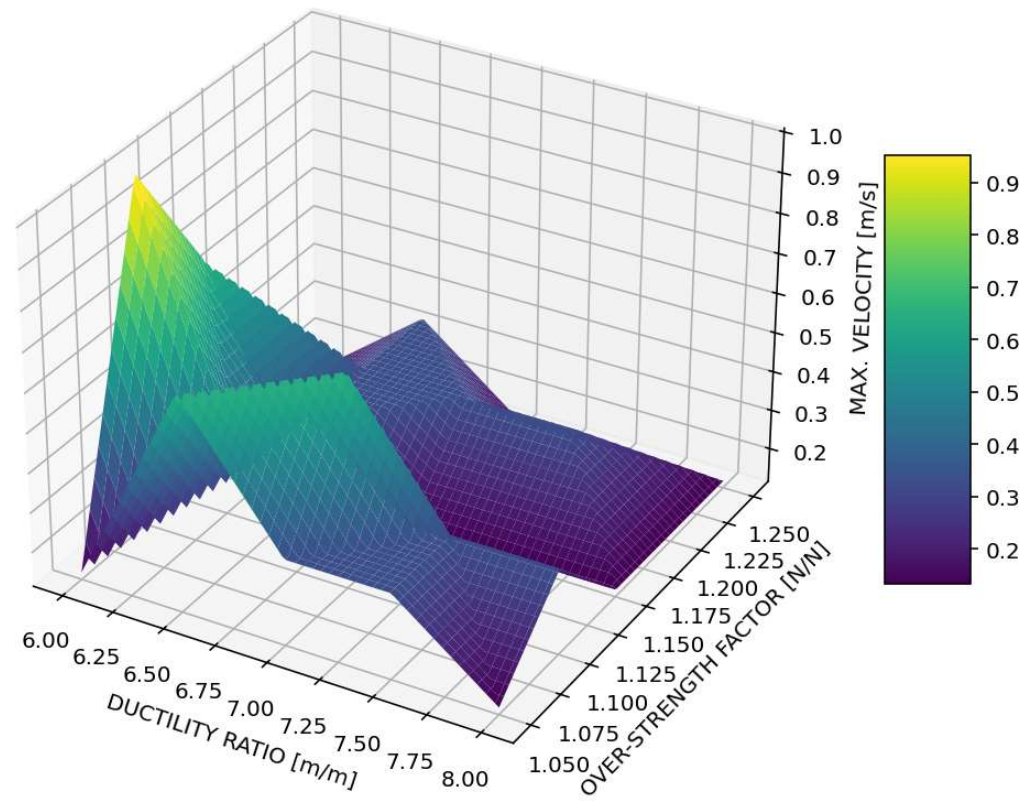

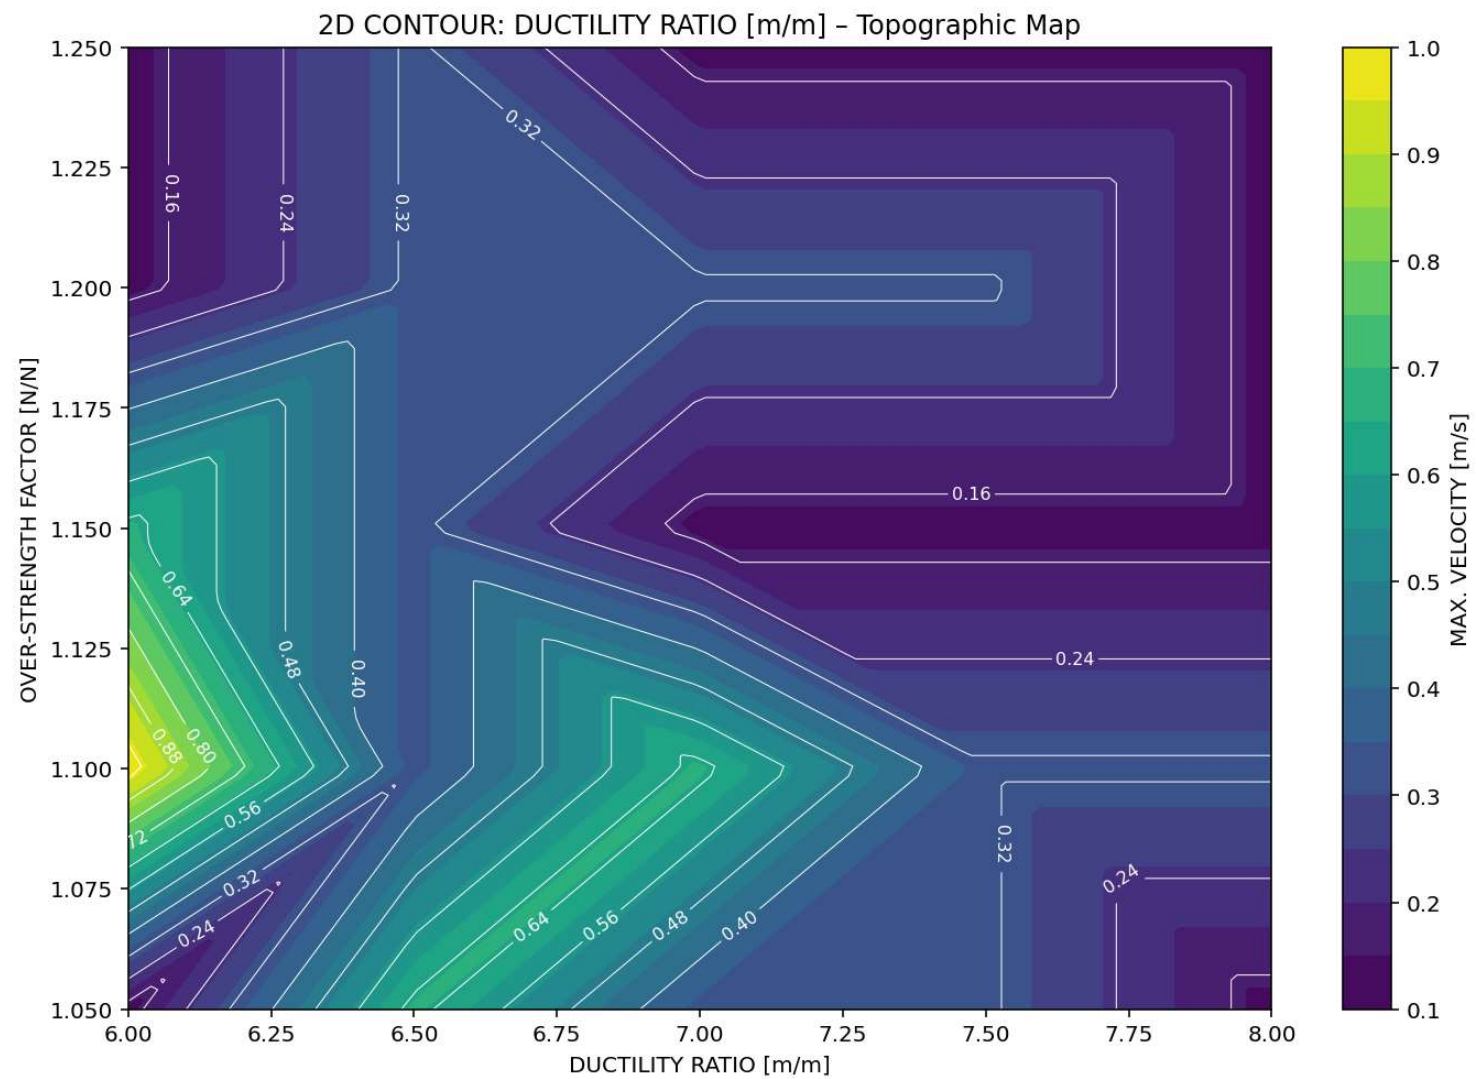



3D CONTOUR: DUCTILITY RATIO [m/m] - OVER-STRENGTH FACTOR [N/N] - MAX. ACCELERATION [m/s²]

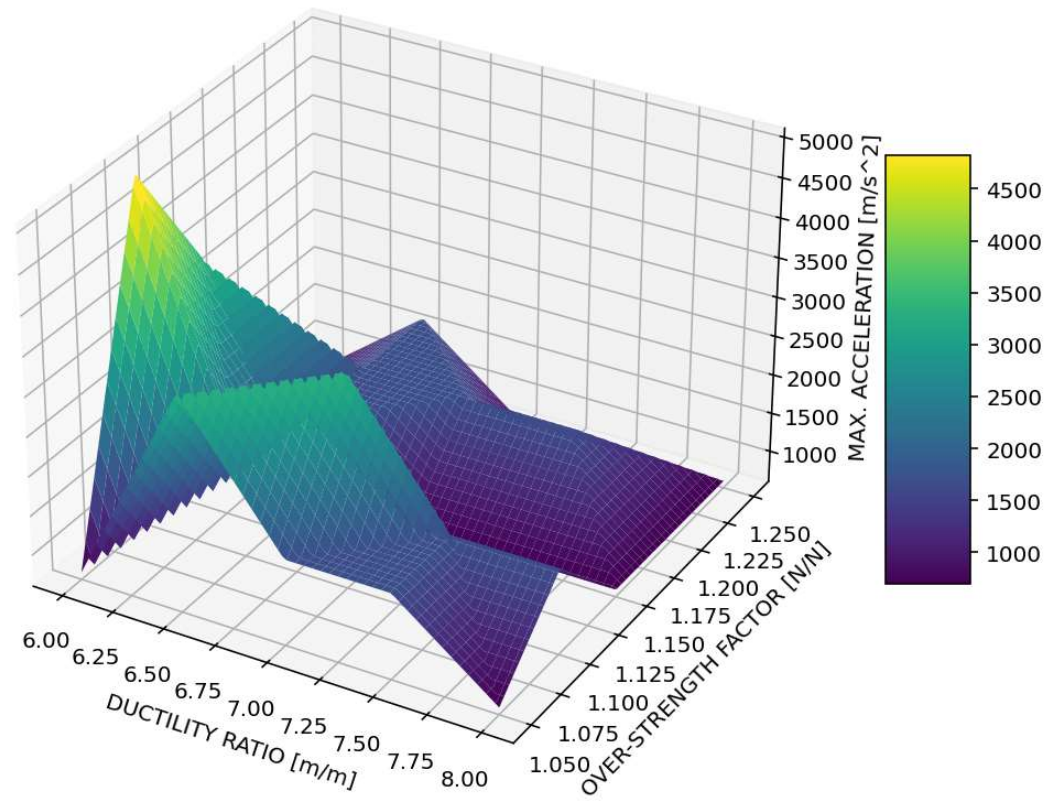

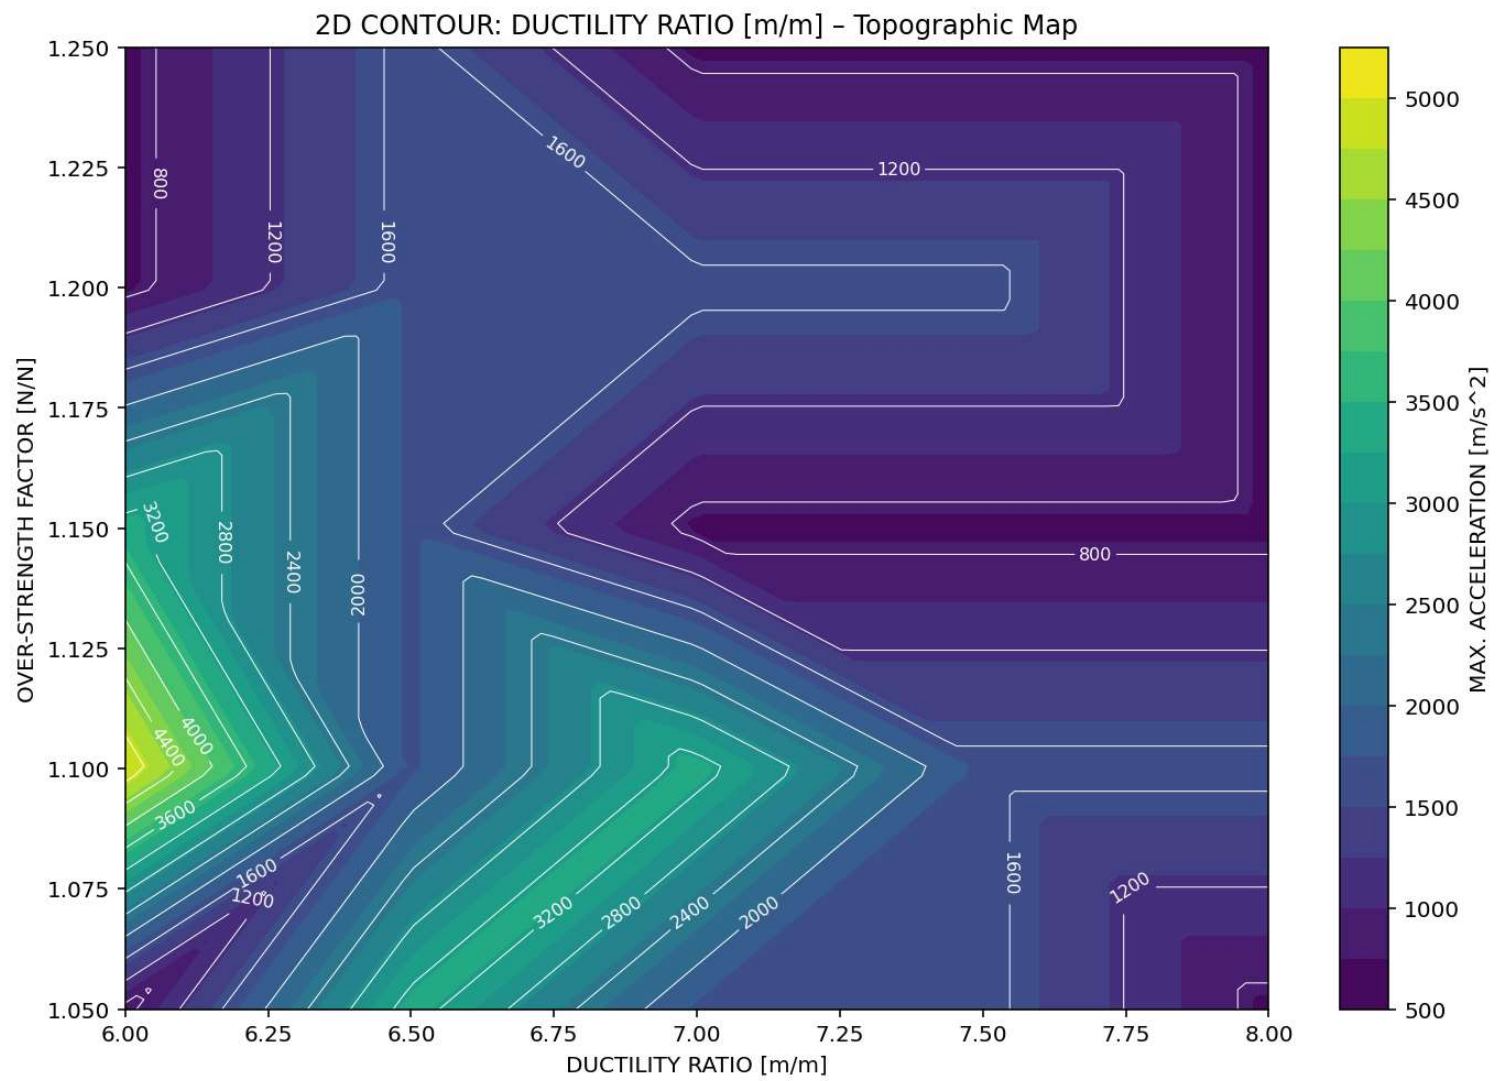



3D CONTOUR: ELASTIC STIFFNESS [N/m] - MAX. ACCELERATION [m/s²] - Equivalent viscous damping ratio [%]

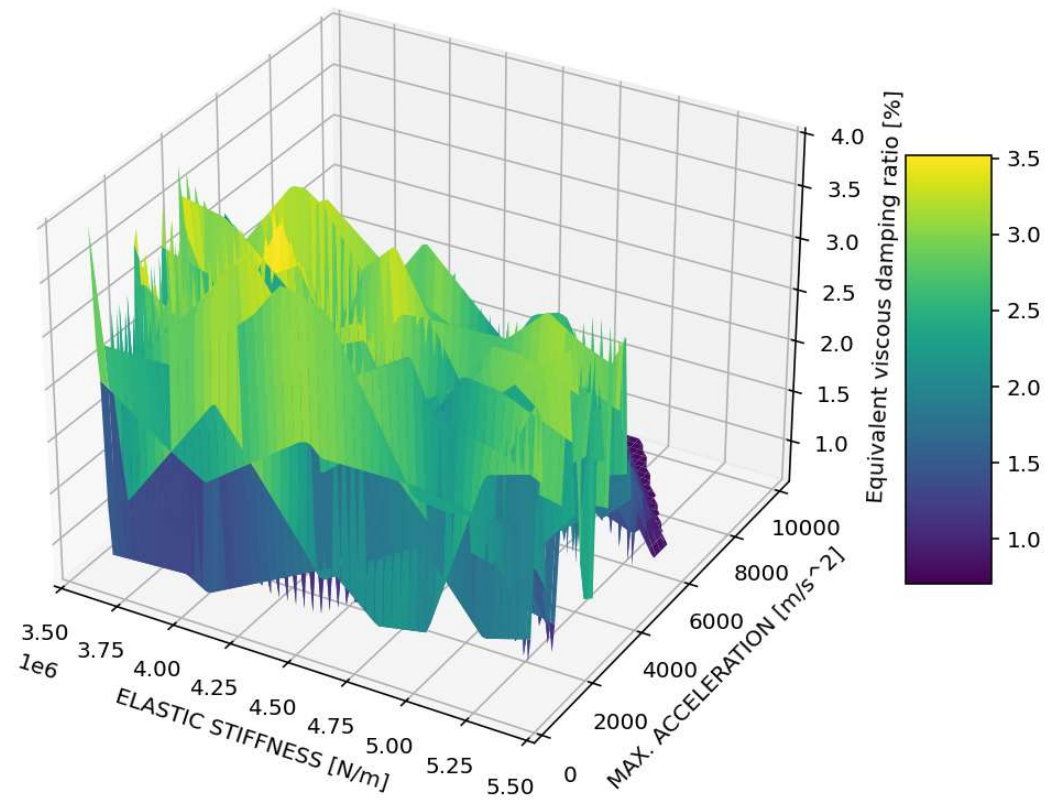

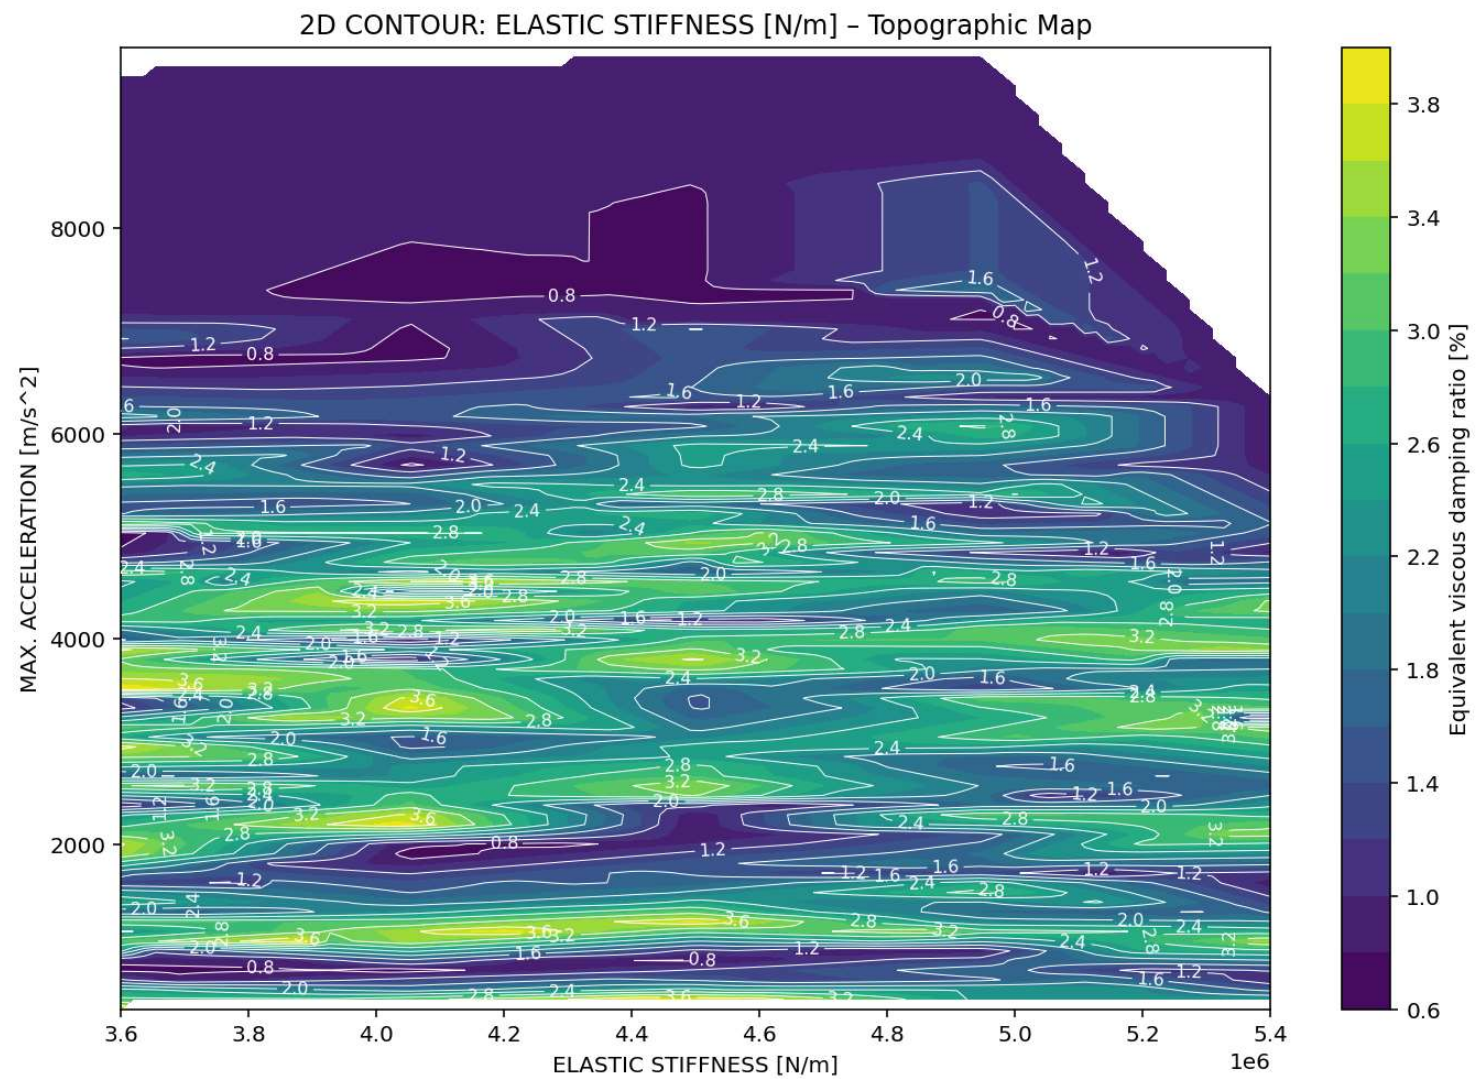



3D CONTOUR: ELASTIC STIFFNESS [N/m] - MAX. VELOCITY [m/s] - Equivalent viscous damping ratio [%]

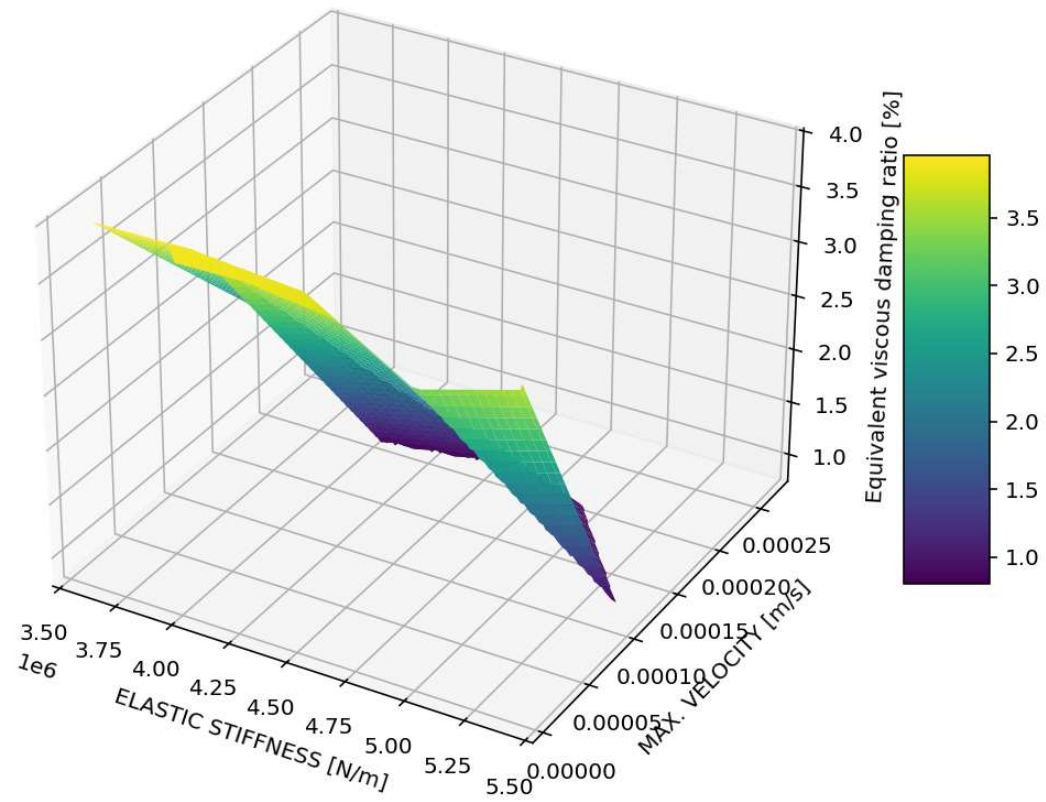

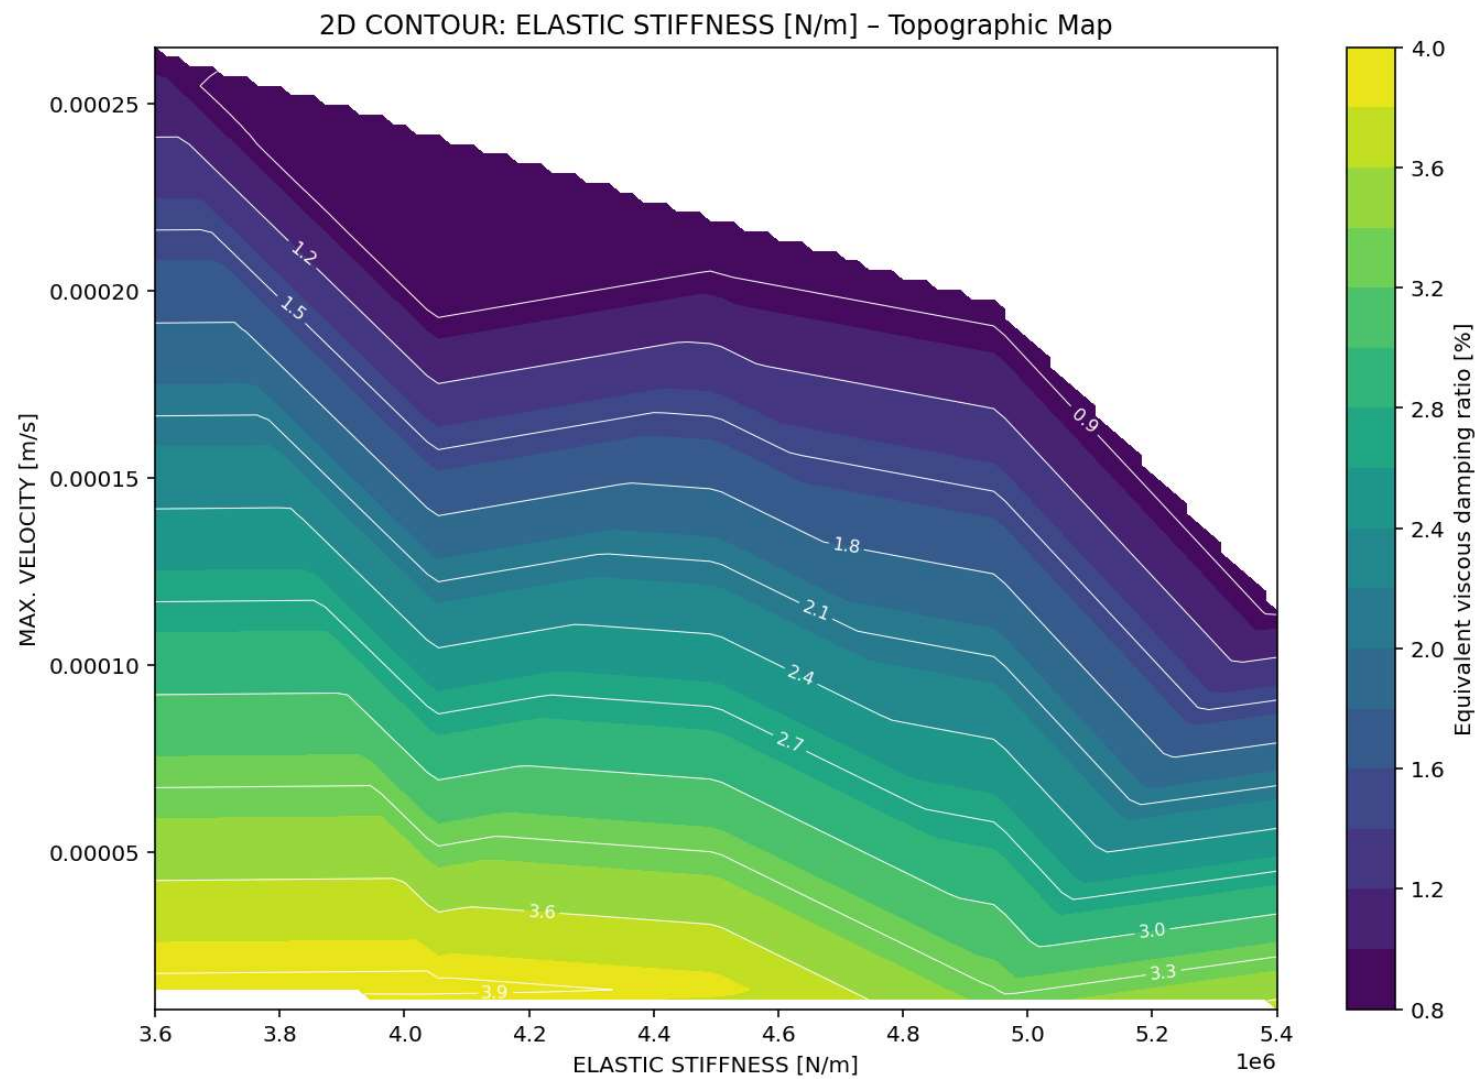



3D CONTOUR: ELASTIC STIFFNESS [N/m] - MAX. DISP. [m] - Equivalent viscous damping ratio [%]

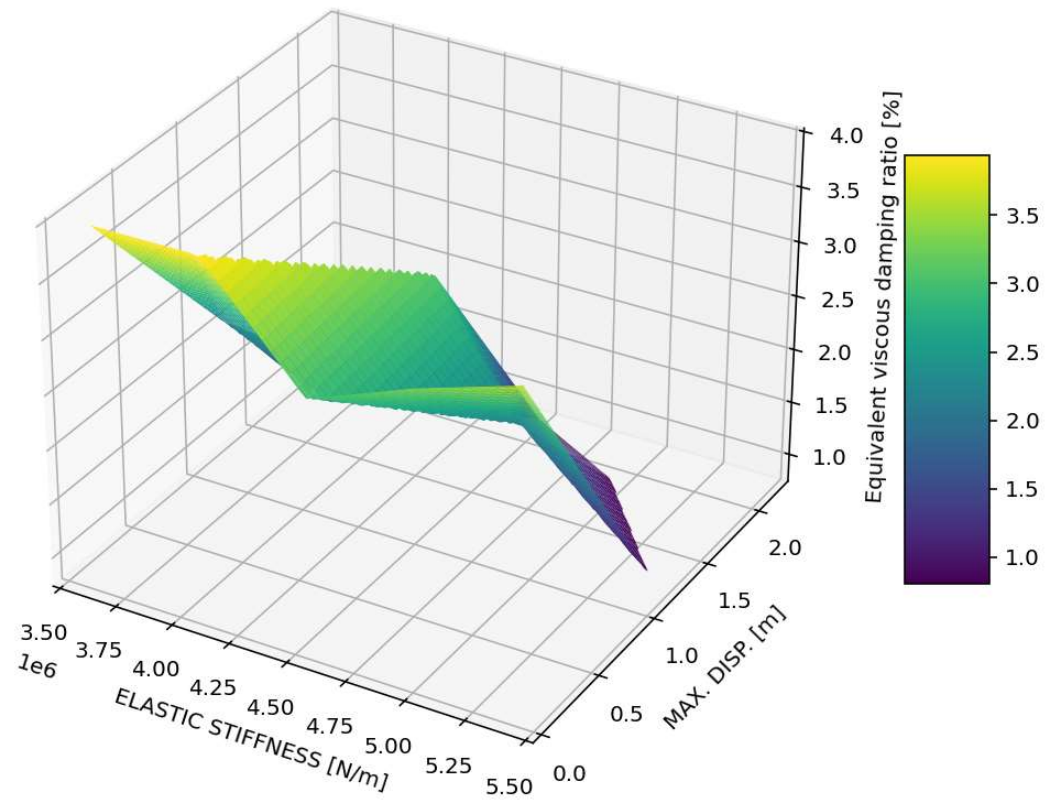

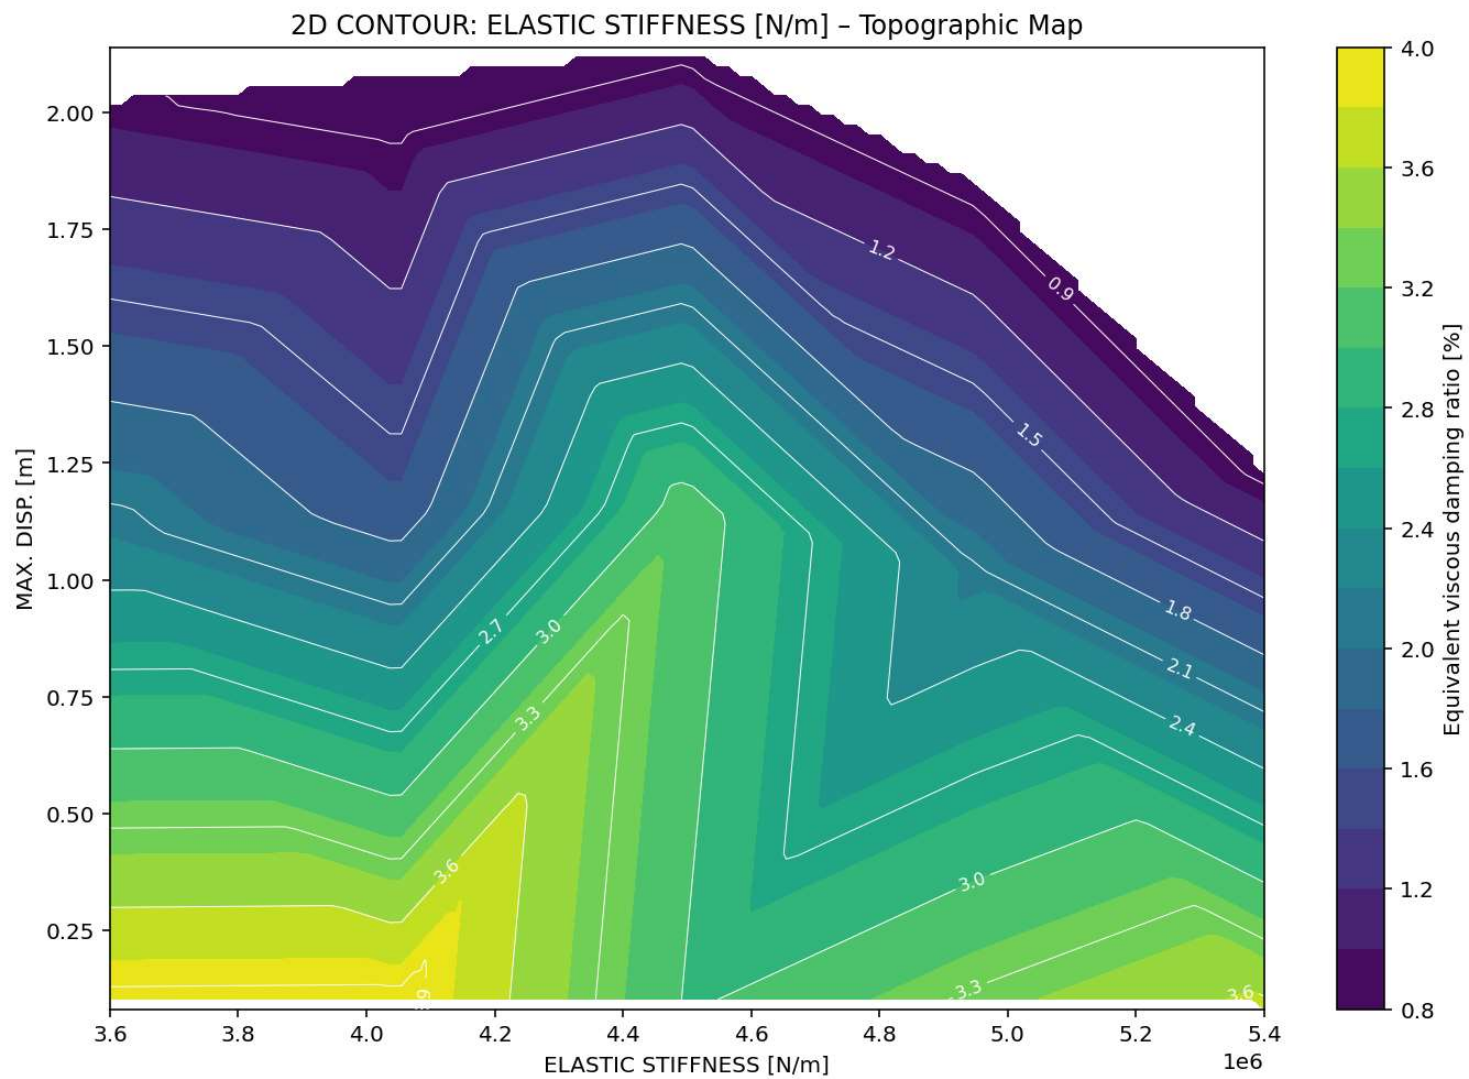



3D CONTOUR: DUCTILITY RATIO [m/m] - OVER-STRENGTH FACTOR [N/N] - Equivalent viscous damping ratio [%]

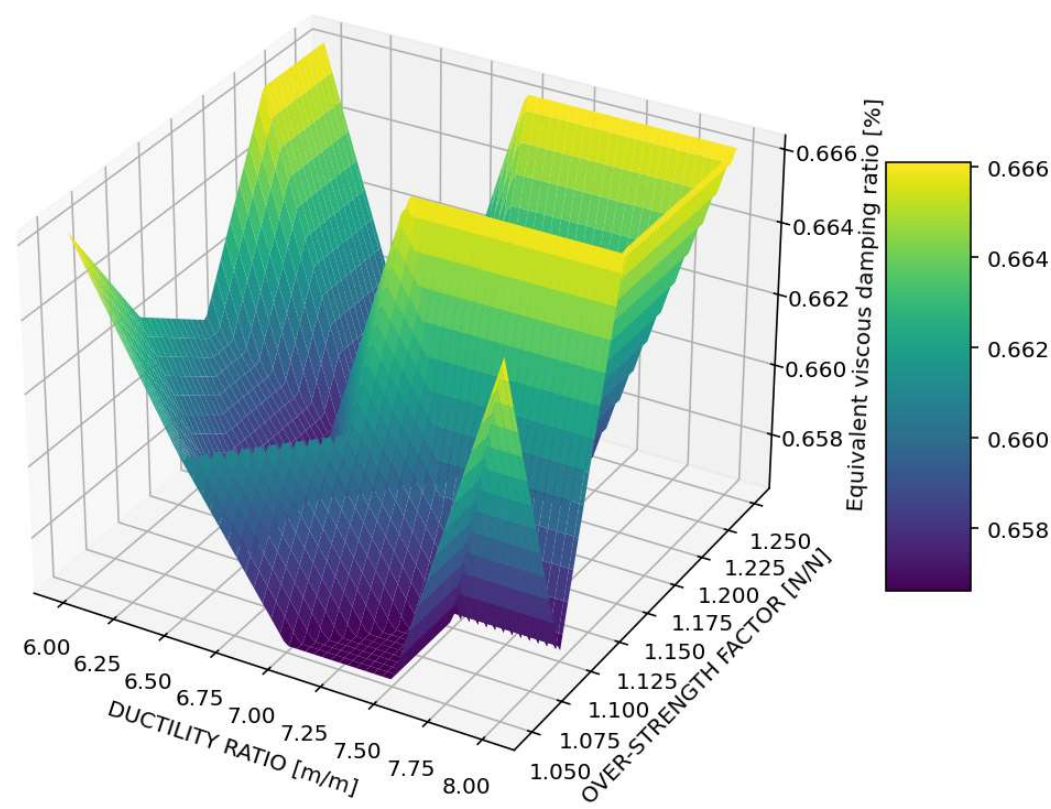

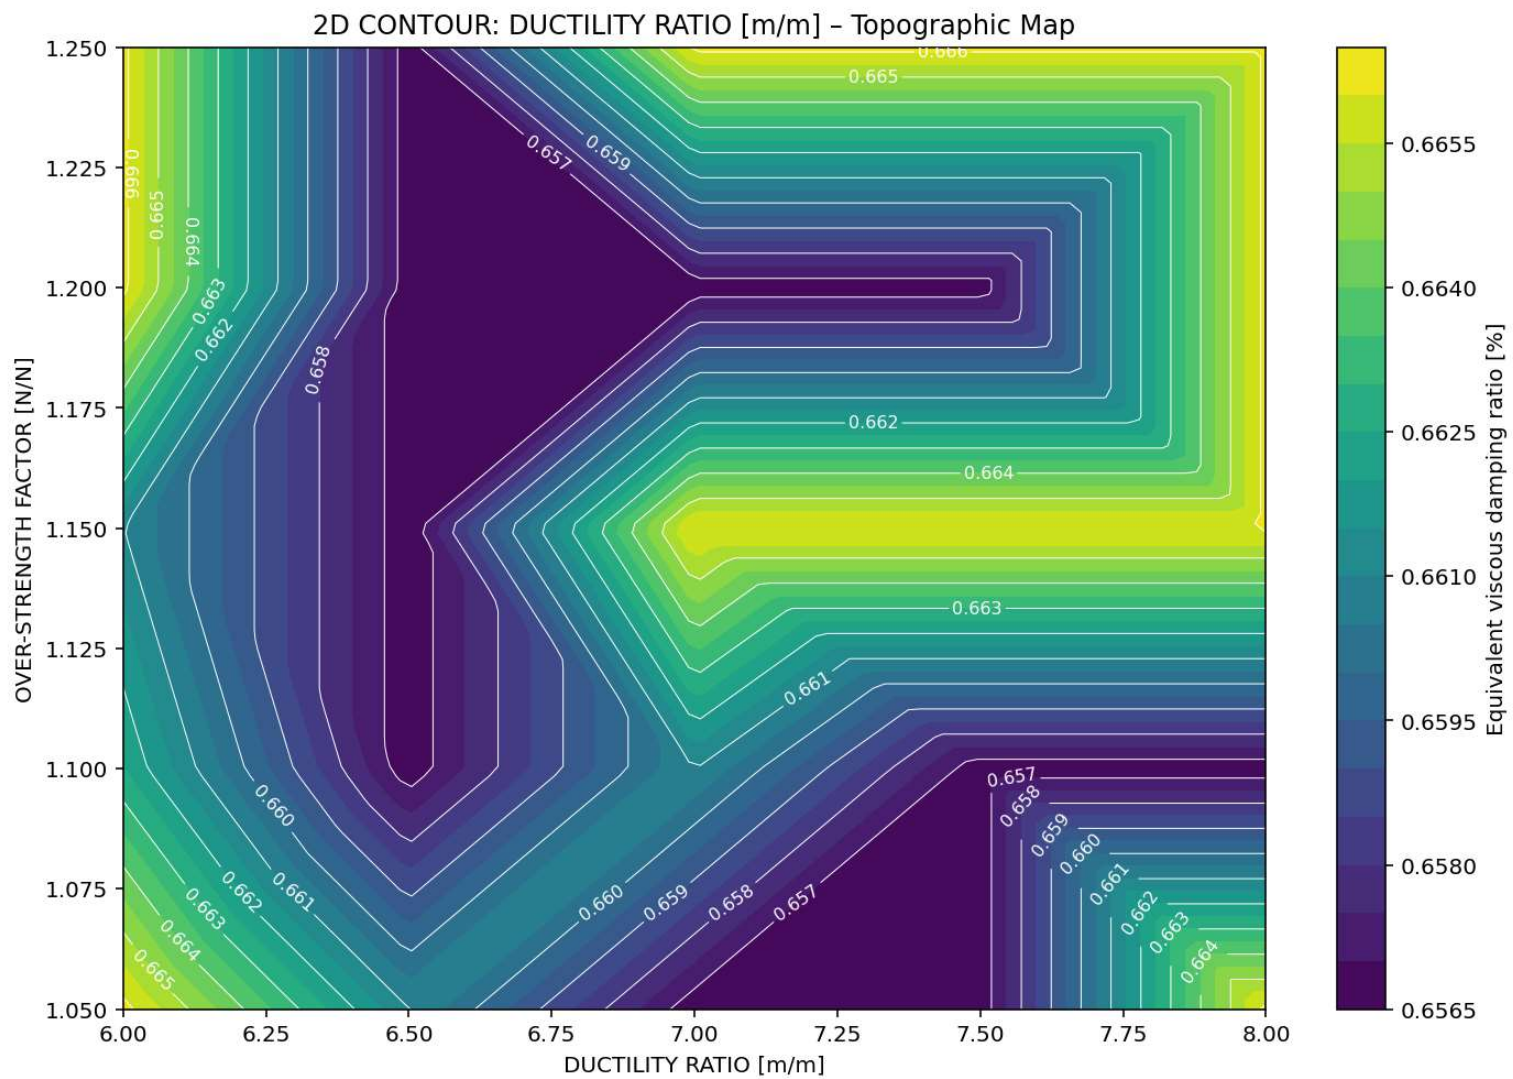



3D CONTOUR: ELASTIC STIFFNESS [N/m] - MAX. ACCELERATION [m/s²] - STRUCTURAL PERIOD [s]

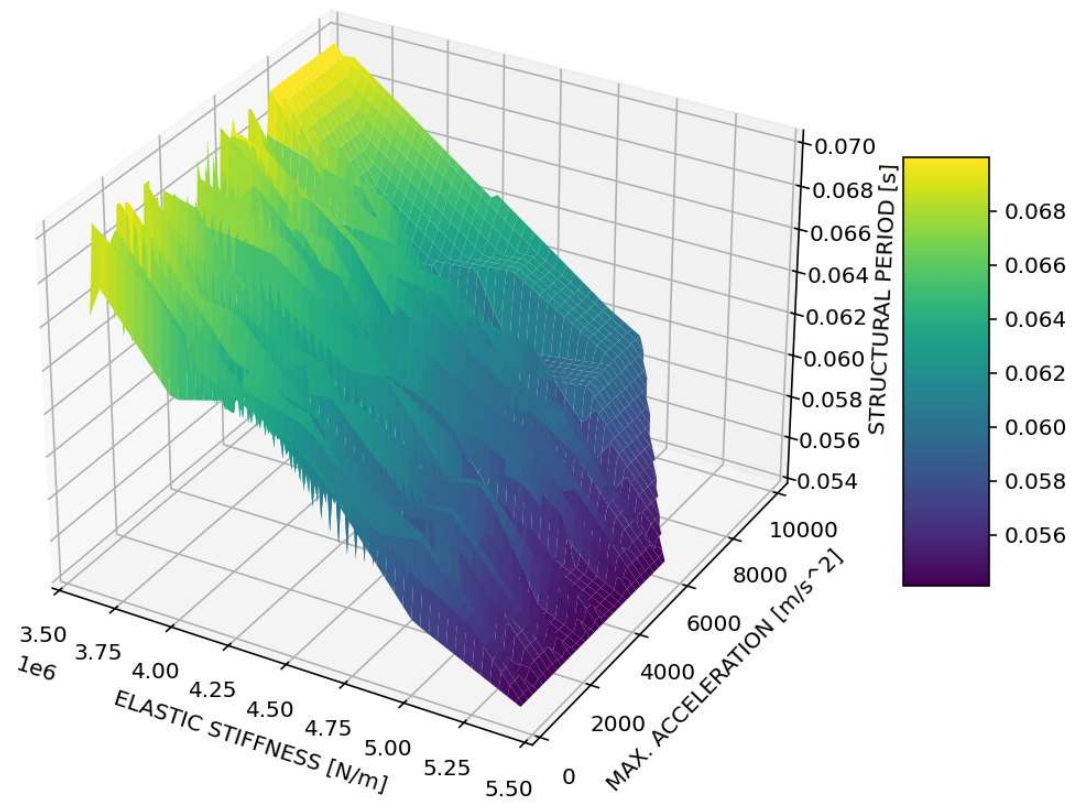

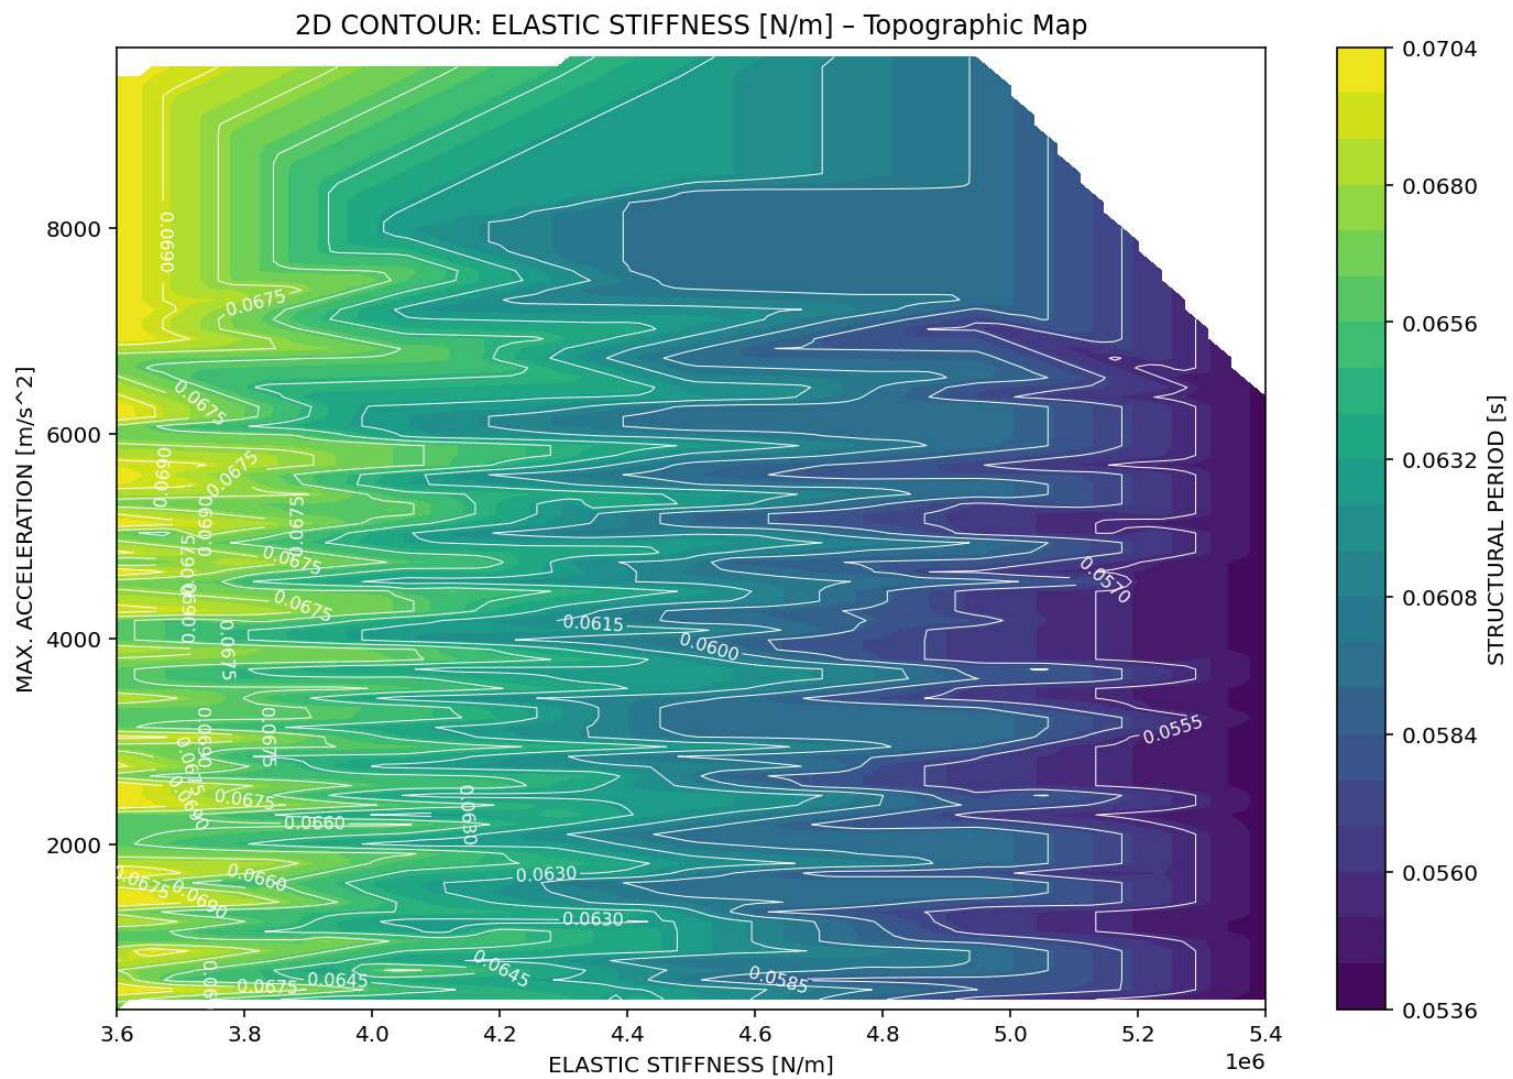



3D CONTOUR: ELASTIC STIFFNESS [N/m] - MAX. VELOCITY [m/s] - STRUCTURAL PERIOD [s]

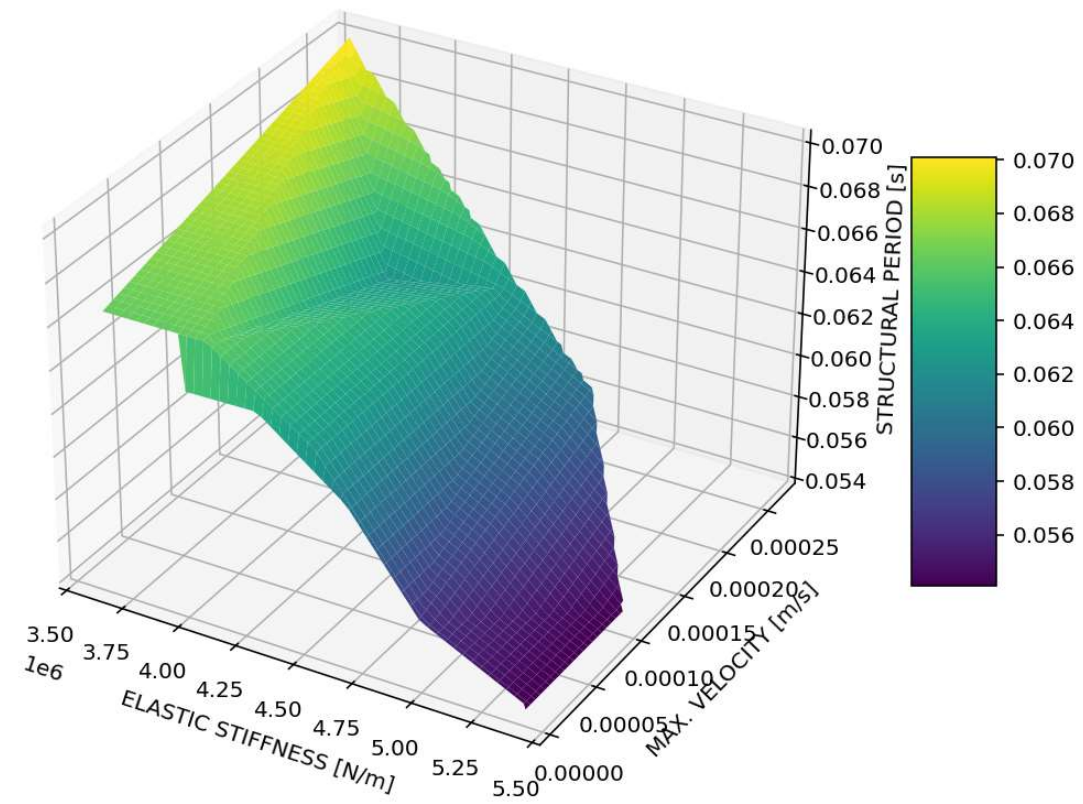

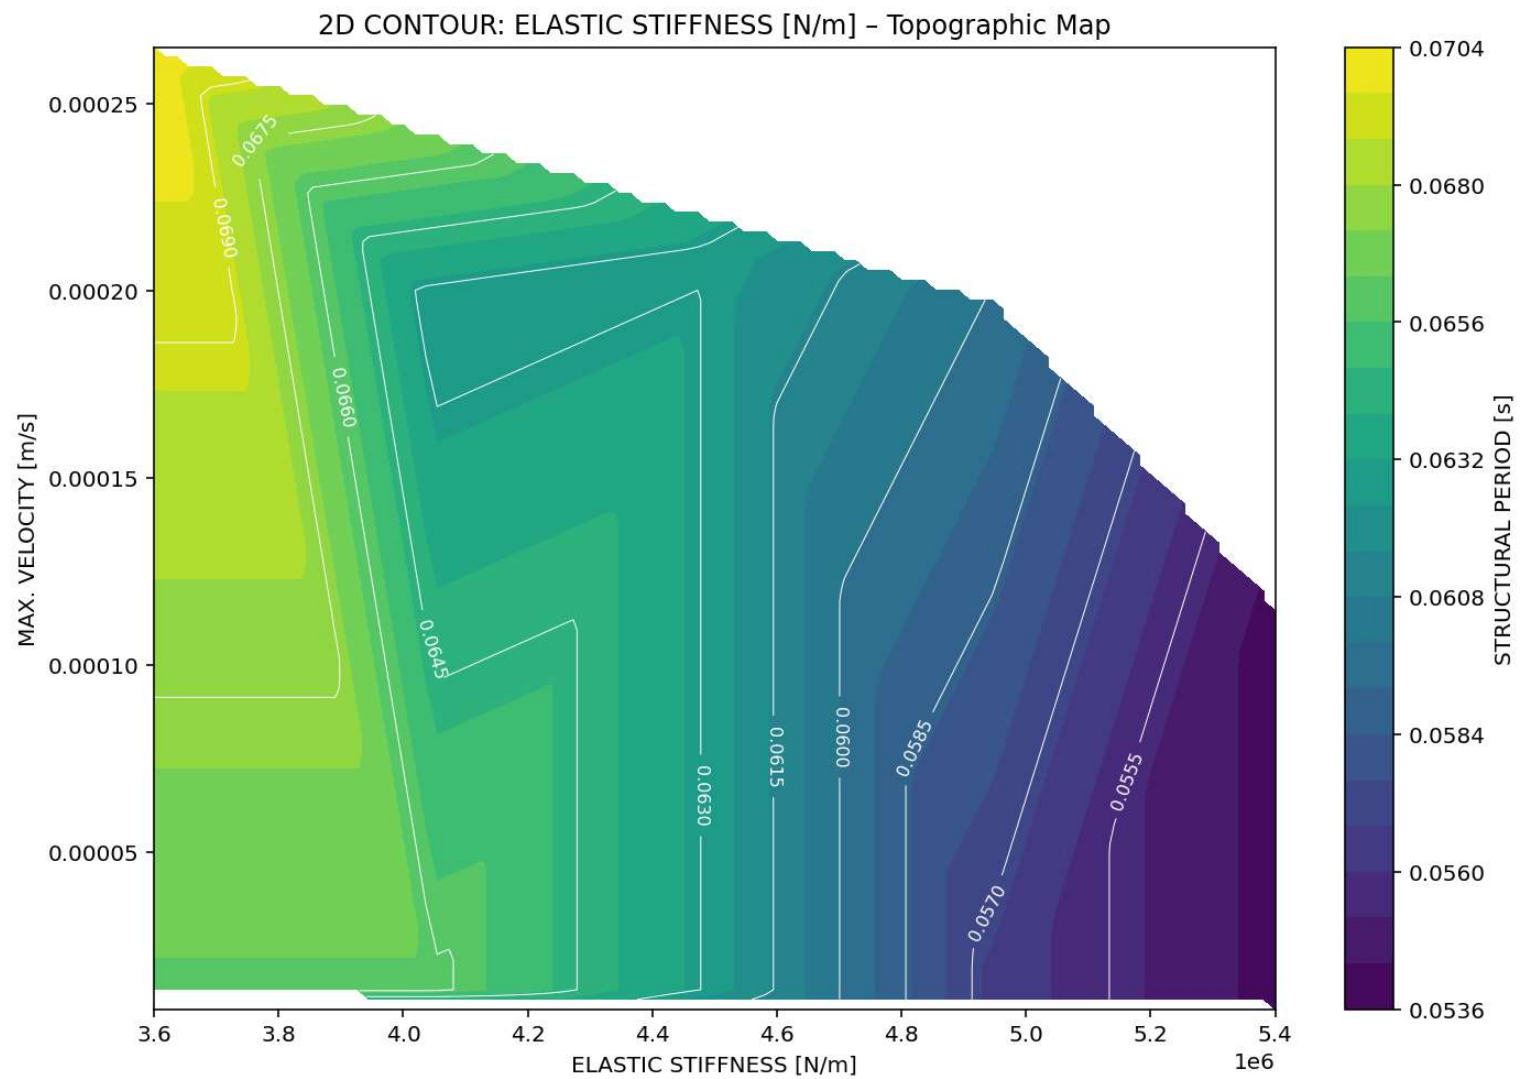



3D CONTOUR: ELASTIC STIFFNESS [N/m] - MAX. DISP. [m] - STRUCTURAL PERIOD [s]

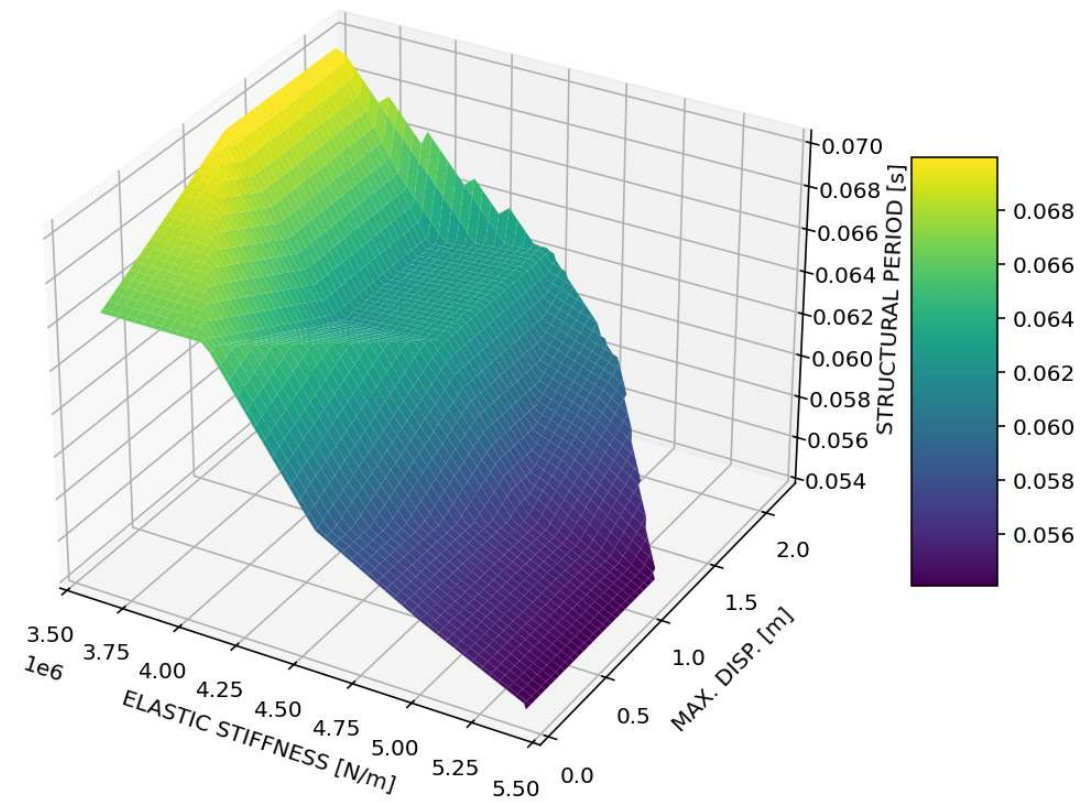

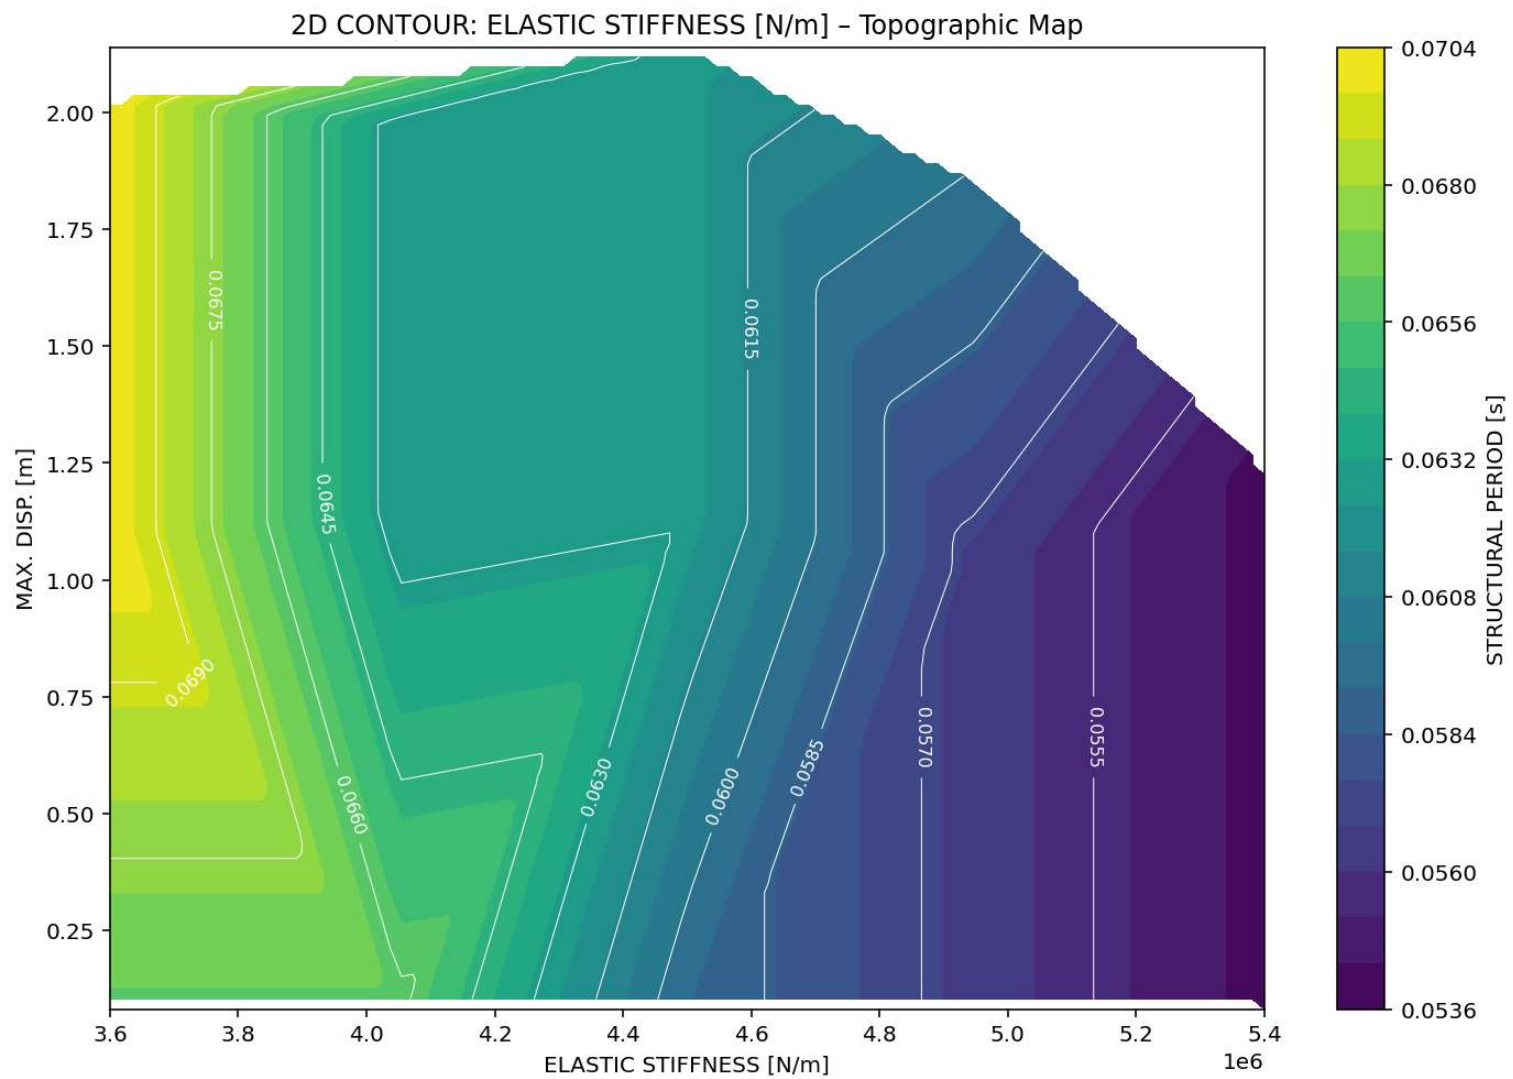



3D CONTOUR: DUCTILITY RATIO [m/m] - OVER-STRENGTH FACTOR [N/N] - STRUCTURAL PERIOD [s]

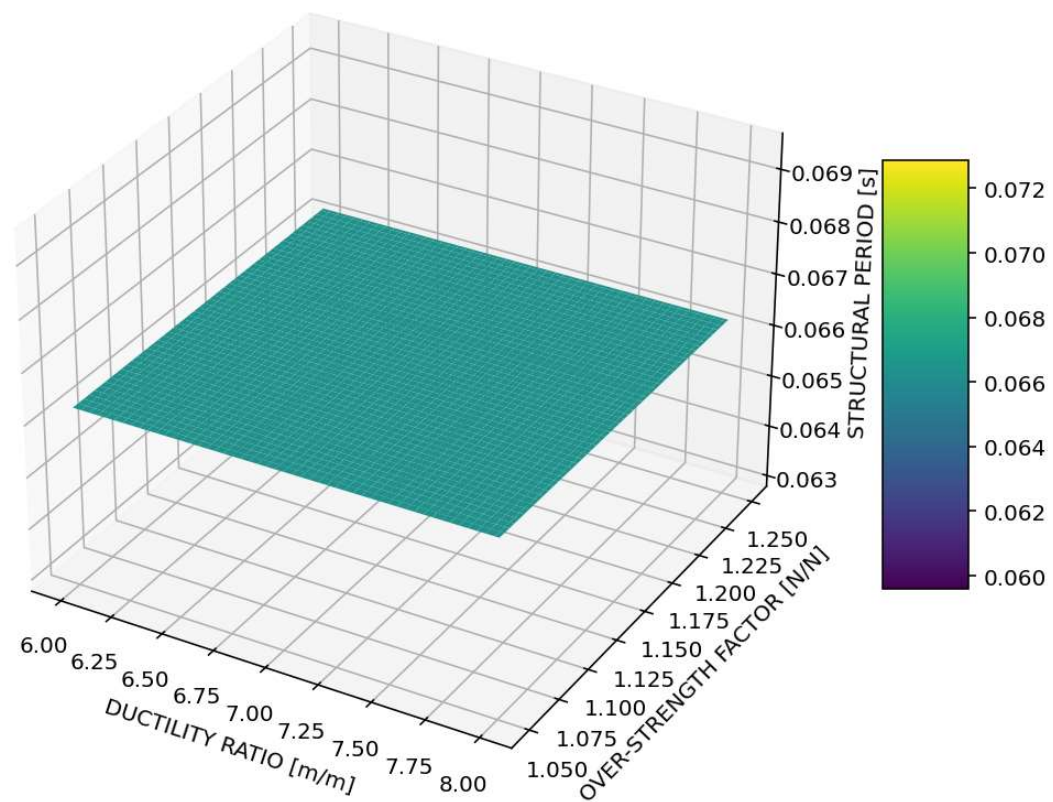

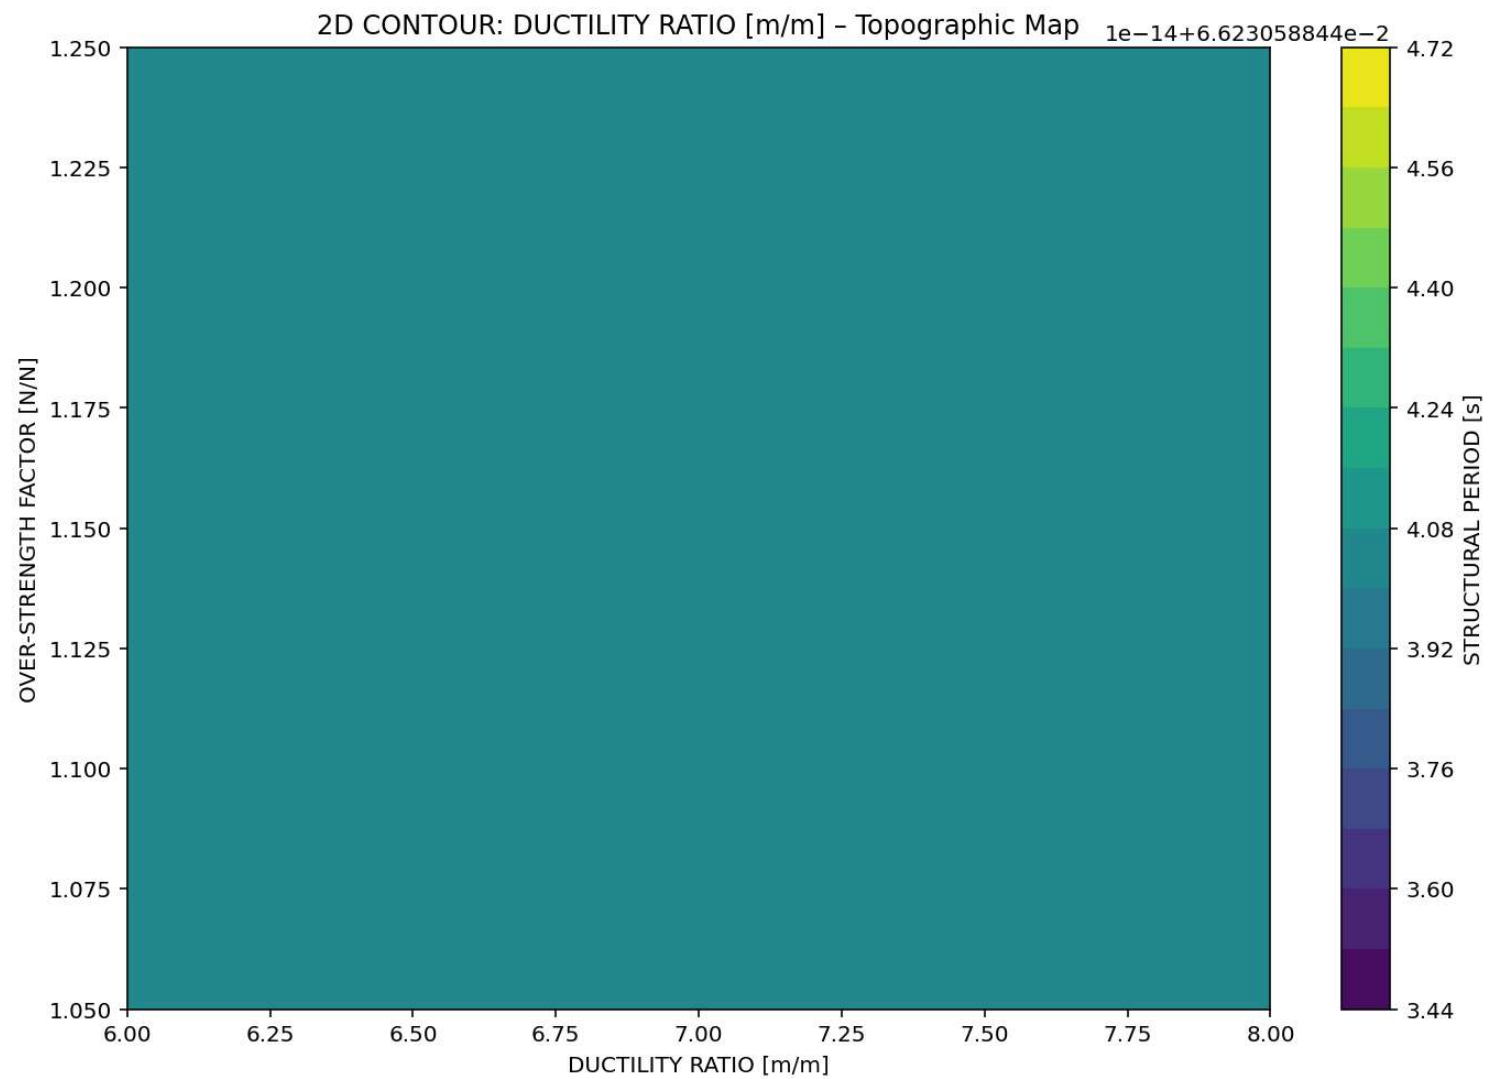



3D CONTOUR: ELASTIC STIFFNESS [N/m] - MASS [kg] - STRUCTURAL PERIOD [s]

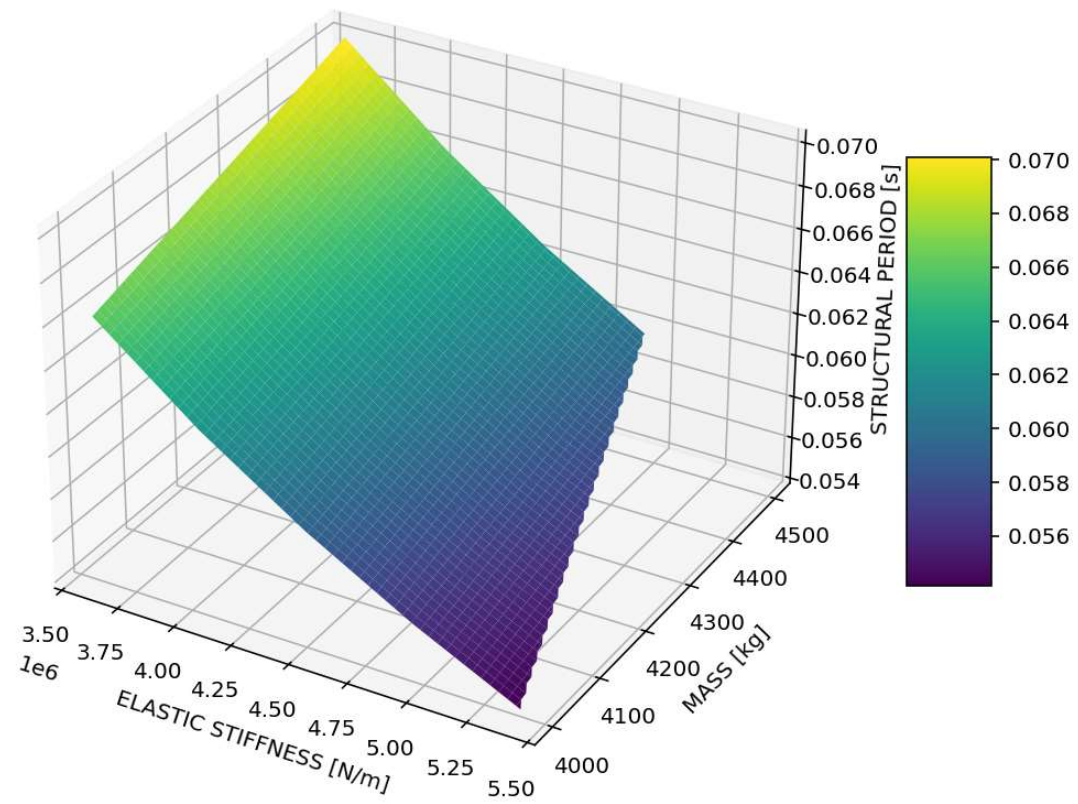

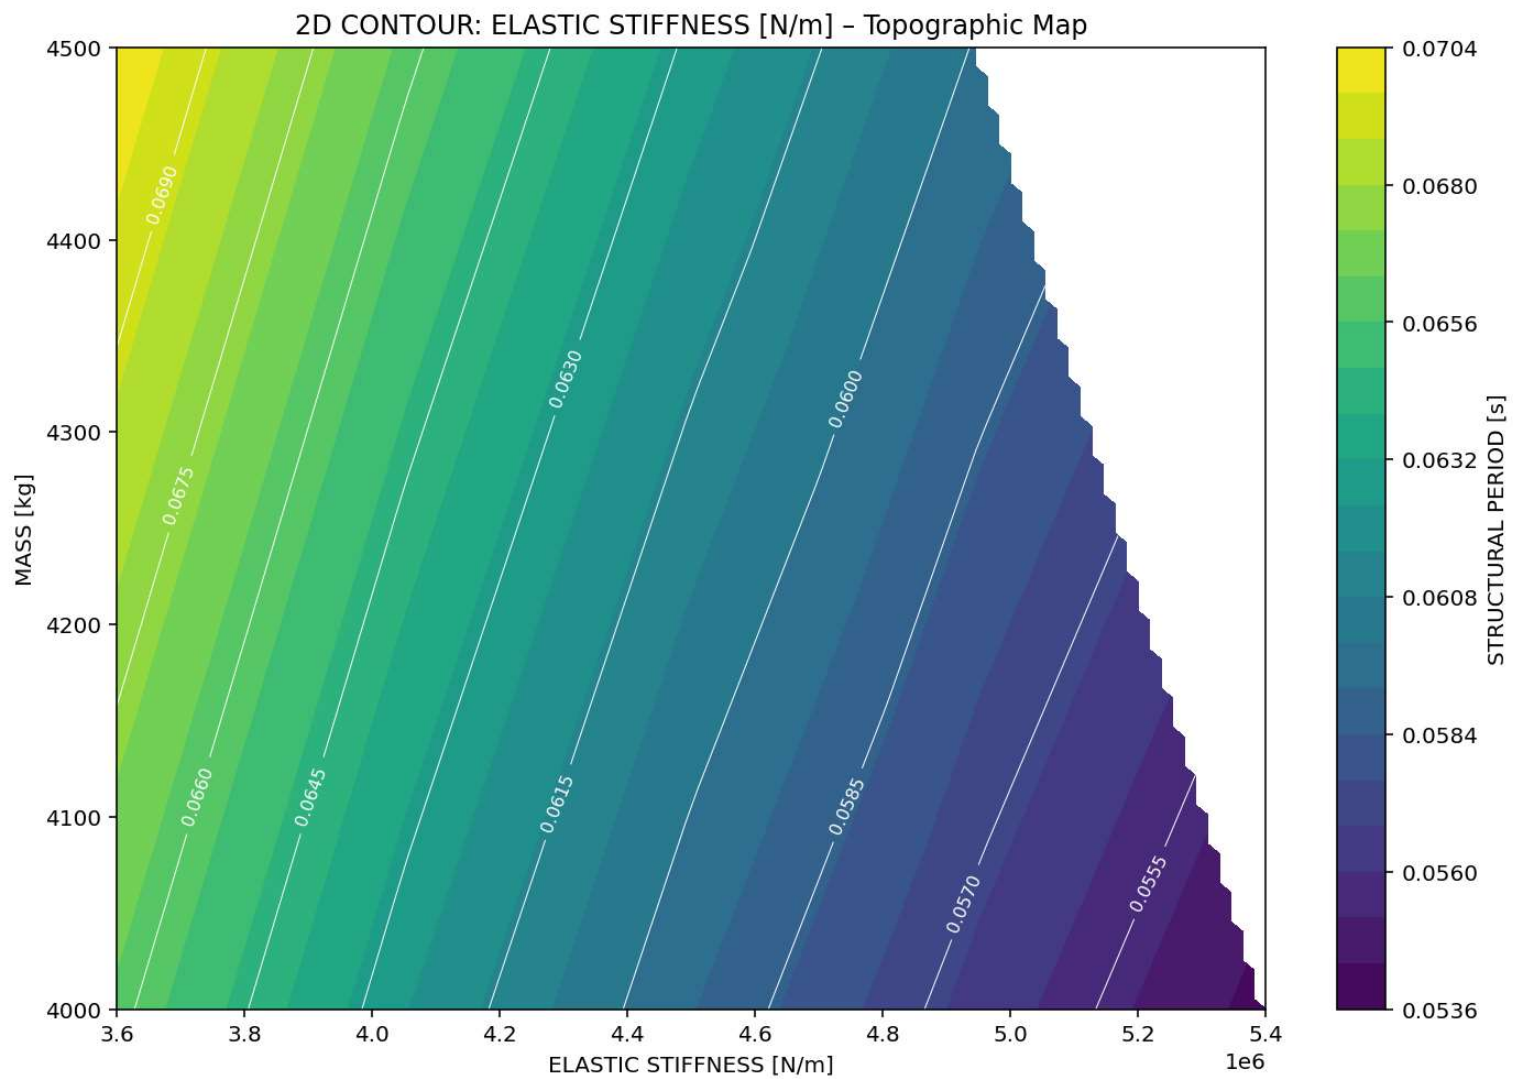



3D CONTOUR: ELASTIC STIFFNESS [N/m] - MASS [kg] - Equivalent viscous damping ratio [%]

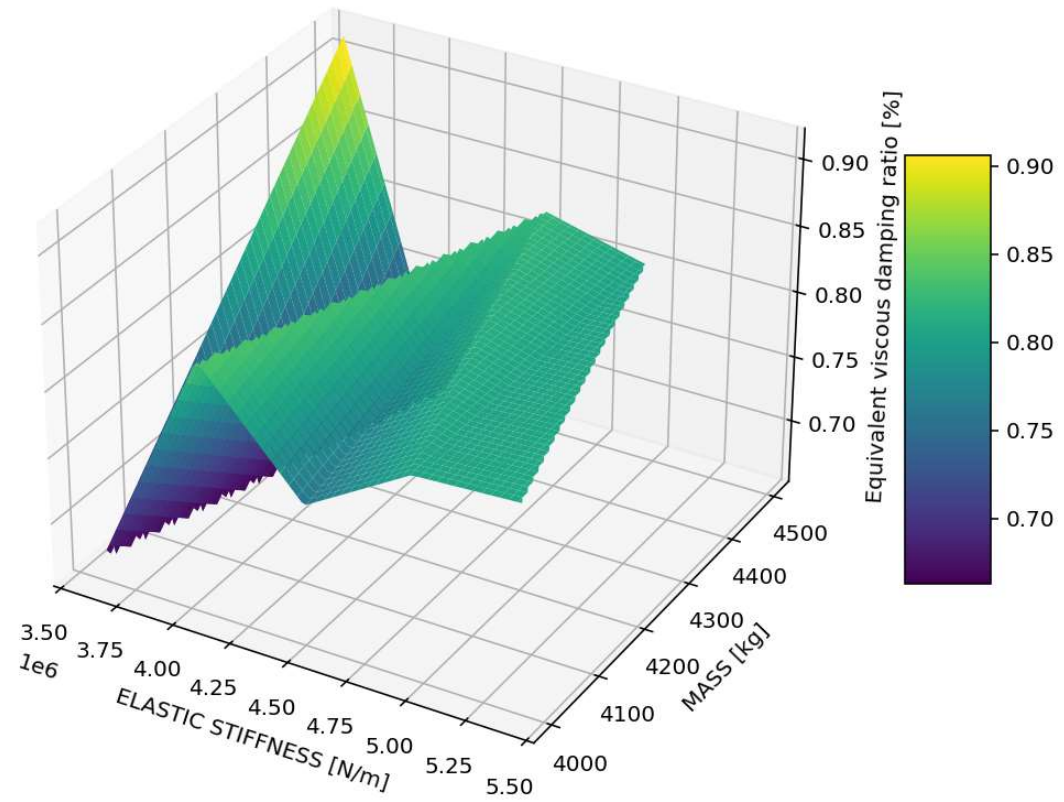

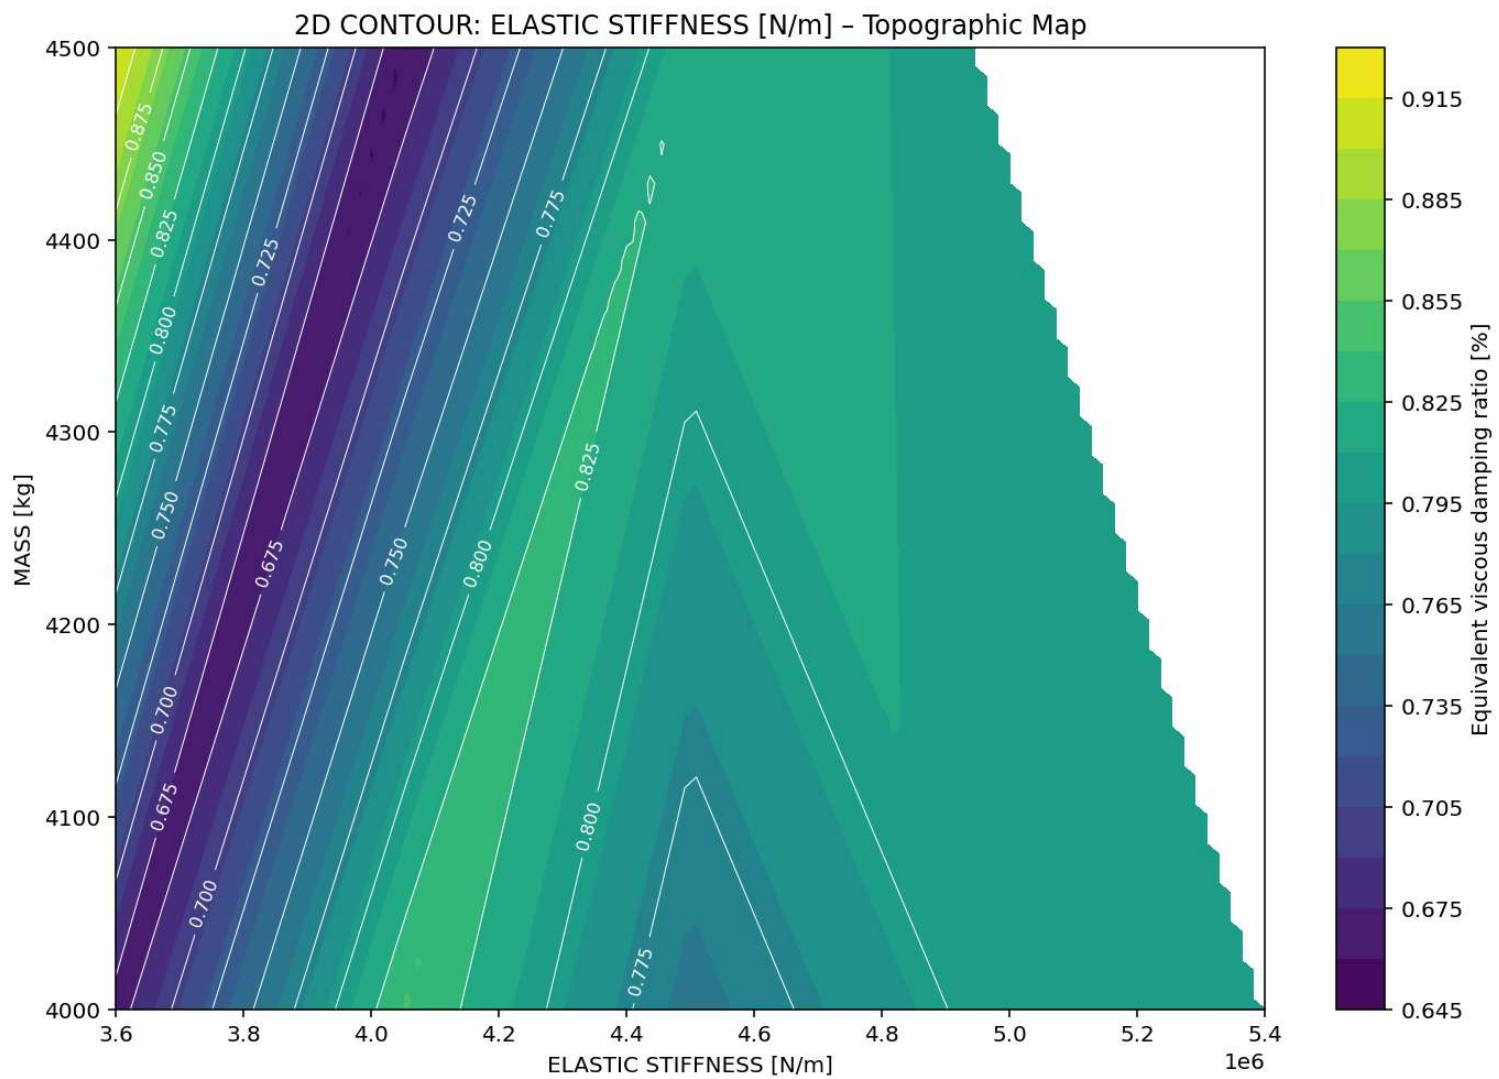



3D CONTOUR: ELASTIC STIFFNESS [N/m] - MASS [kg] - MAX. DISP. [m]

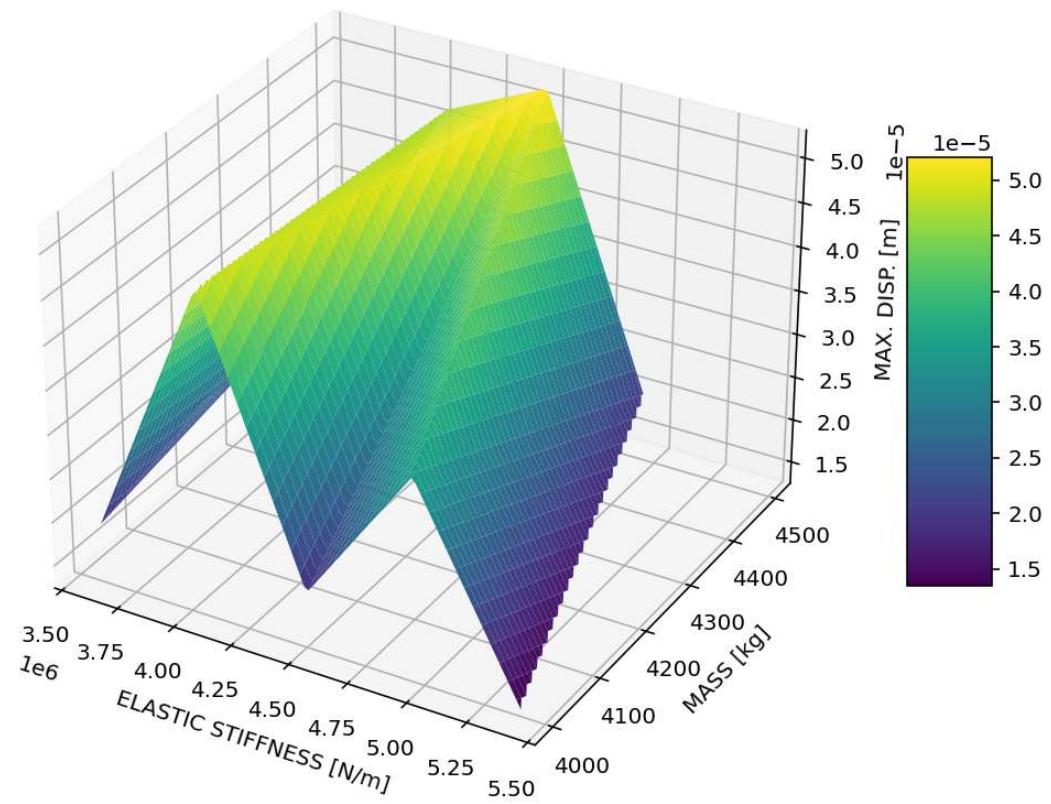

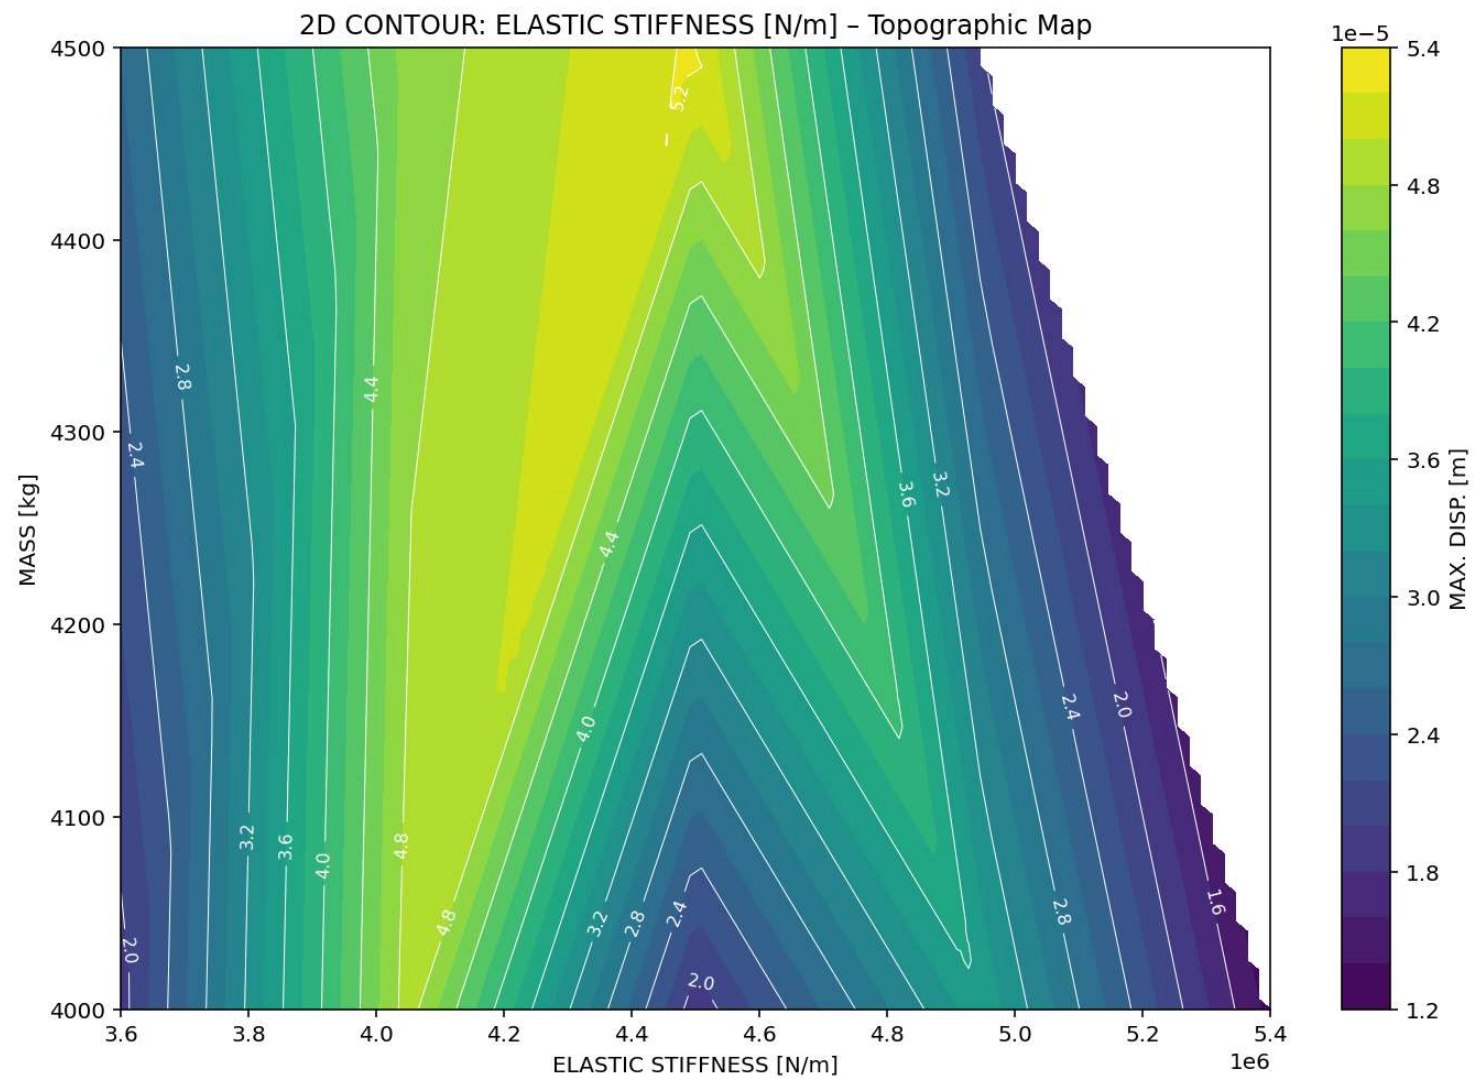



3D CONTOUR: ELASTIC STIFFNESS [N/m] - MASS [kg] - MAX. VELOCITY [m/s]

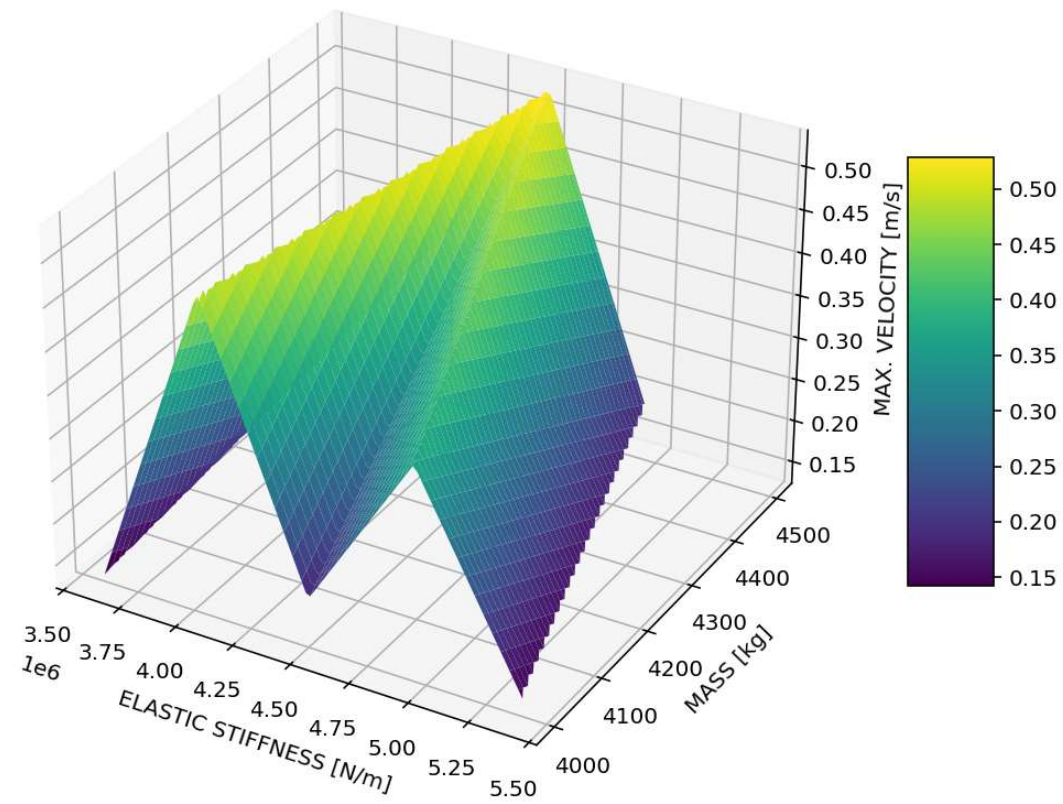

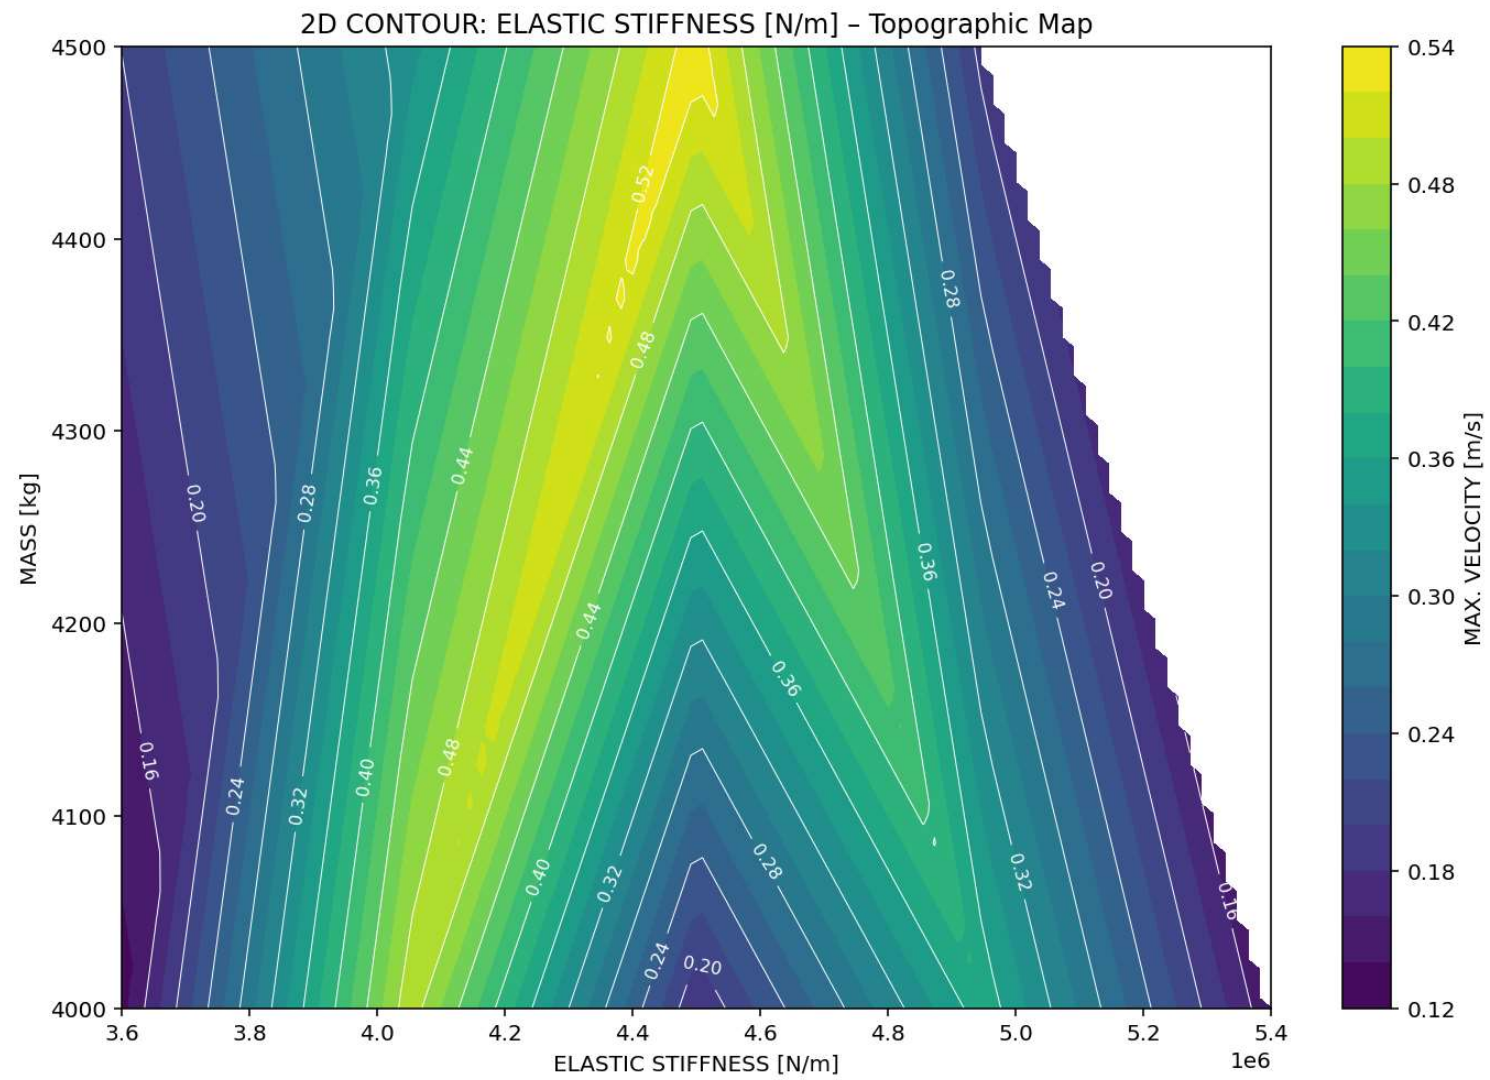



3D CONTOUR: ELASTIC STIFFNESS [N/m] - MASS [kg] - MAX. ACCELERATION [m/s²]

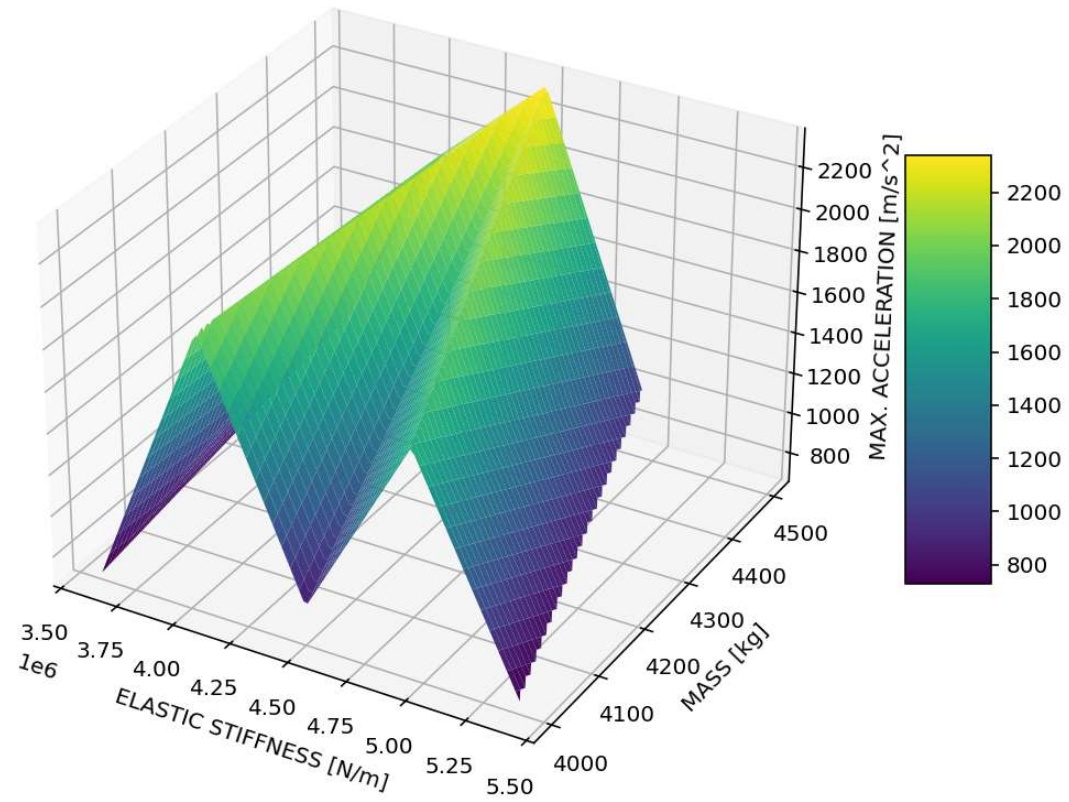

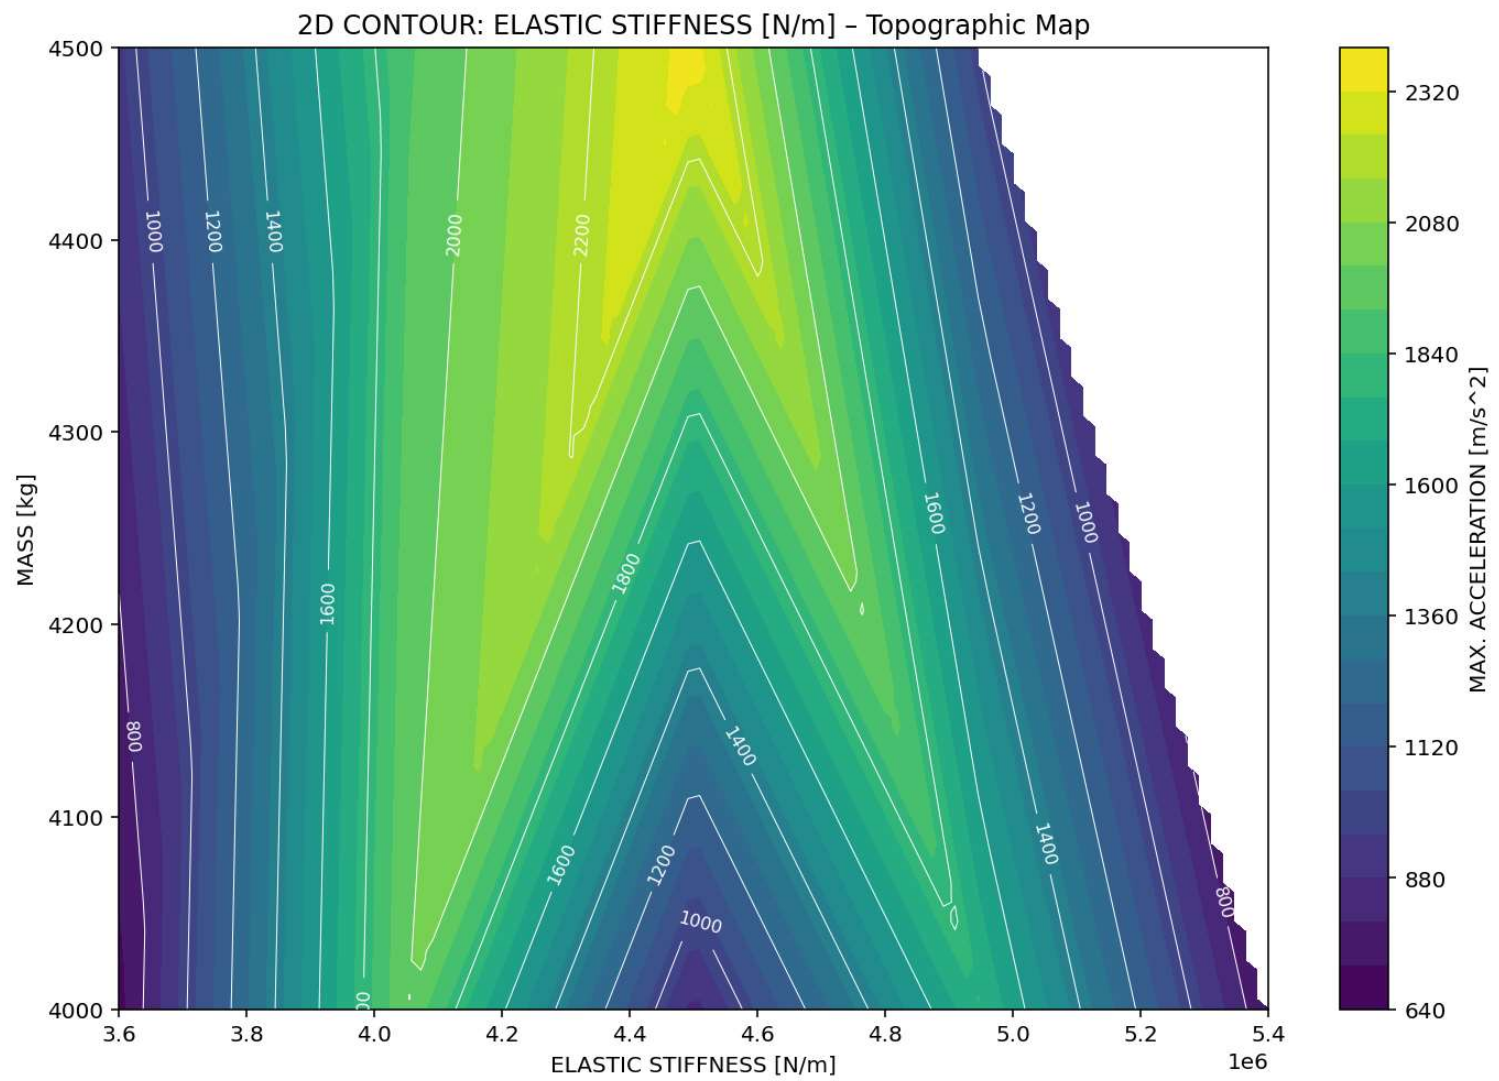



3D CONTOUR: GRAVITY COEFFICIENT - MASS [kg] - STRUCTURAL PERIOD [s]

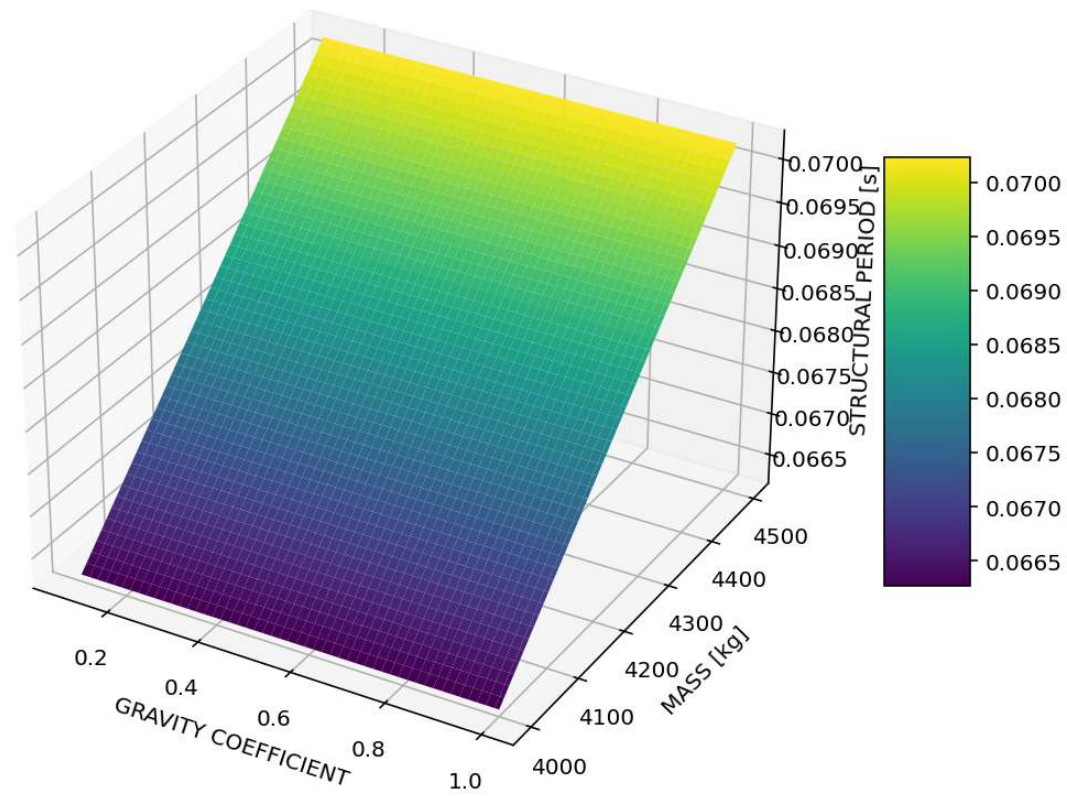

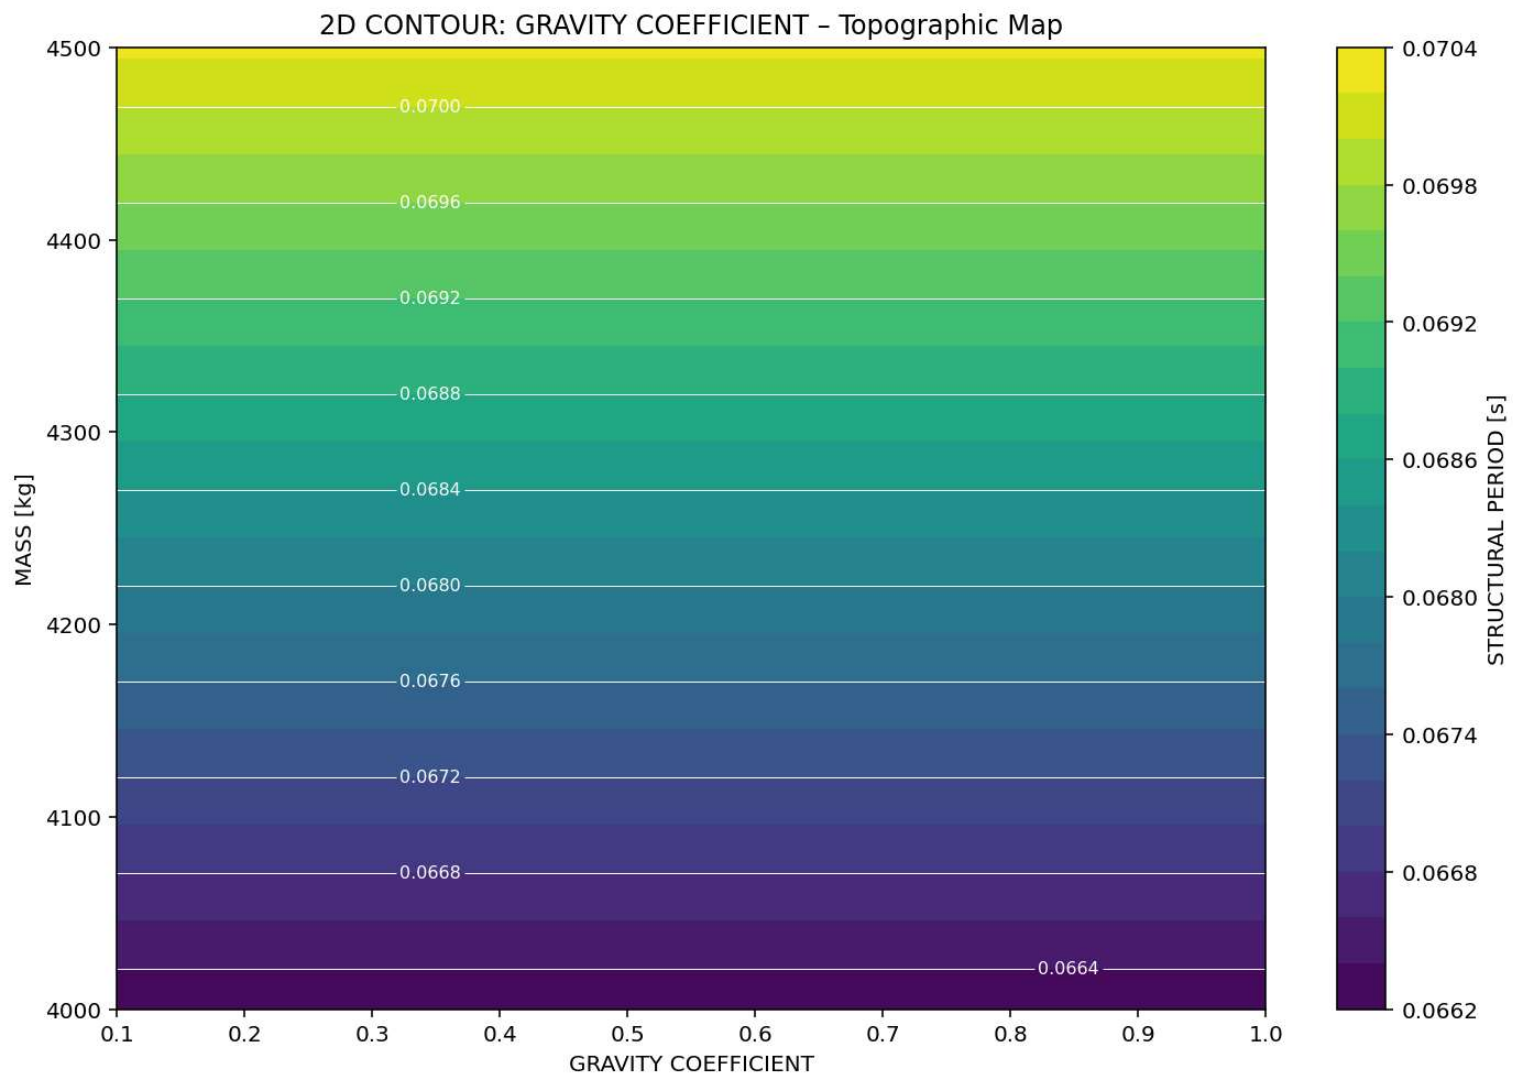



3D CONTOUR: GRAVITY COEFFICIENT - MASS [kg] - Equivalent viscous damping ratio [%]

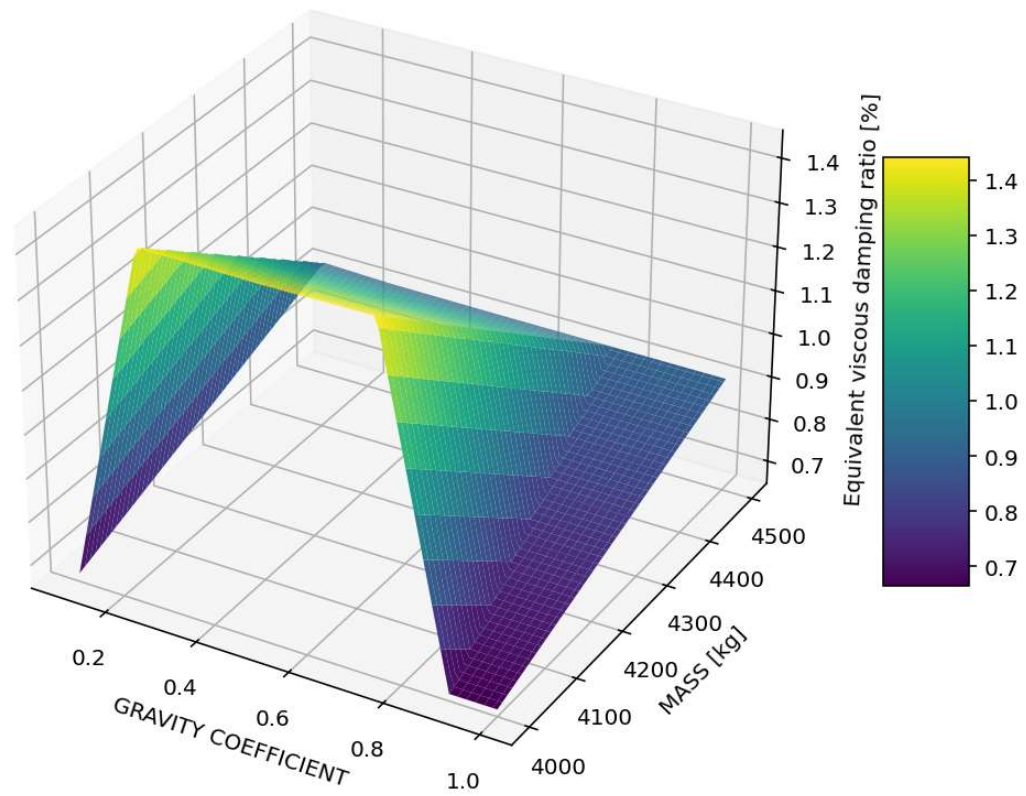

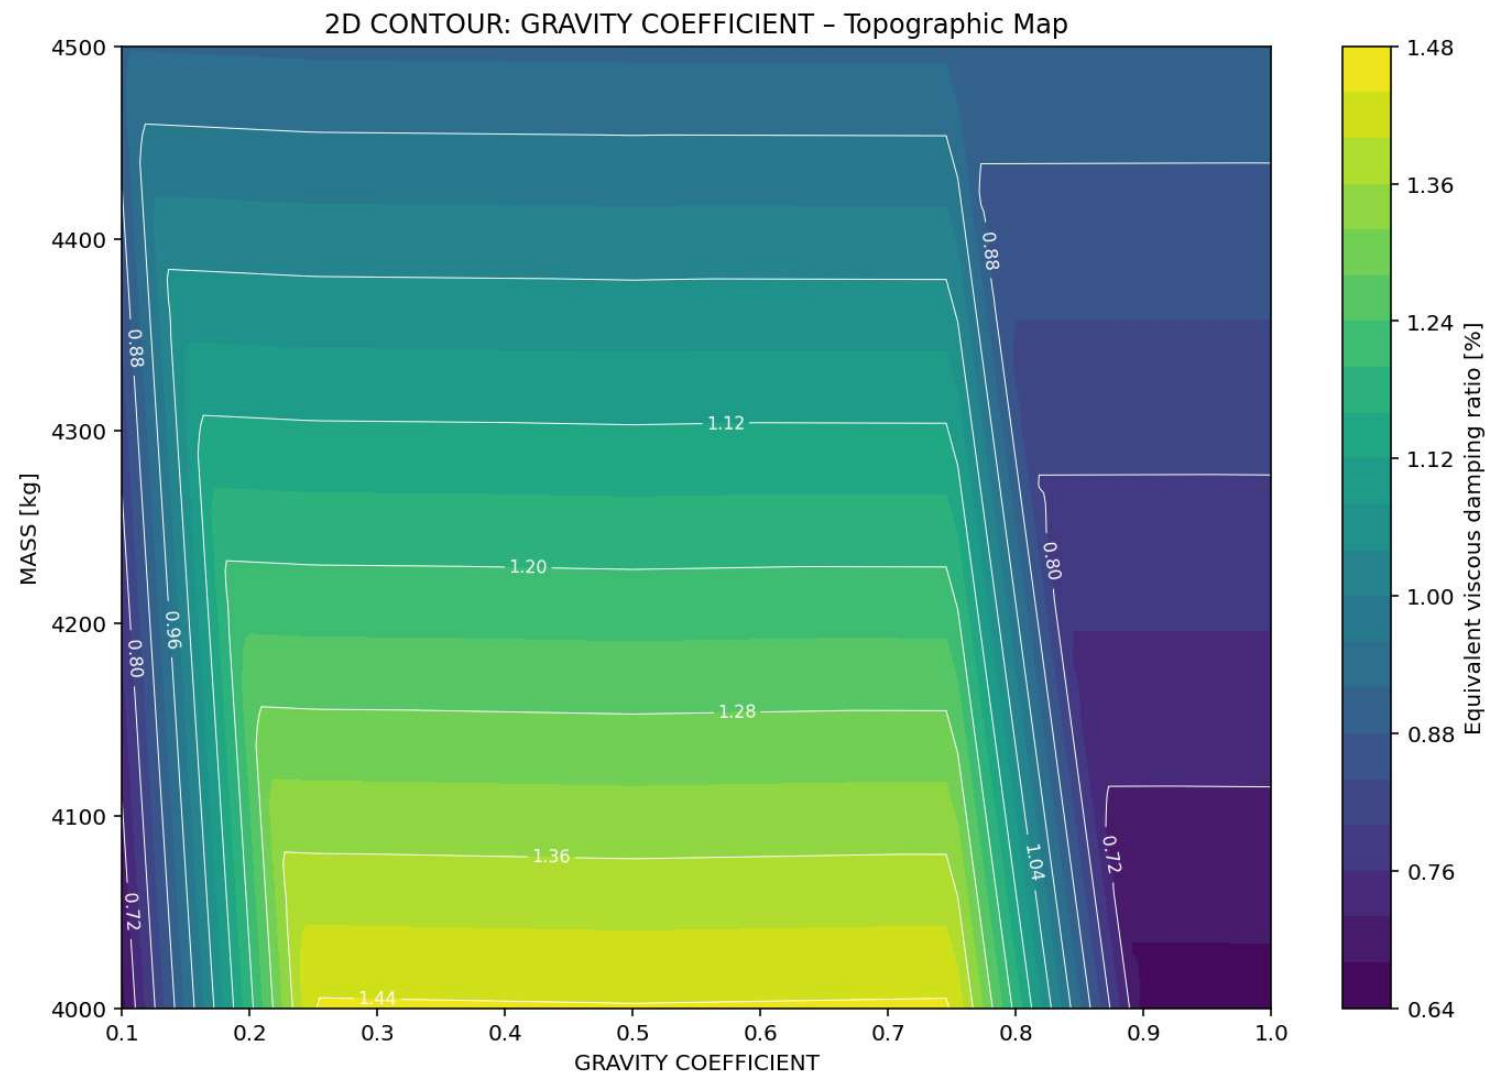



3D CONTOUR: GRAVITY COEFFICIENT - MASS [kg] - MAX. DISP. [m]

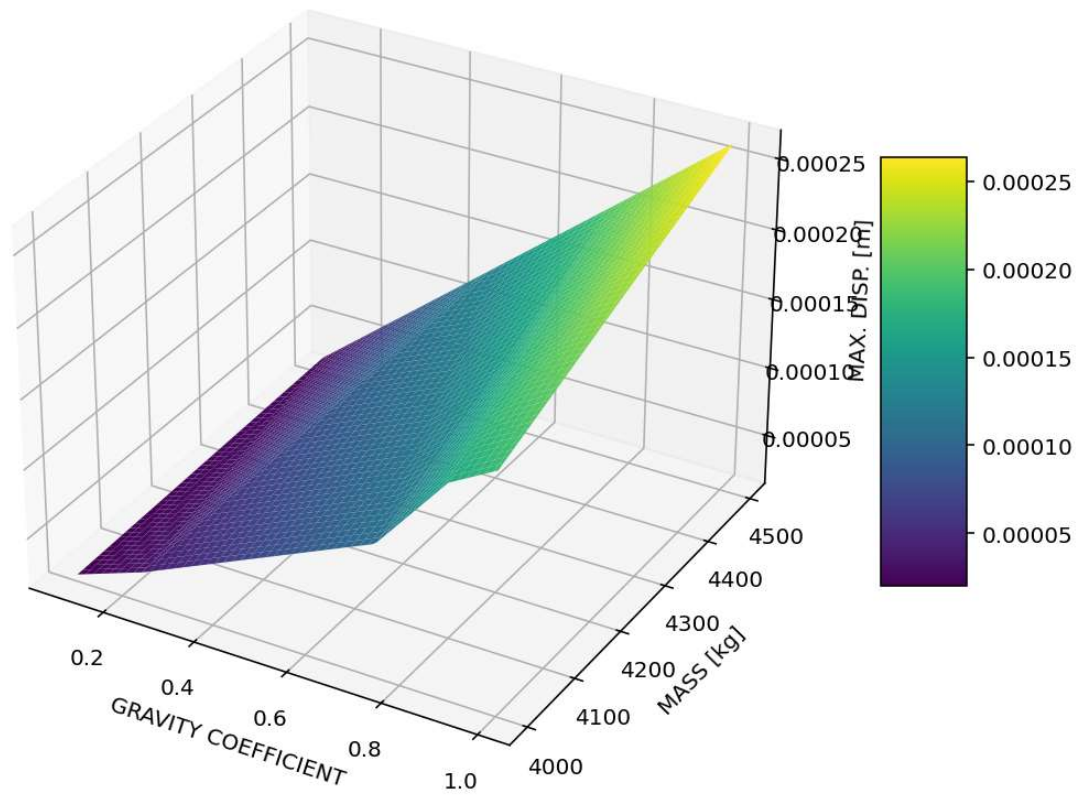

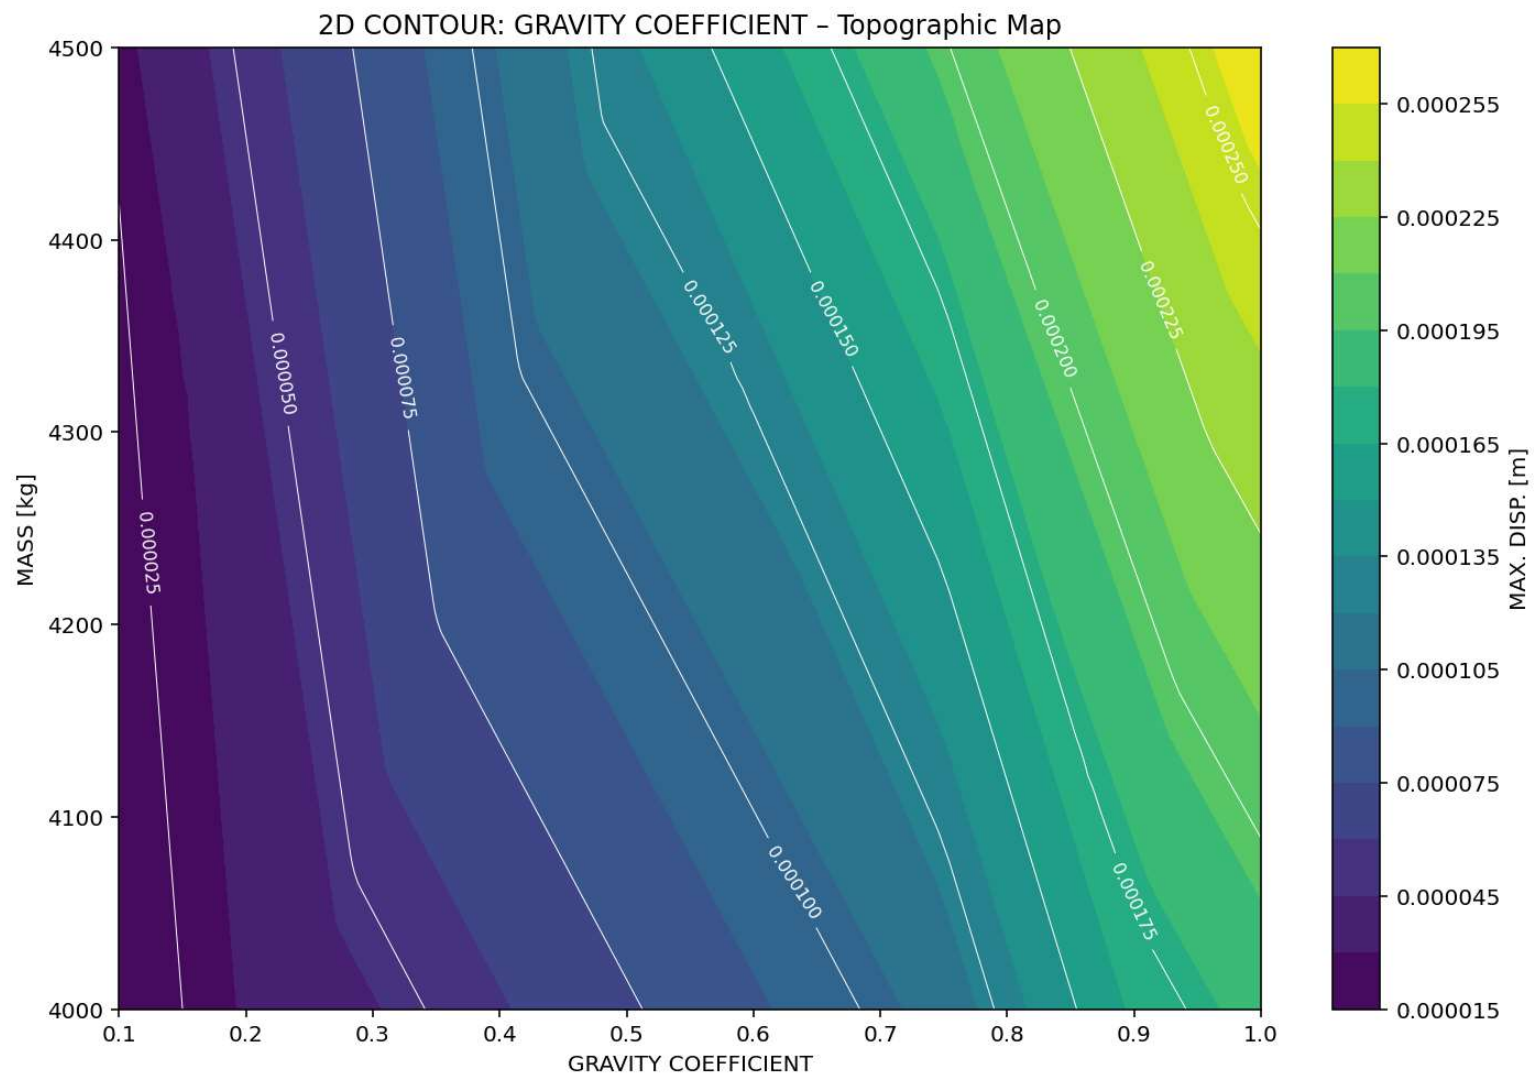



3D CONTOUR: GRAVITY COEFFICIENT - MASS [kg] - MAX. VELOCITY [m/s]

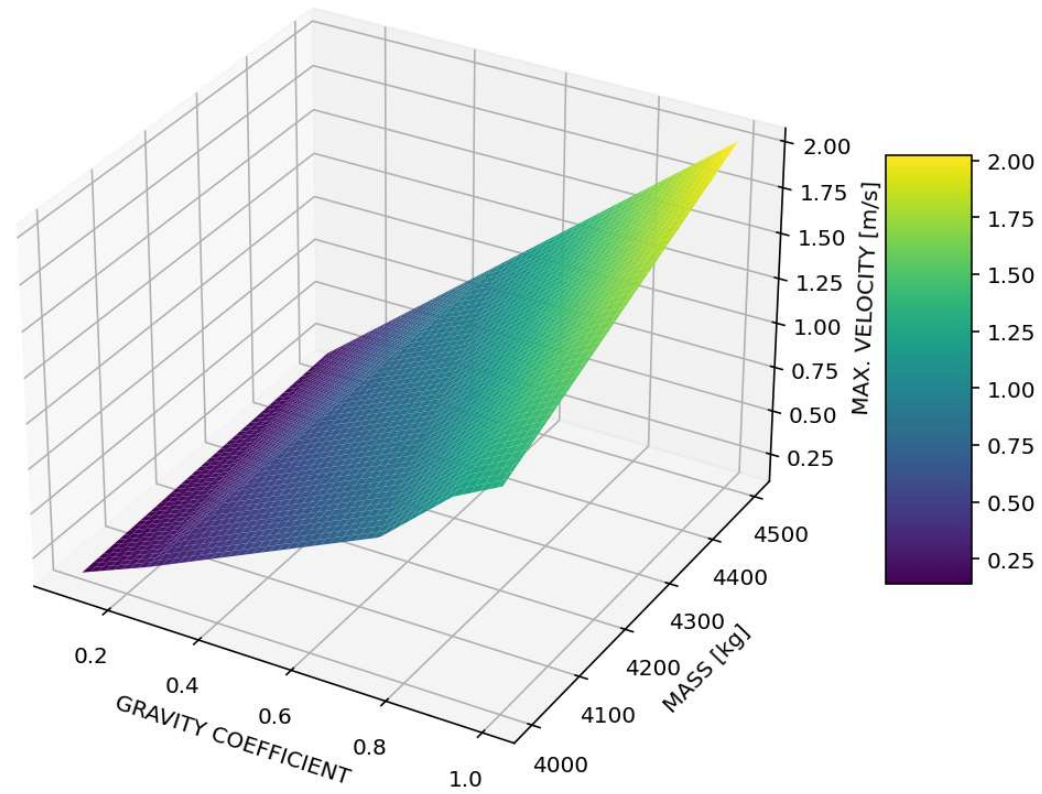


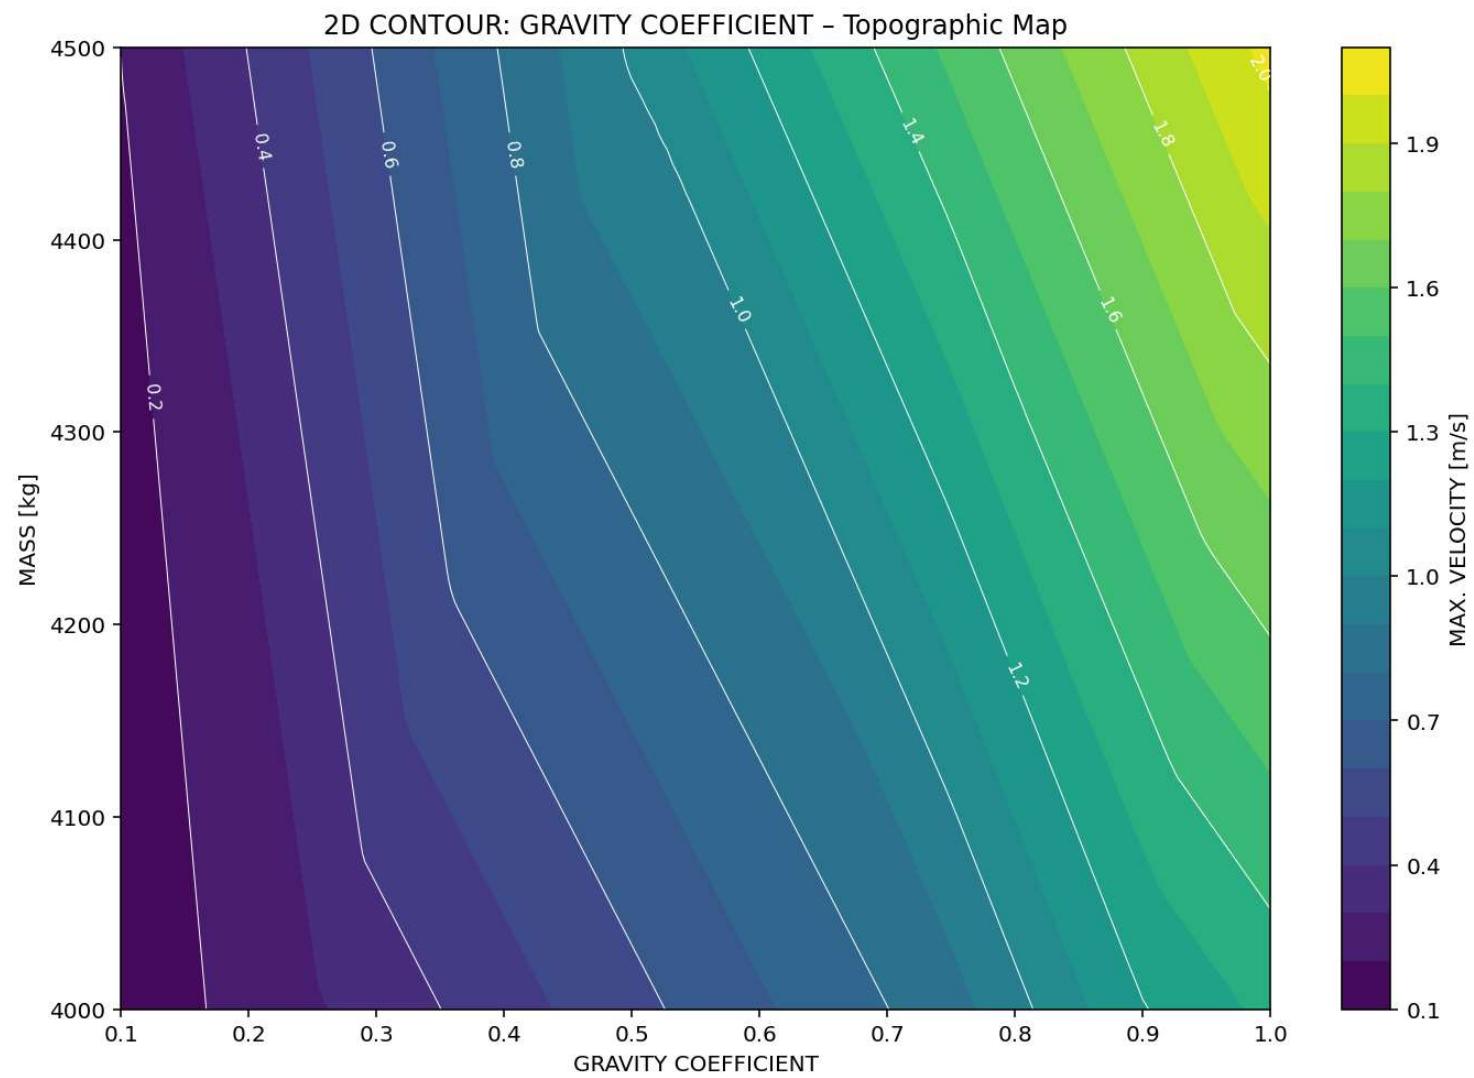



3D CONTOUR: GRAVITY COEFFICIENT - MASS [kg] - MAX. ACCELERATION [m/s²]

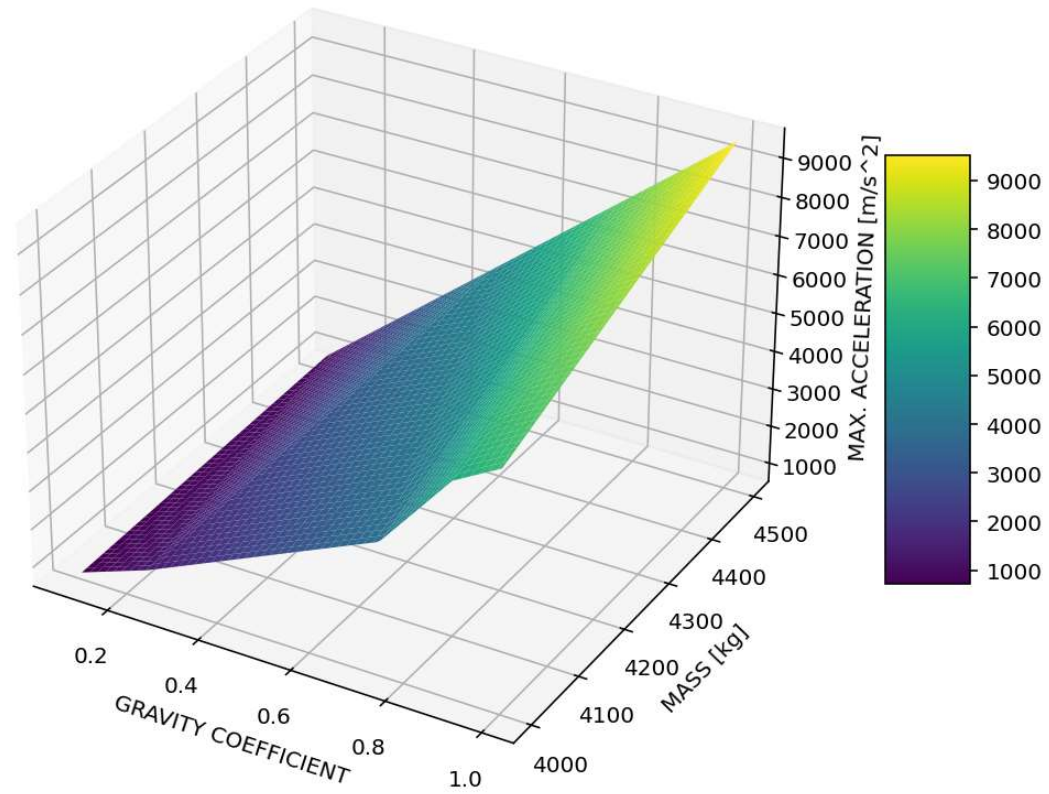

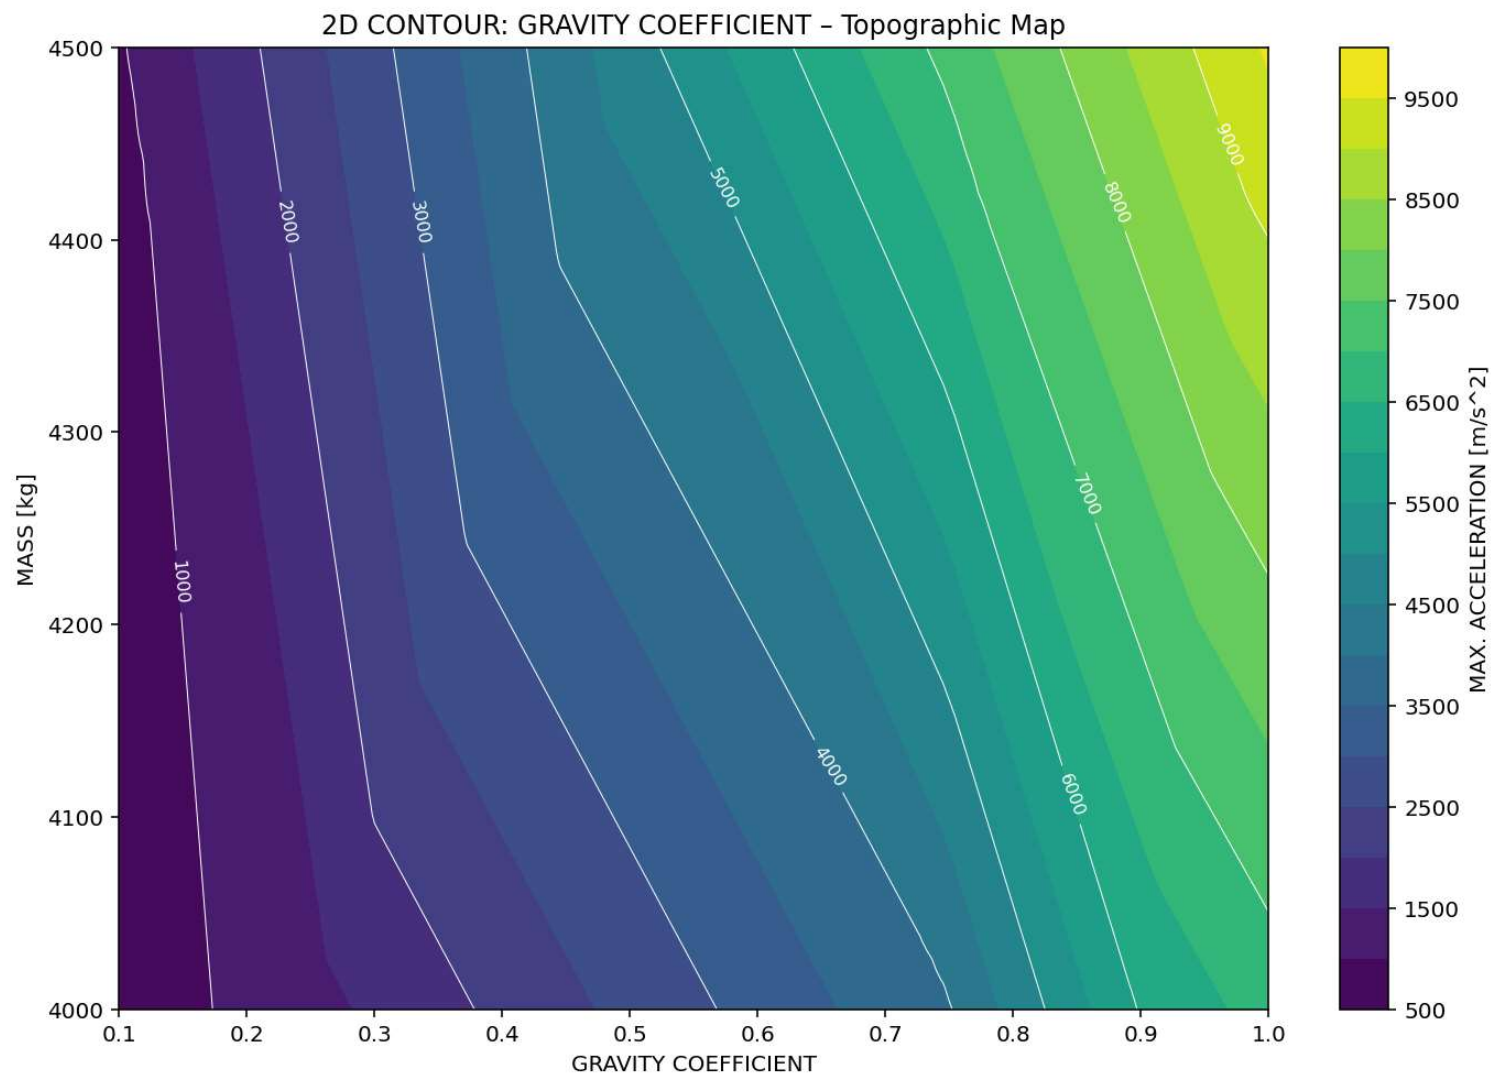


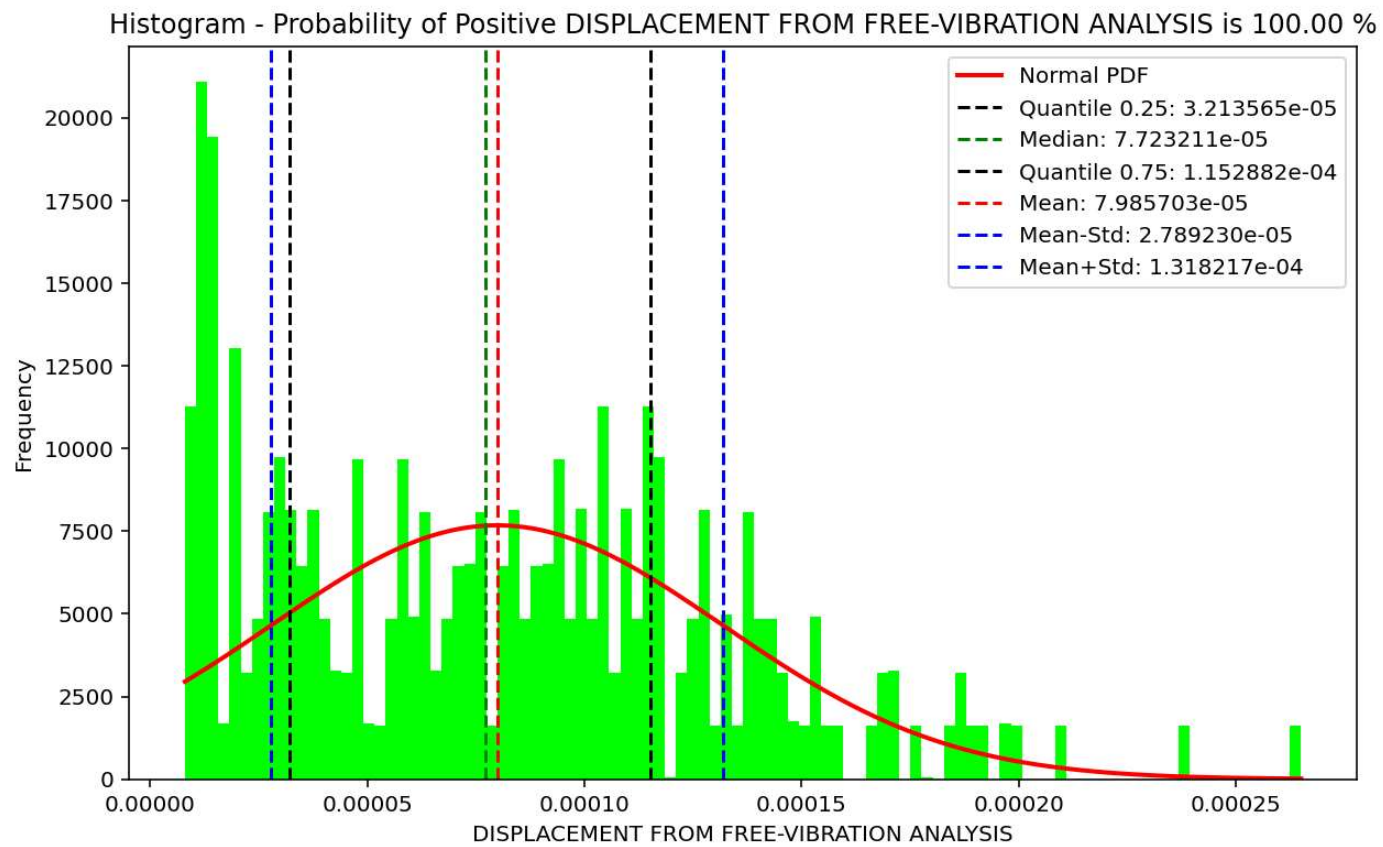


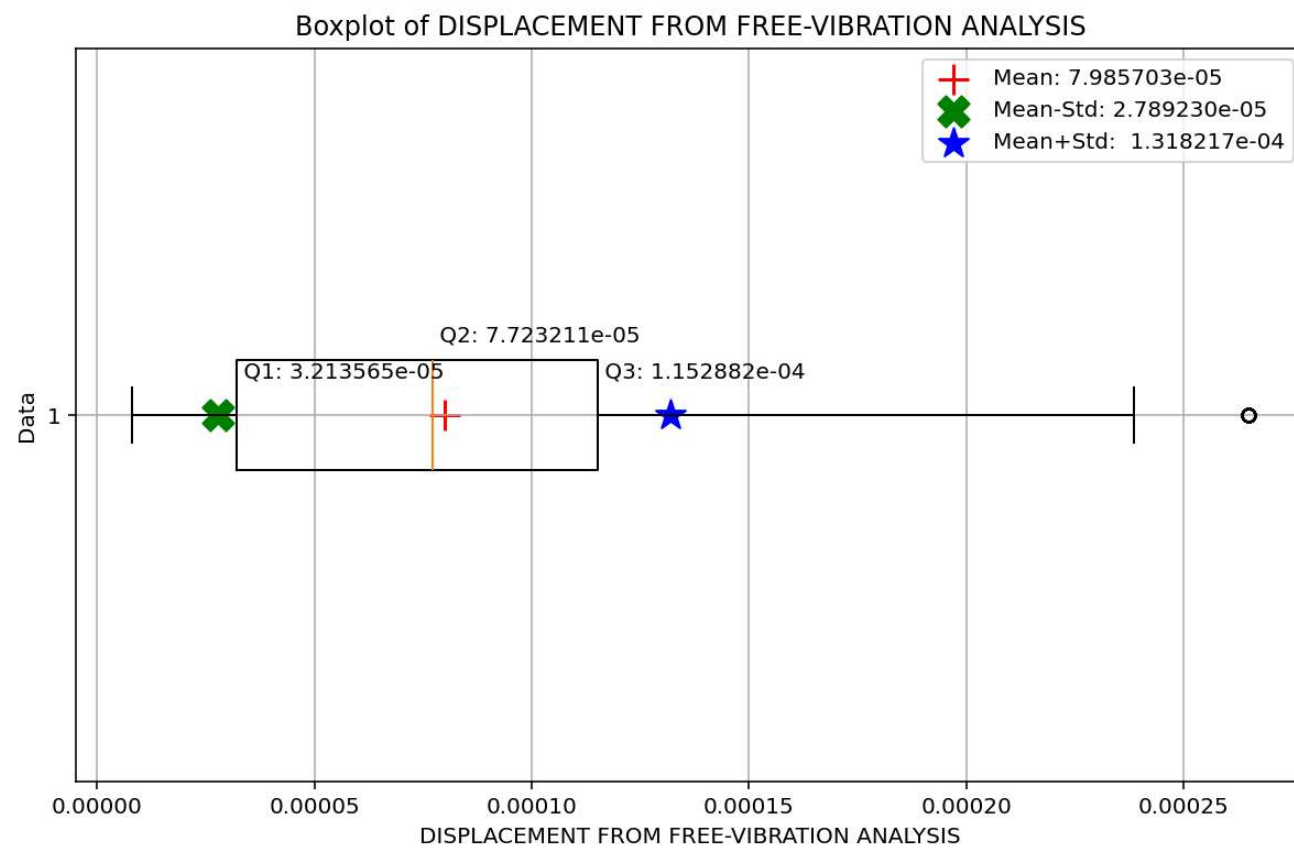


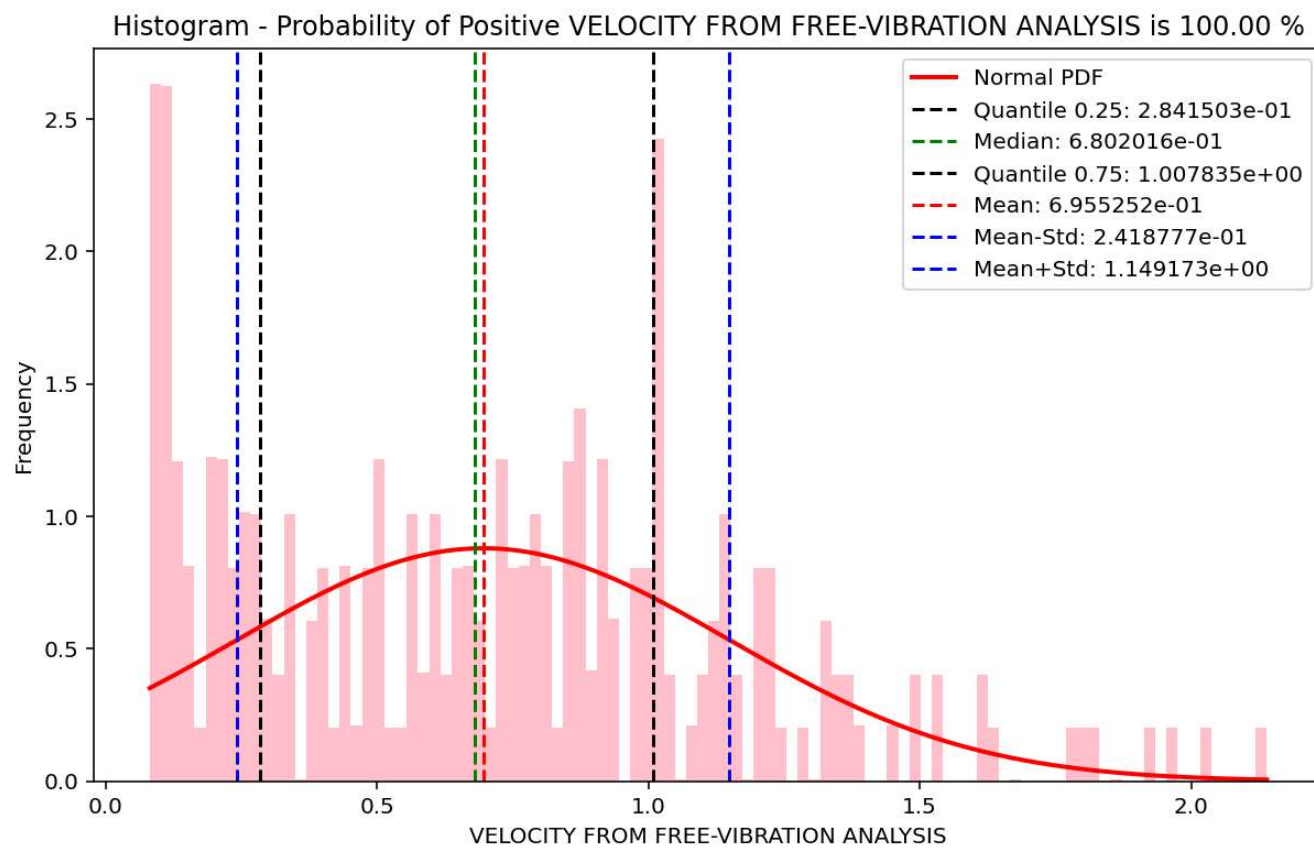



Boxplot of VELOCITY FROM FREE-VIBRATION ANALYSIS

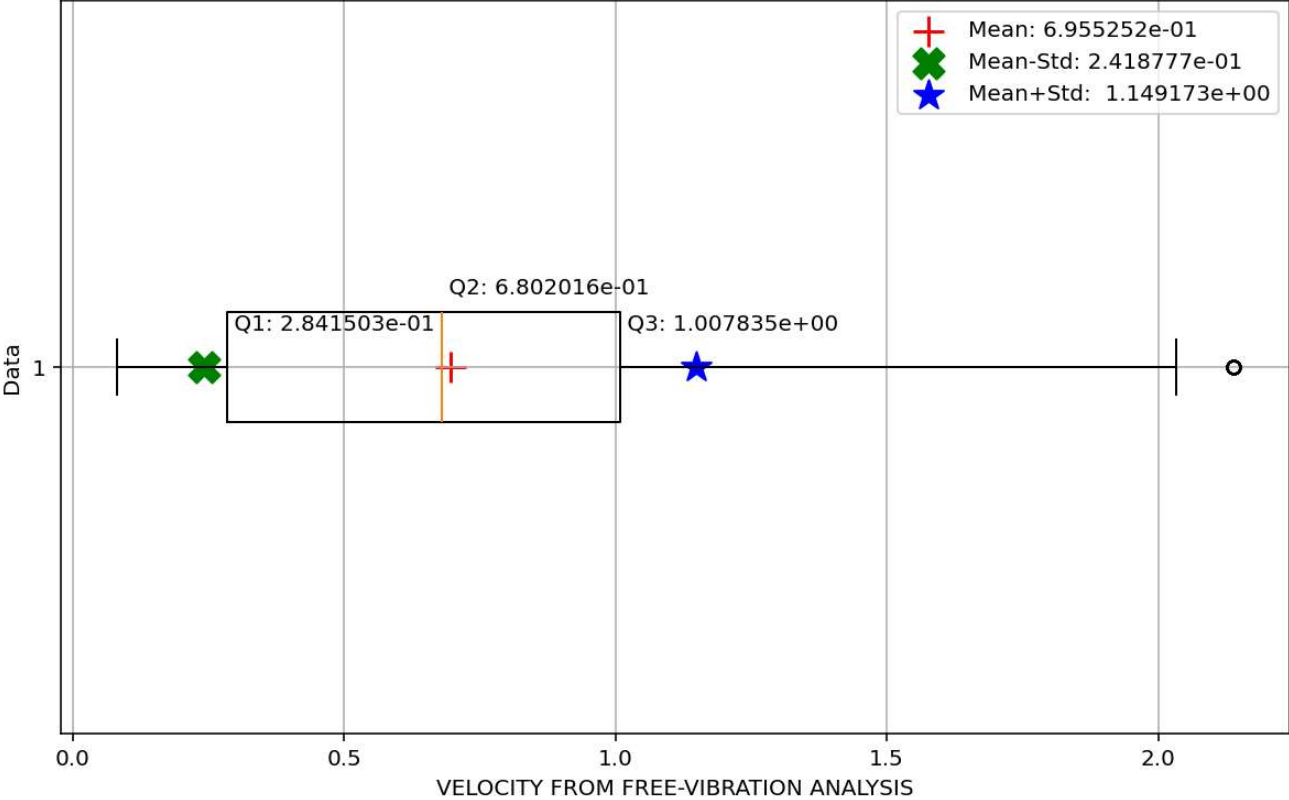

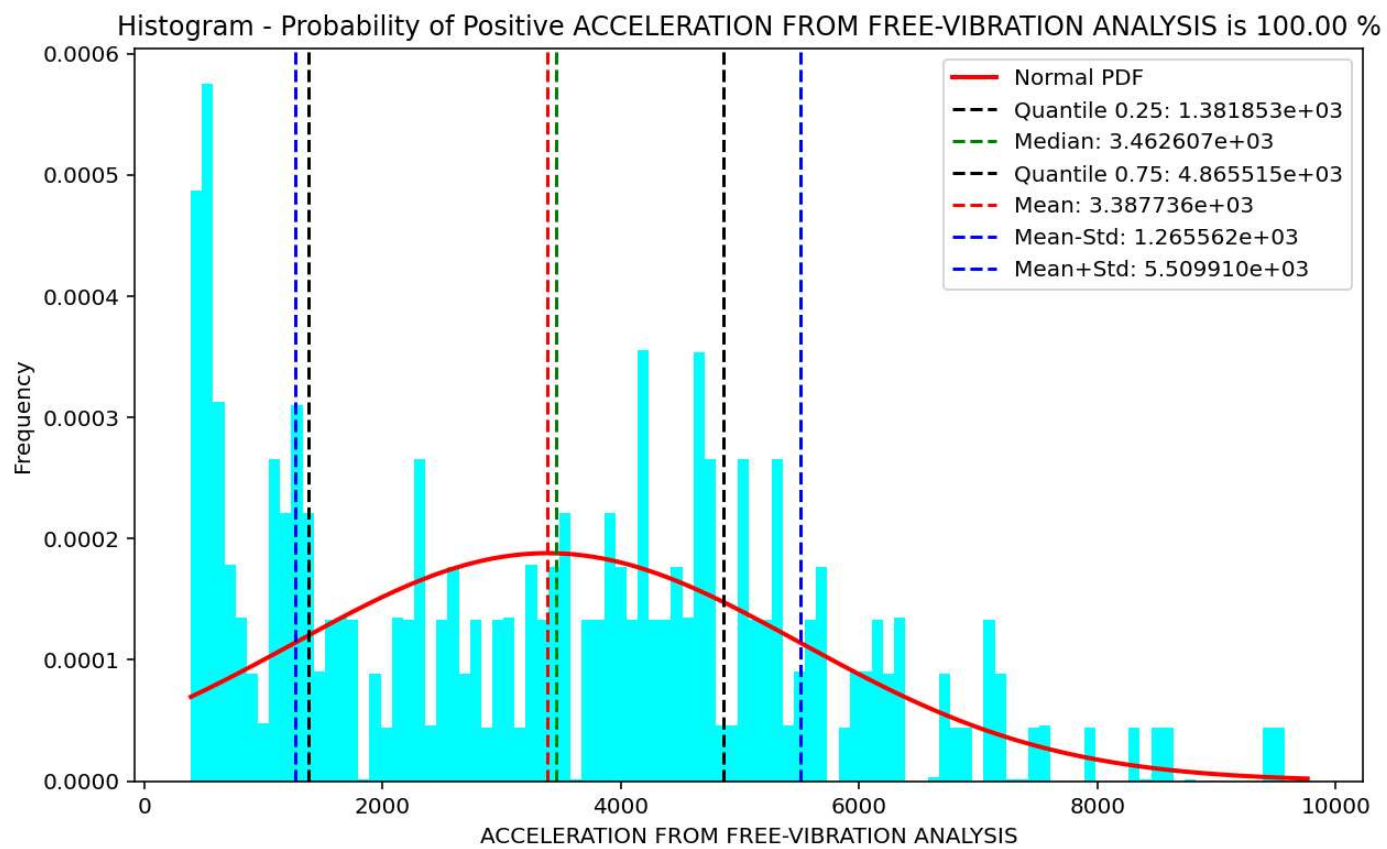


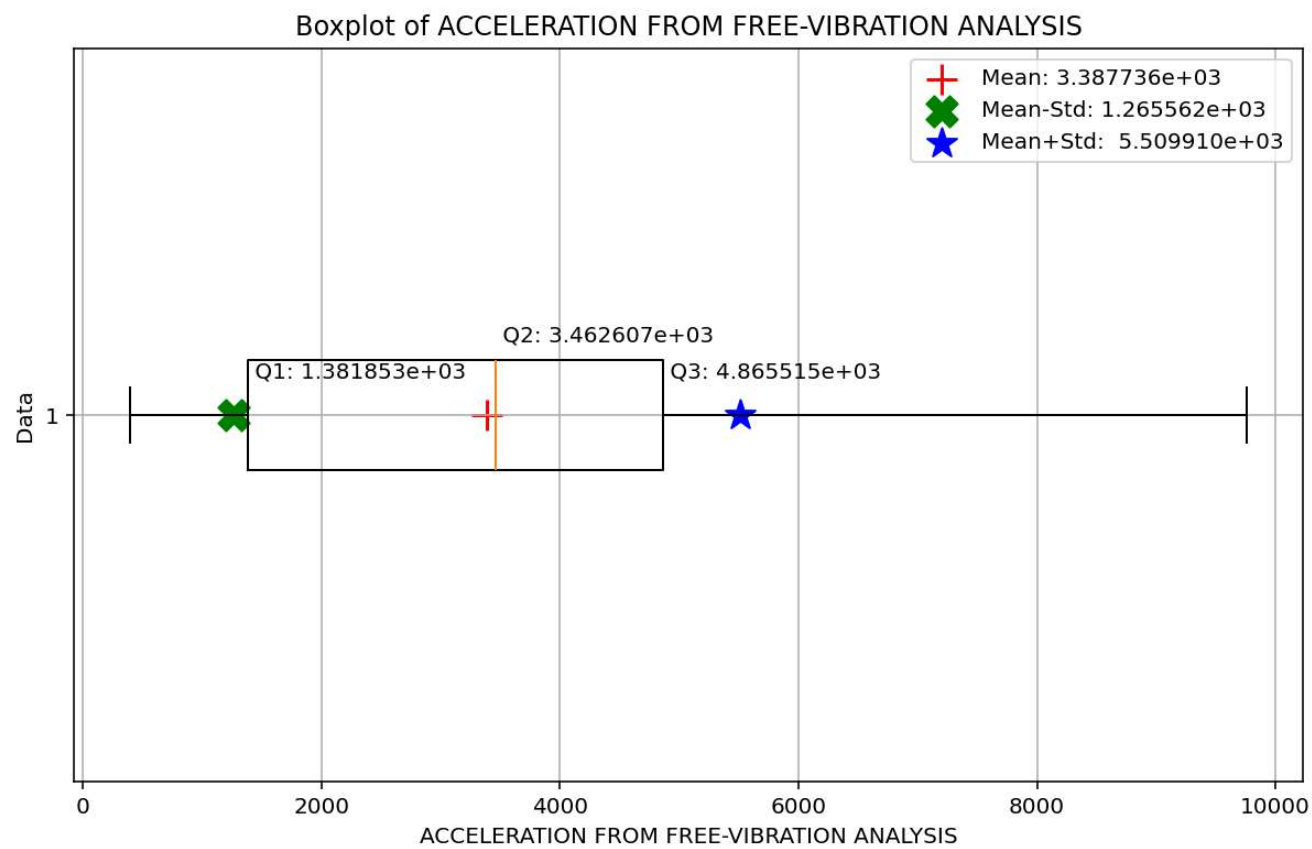


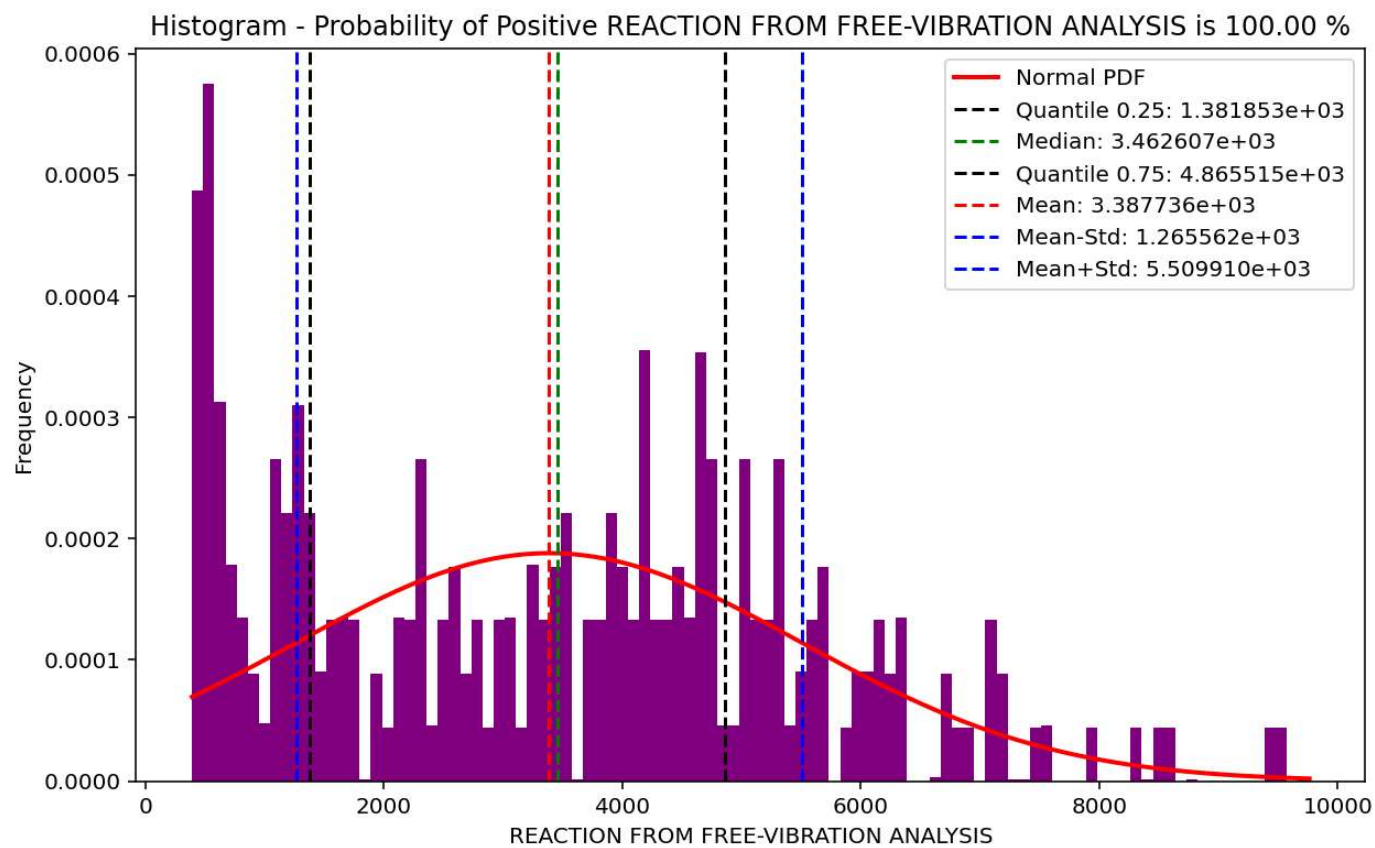

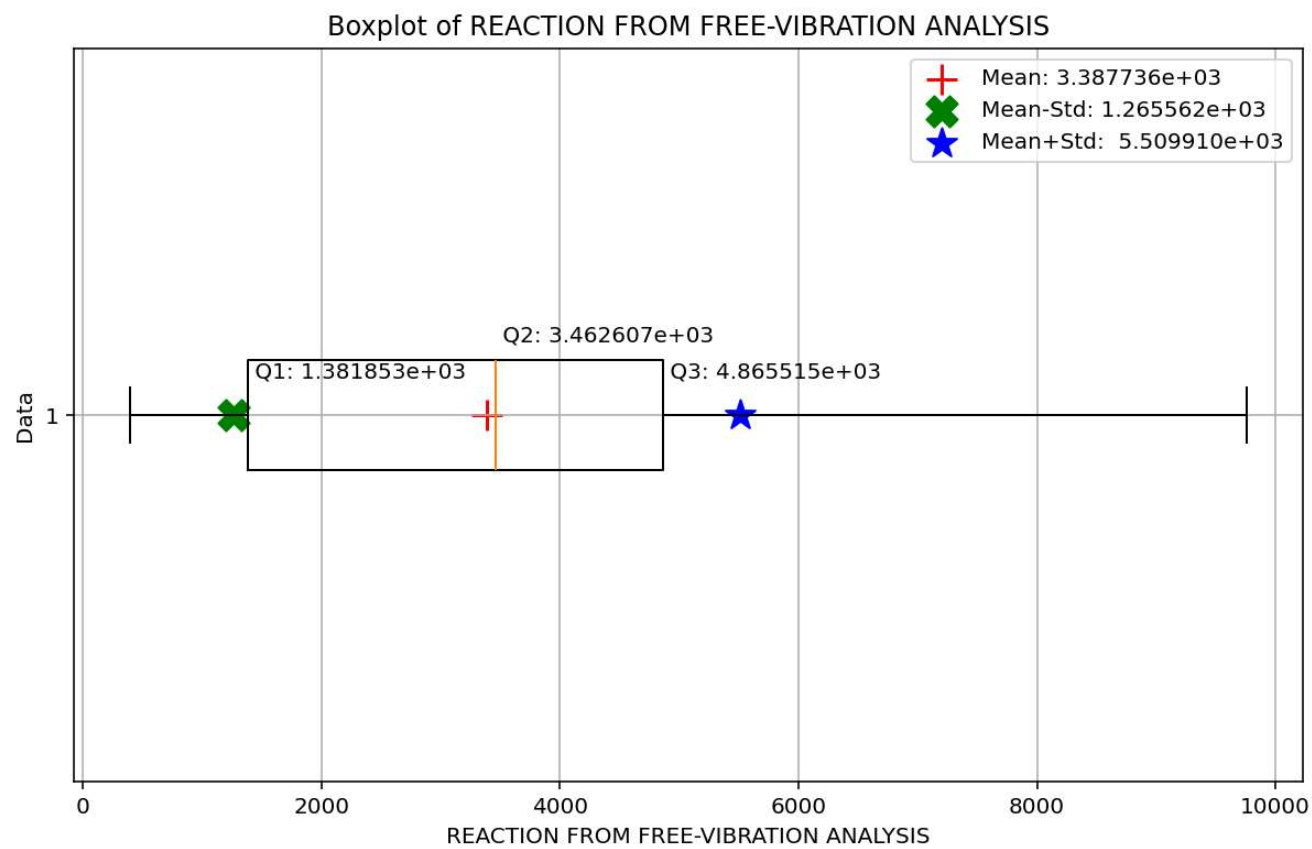



Histogram - Probability of Positive STRUCTURAL PERIOD [s] FROM FREE-VIBRATION ANALYSIS is 100.00 %

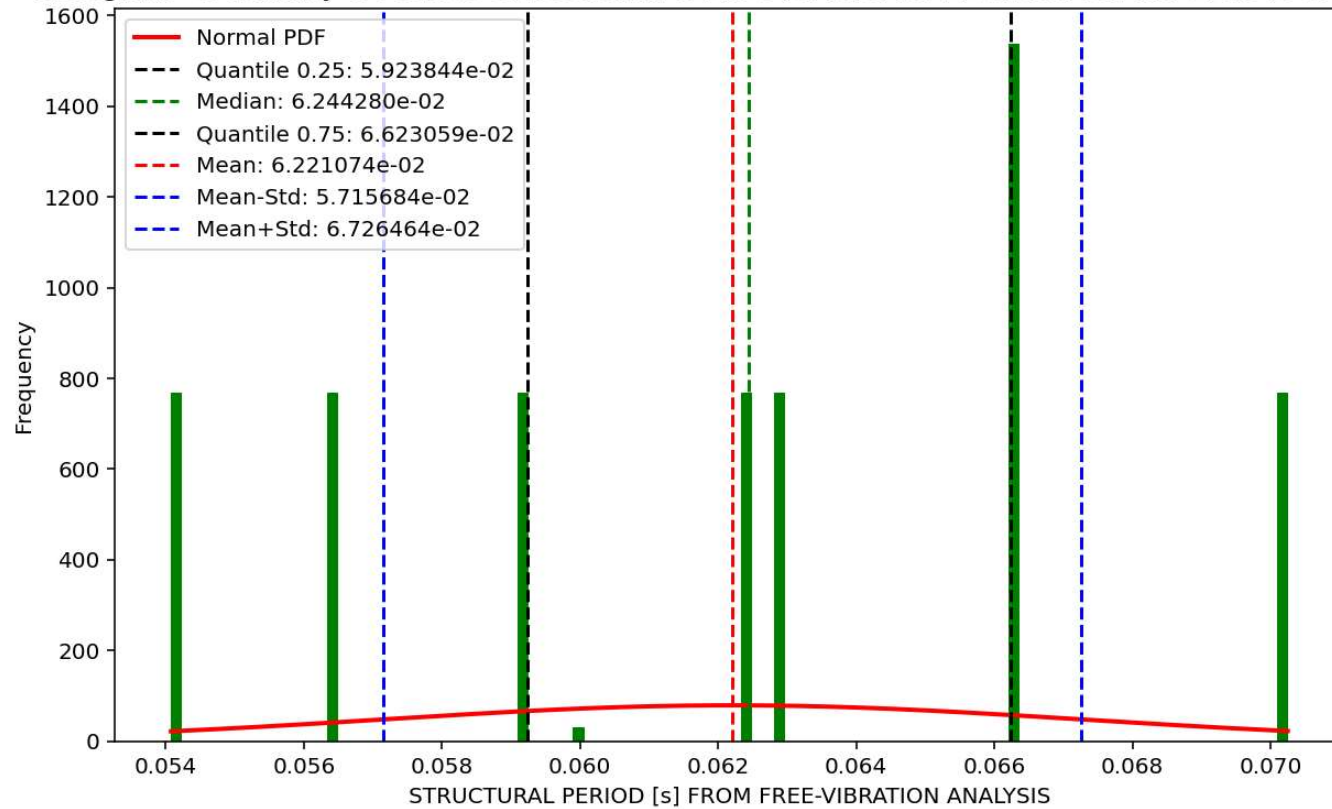

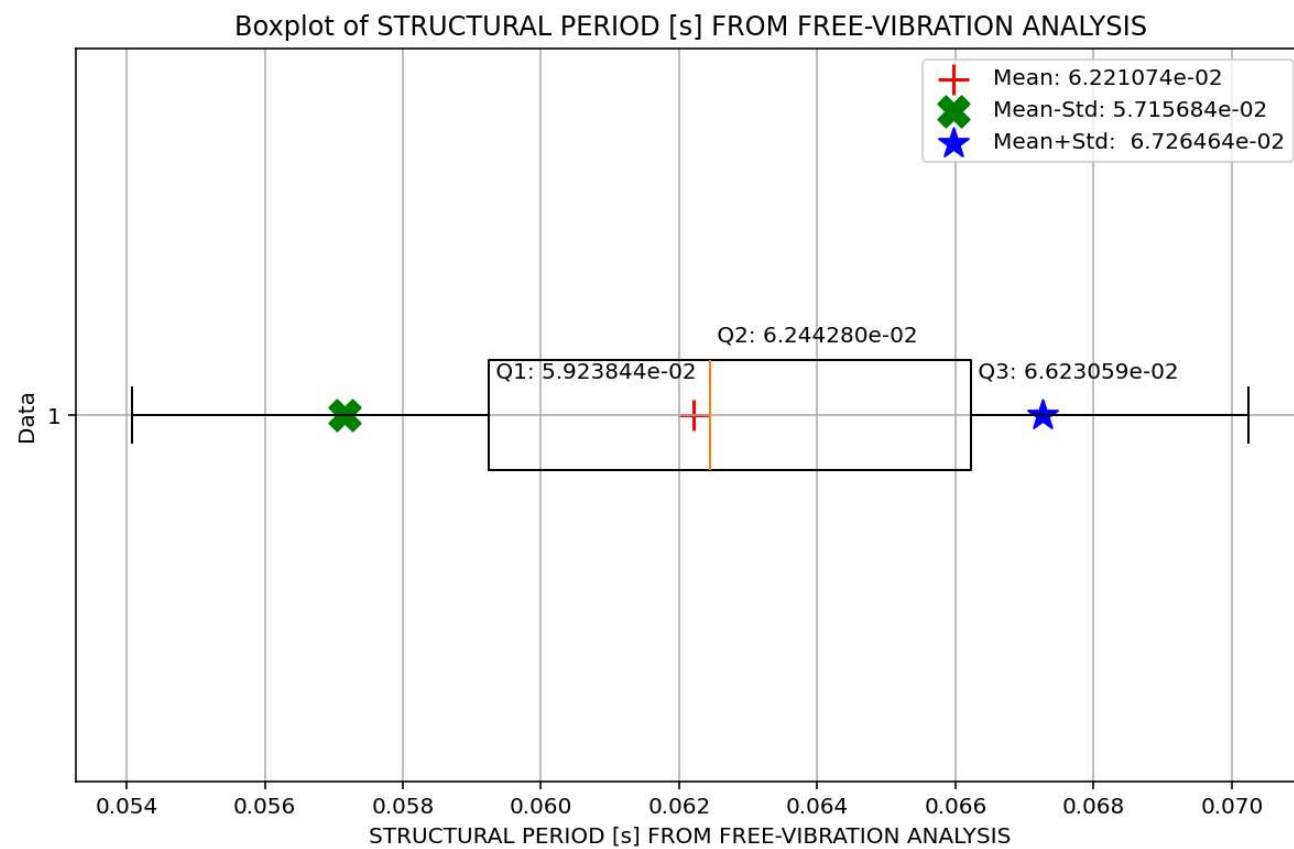

Histogram - Probability of Positive DUCTILITY DAMAGE INDEX FROM FREE-VIBRATION ANALYSIS is 0.00 %

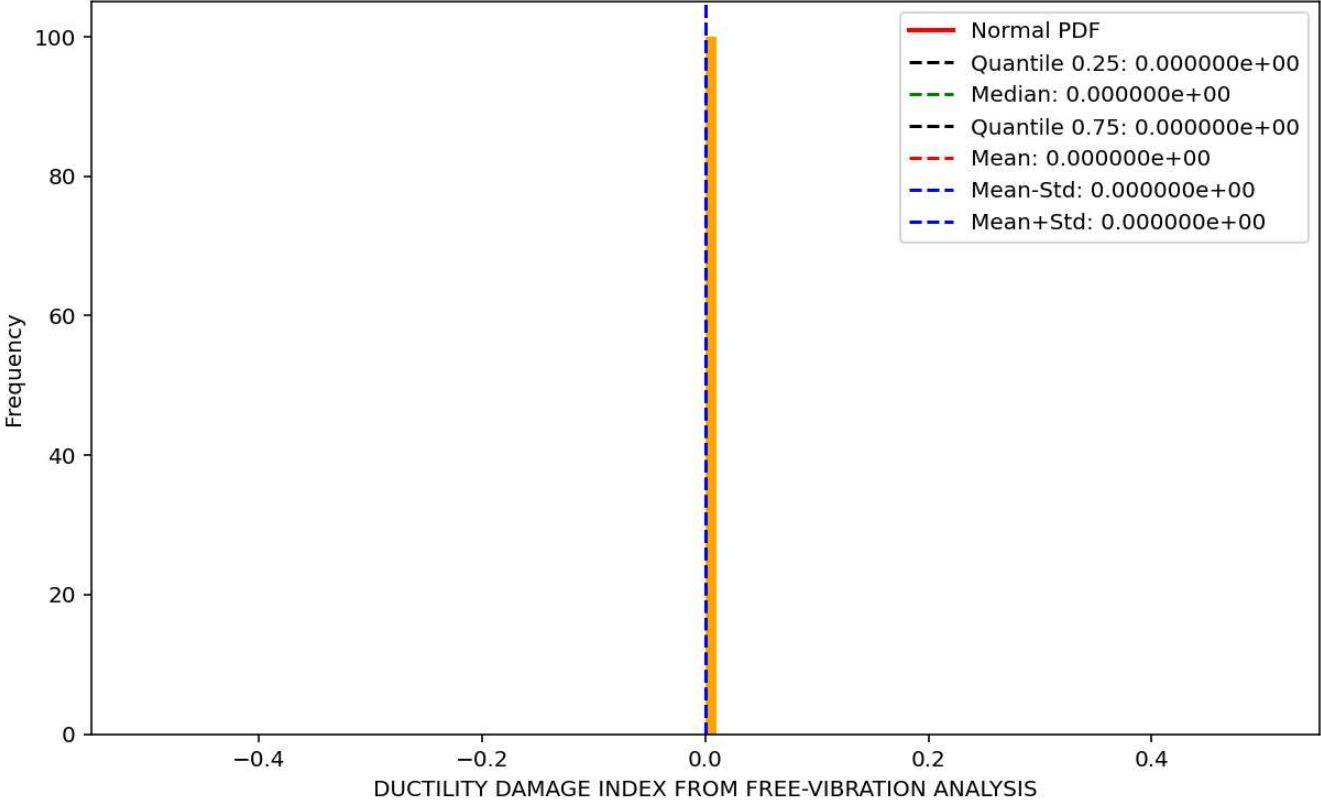

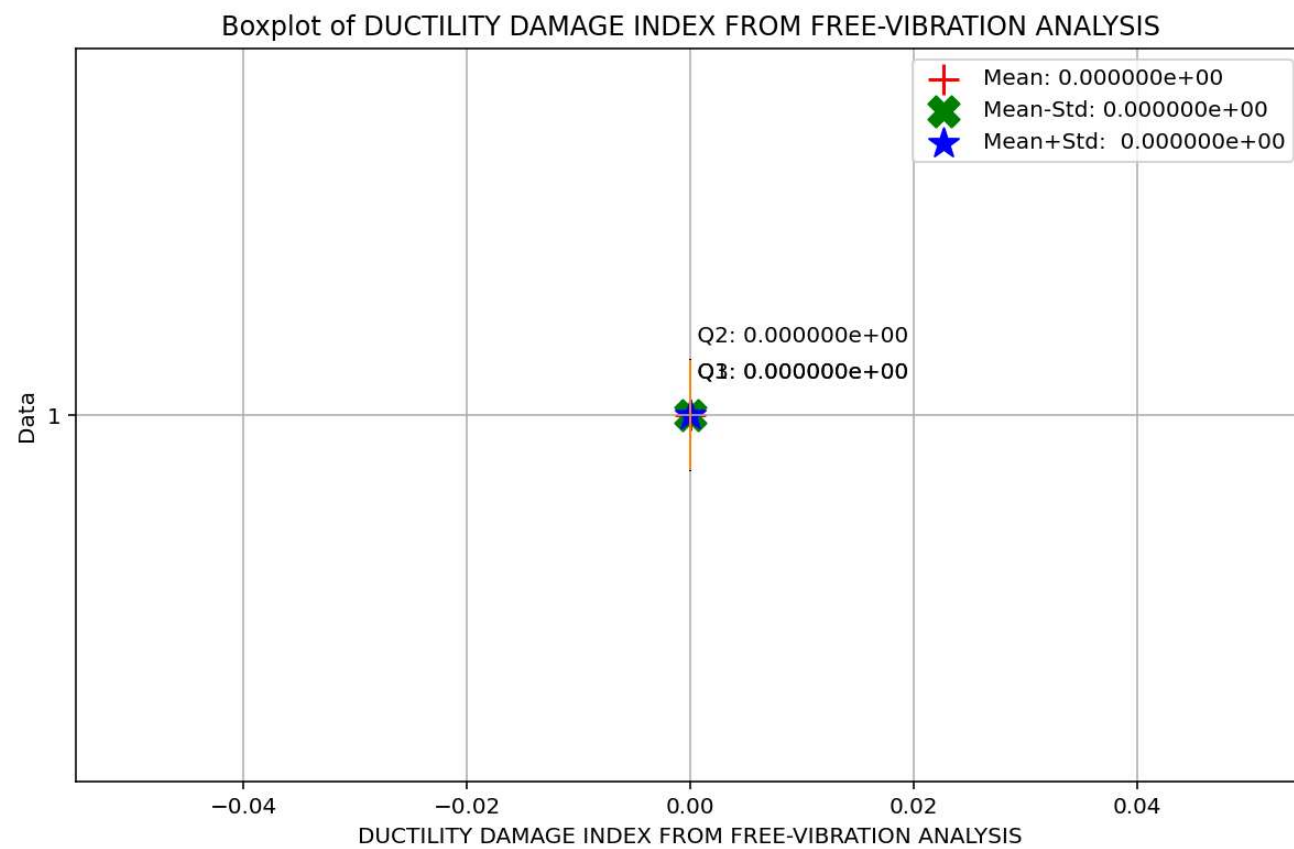

Histogram - Probability of Positive EQUIVALENT VISCOUS DAMPING RATIO [%] FROM FREE-VIBRATION ANALYSIS is 100.00 %

