


>> IN THE NAME OF ALLAH, THE MOST GRACIOUS, THE MOST MERCIFUL <<

DETERMINATION OF OPTIMUM STRUCTURAL YIELD STRENGTH FROM ENERGY DISSIPATION CAPACITY INDEX USING FINITE-DIFFERENCE NEWTON ITERATION AND OPENSEES

THIS PROGRAM WRITTEN BY SALAR DELAVAR GHASHGHAEI (QASHQAI)

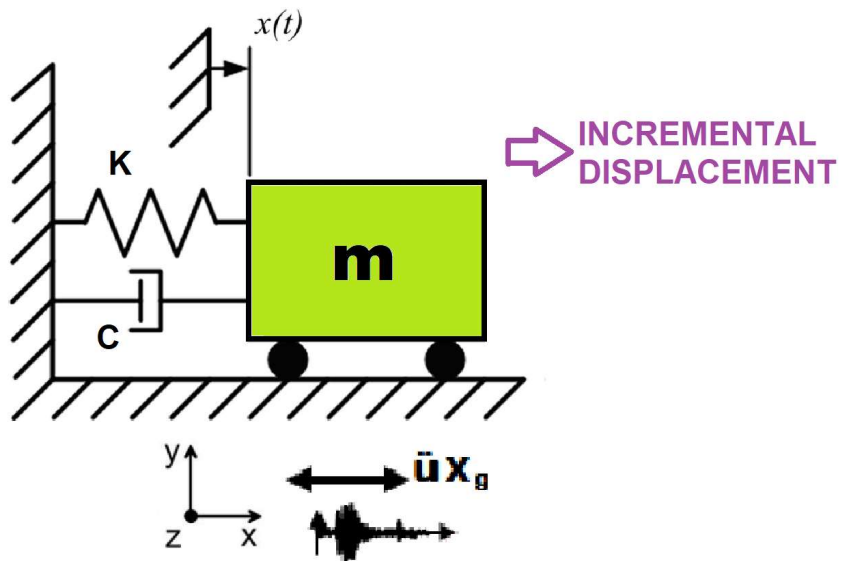

$$\text{Structural Ductility Damage Index} = \frac{\Delta_d - \Delta_y}{\Delta_u - \Delta_y}$$


Δ_d = Lateral Displaement from Dynamic Analysis

Δ_y = Lateral Yield Displaement from Pushover Analysis


Δ_u = Lateral Ultimate Displaement from Pushover Analysis

$$P(t) = P_0 e^{-0.05\bar{\omega}t} \sin(\bar{\omega}t)$$


$$m\ddot{u} + c\dot{u} + ku = P(t)$$

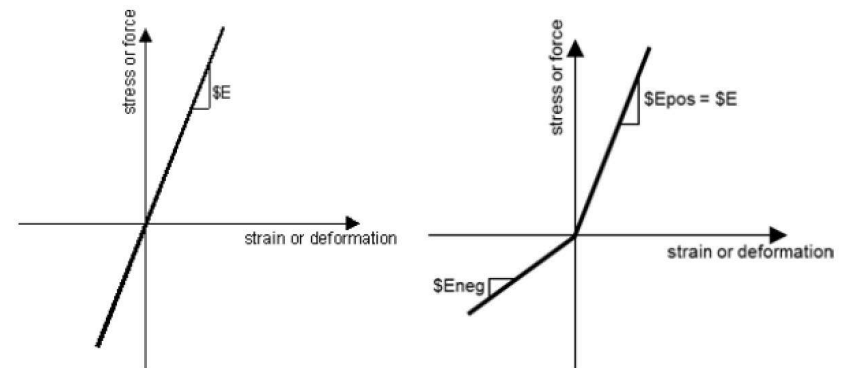

ELASTIC MATERIAL

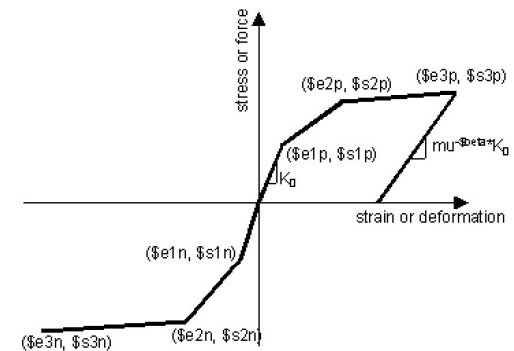

INELASTIC MATERIAL

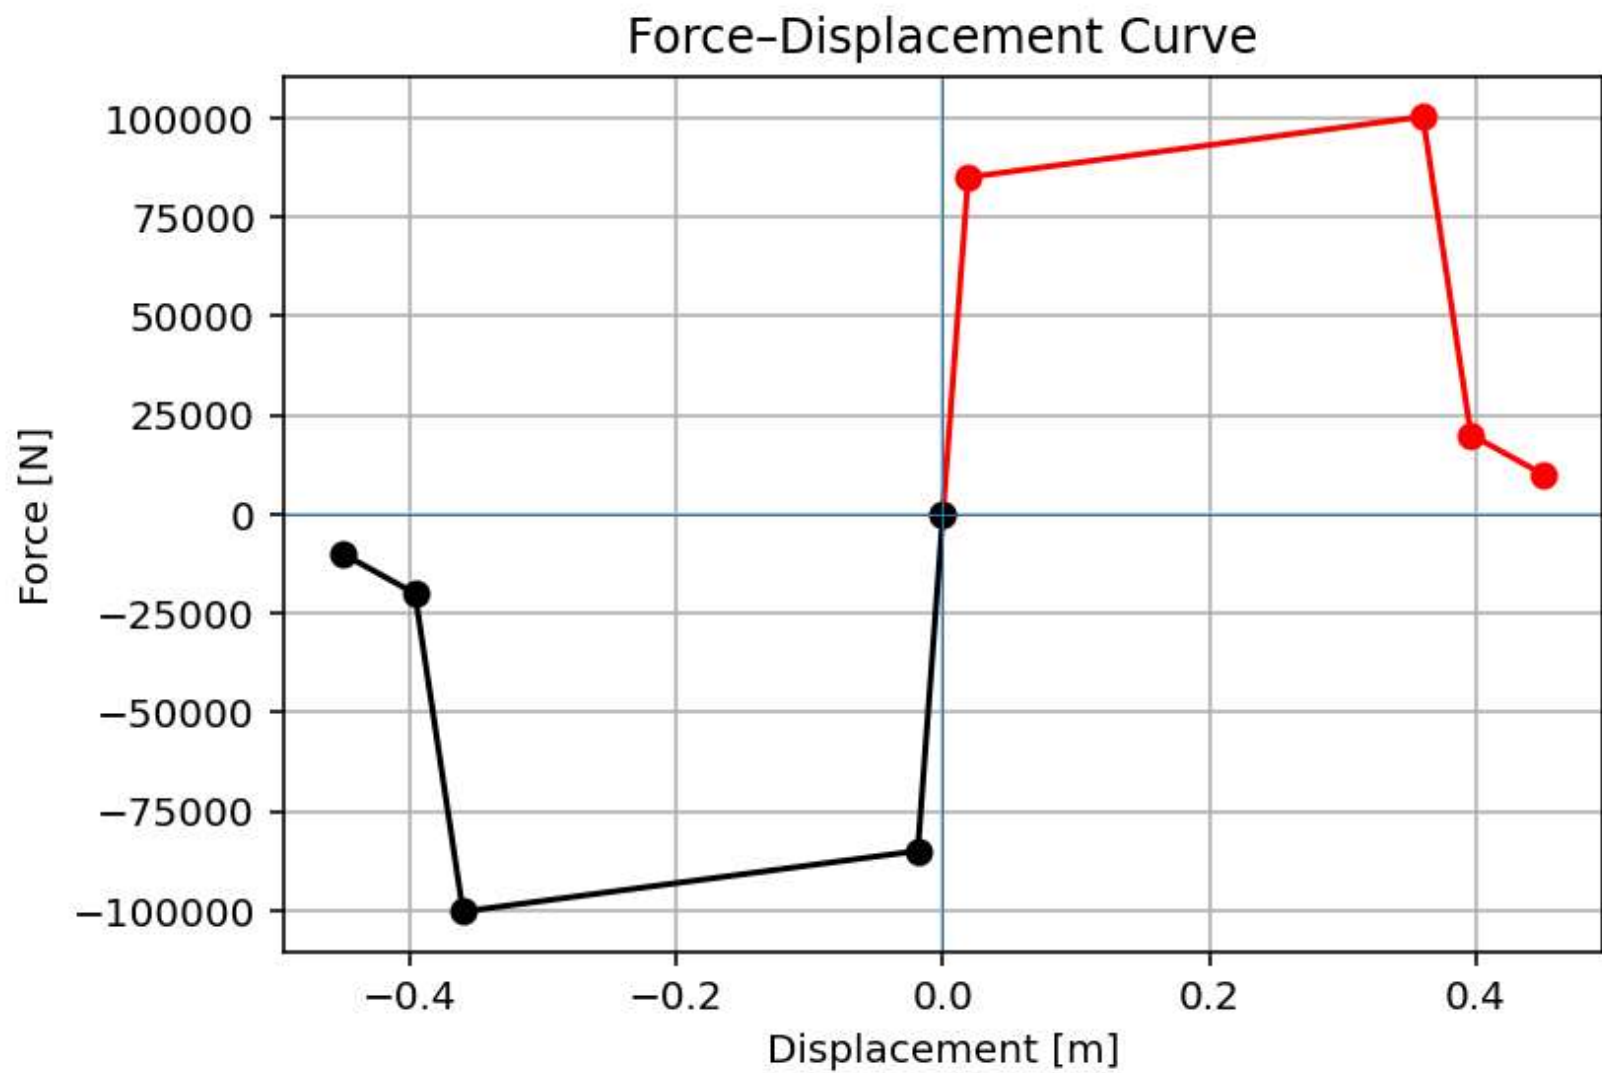


C:\Users\Dell\Desktop\OPENSEES_FILES\+EIGHT_ANALY...TIMIZATION_DECI_SDOF\FY_OPTIMIZATION_DECI_SDOF.py

FY_OPTIMIZATION_DECI_SDOF.py x PARA_FY_OPTIMIZATION_DECI_SDOF.py x

```
1 #####
2 # >> IN THE NAME OF ALLAH, THE MOST GRACIOUS, THE MOST MERCIFUL <<
3 # DETERMINATION OF OPTIMUM STRUCTURAL YIELD STRENGTH FROM ENERGY DISSIPATION CAPACITY AND
4 # FINITE-DIFFERENCE NEWTON ITERATION AND OPENSEES
5 #
6 # COMPREHENSIVE NONLINEAR SEISMIC ASSESSMENT OF A SINGLE-DEGREE-FREEDOM STRUCTURE : AN OPENSE
7 # FOR STATIC PUSHOVER, CYCLIC DEGRADATION, STATIC TIME-HISTORY AND DYNAMIC TIME-HISTORY AN
8 #
9 # ENERGY DISSIPATION CAPACITY INDEX = 100 * E_d(earthquake) / E_d(cyclic displacemen
10 #
11 # P(t) = P0 sin(wt)
12 # P(t) = P0 exp(-0.05wt) sin(wt)
13 #
14 # ASSESSMENT OF DUCTILITY DAMAGE INDICES FOR STRUCTURAL ELEMENTS AND SYSTEMS AND EVAL
15 # OF ENERGY DISSIPATION CAPACITY INDEX
16 #
17 # THIS PYTHON SCRIPT IS WRITTEN BY SALAR DELAVAR GHASHGHAEEI (QASHQAI)
18 # EMAIL: salar.d.ghashghaei@gmail.com
19 #####
20 """
21 Nonlinear Seismic Performance Assessment of a SDOF:
22 An OpenSeesPy Framework for Material and Geometric Nonlinearity Under Static, Cyclic, and Ear
23
24 This OpenSeesPy script performs rigorous nonlinear static and dynamic analysis of a SDOF
25 for performance-based earthquake engineering. The 2D model incorporates both material nonlin
26 (elastic-perfectly plastic or hysteretic steel with strain hardening)
27 and geometric nonlinearity (corotational truss formulation) to capture P-delta effects
28 and large displacements-essential for collapse assessment.
29
30 Eight analysis protocols are implemented:
31 (1) [PERIOD] : Structural Period
32 (2) [STATIC] : Gravity load analysis establishing dead load state
33 (3) [PUSHOVER] : Displacement-controlled pushover generating full capacity curves
```

...Y DISSIPATION_CAPACITY_INDEX_SDOF\FY_OPTIMIZATION_DECI_SDOF

43 %

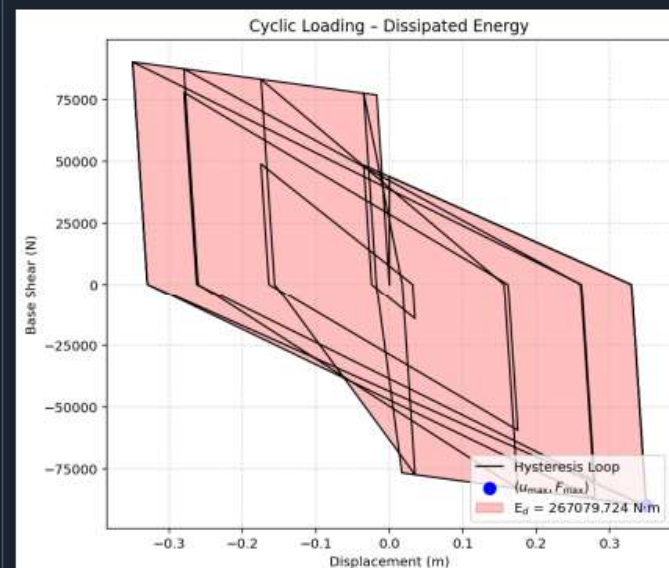

IPython Console Plots variable Explorer Help Debugger History Files

OPTIMIZATION PROBLEM FOR ENERGY DISSIPATION CAPACITY INDEX (EDCI)

Spyder (Python 3.12)

File Edit Search Source Run Debug Consoles Projects Tools View Help

C:\Users\ DELL\Desktop\OPENSEES_FILES\+EIGHT_ANALY...TIMIZATION_DECI_SDOF\FY_OPTIMIZATION_DECI_SDOF.py

FY_OPTIMIZATION_DECI_SDOF.py x PARA_FY_OPTIMIZATION_DECI_SDOF.py x

```
1 #####
2 # >> IN THE NAME OF ALLAH, THE MOST GRACIOUS, THE MOST MERCIFUL <<
3 # DETERMINATION OF OPTIMUM STRUCTURAL YIELD STRENGTH FROM ENERGY DISSIPATION CAPACITY IND
4 # FINITE-DIFFERENCE NEWTON ITERATION AND OPENSEES
5 #
6 # COMPREHENSIVE NONLINEAR SEISMIC ASSESSMENT OF A SINGLE-DEGREE-FREEDOM STRUCTURE : AN OPENSE
7 # FOR STATIC PUSHOVER, CYCLIC DEGRADATION, STATIC TIME-HISTORY AND DYNAMIC TIME-HISTORY AN
8 #
9 # ENERGY DISSIPATION CAPACITY INDEX = 100 * E_d(earthquake) / E_d(cyclic displacemen
10 #
11 # P(t) = P0 sin(wt)
12 # P(t) = P0 exp(-0.05wt) sin(wt)
13 #
14 # ASSESSMENT OF DUCTILITY DAMAGE INDICES FOR STRUCTURAL ELEMENTS AND SYSTEMS AND EVAL
15 # OF ENERGY DISSIPATION CAPACITY INDEX
16 #
17 # THIS PYTHON SCRIPT IS WRITTEN BY SALAR DELAVAR GHASHGHAEI (QASHQAI)
18 # EMAIL: salar.d.ghashghaei@gmail.com
19 #####
20 """
21 Nonlinear Seismic Performance Assessment of a SDOF:
22 An OpenSeesPy Framework for Material and Geometric Nonlinearity Under Static, Cyclic, and Ear
23
24 This OpenSeesPy script performs rigorous nonlinear static and dynamic analysis of a SDOF
25 for performance-based earthquake engineering. The 2D model incorporates both material nonlin
26 (elastic-perfectly plastic or hysteretic steel with strain hardening)
27 and geometric nonlinearity (corotational truss formulation) to capture P-delta effects
28 and large displacements-essential for collapse assessment.
29
30 Eight analysis protocols are implemented:
31 (1) [PERIOD] : Structural Period
32 (2) [STATIC] : Gravity load analysis establishing dead Load state
33 (3) [PUSHOVER] : Displacement-controlled pushover generating full capacity curves
34
```

Console 1/A x

```
+-----+
| lambda | omega | period | frequency |
+-----+
| 9.000e+02 | 30.0000 | 0.2094 | 4.7746 |
+-----+

Time: 20.0000, Displacement: 0.0089 mm, Reaction: -20.00 N

SEISMIC ANALYSIS DONE.

Xmax: 76738.55604208734
Dissipated Energy from Earthquake= 53415.94 N·m
Dissipated Energy from Cyclic Displacement= 267079.72 N·m

DISSIPATED ENERGY CAPACITY INDEX: 20.000 [%]

ZONE 2: MINOR DAMAGE

Fmax: -3.480730441651758e-07
DF: -0.0003480502925867768
DX: 6.734890144326308e-08
IT: 5 - RESIDUAL: 6.734890144326308e-08 X: 76738.55504208733

Optimum X (YIELD STRENGTH): 76738.5550
Iteration Counts: 5
Convergence Residual: 6.7348901443e-08

Total time (s): 57.3125
```

IPython Console Plots Variable Explorer Help Debugger History Files

Inline Conda: anaconda3 (Python 3.12.7) ✓ LSP: Python Line 693, Col 59 UTF-8 CRLF RW Mem 45%

Dissipated Energy from Earthquake= 53415.94 N·m

Dissipated Energy from Cyclic Displacement= 267079.72 N·m

DISSIPATED ENERGY CAPACITY INDEX: 20.000 [%]

ZONE 2: MINOR DAMAGE

Fmax: -3.480730441651758e-07

DF: -0.0003480502925867768

DX: 6.734890144326308e-08

IT: 5 - RESIDUAL: 6.734890144326308e-08 X: 76738.55504208733


Optimum X (YIELD STRENGTH): 76738.5550

Iteration Counts: 5

Convergence Residual: 6.7348901443e-08

Total time (s): 57.3125

Earthquake Response - Dissipated Energy

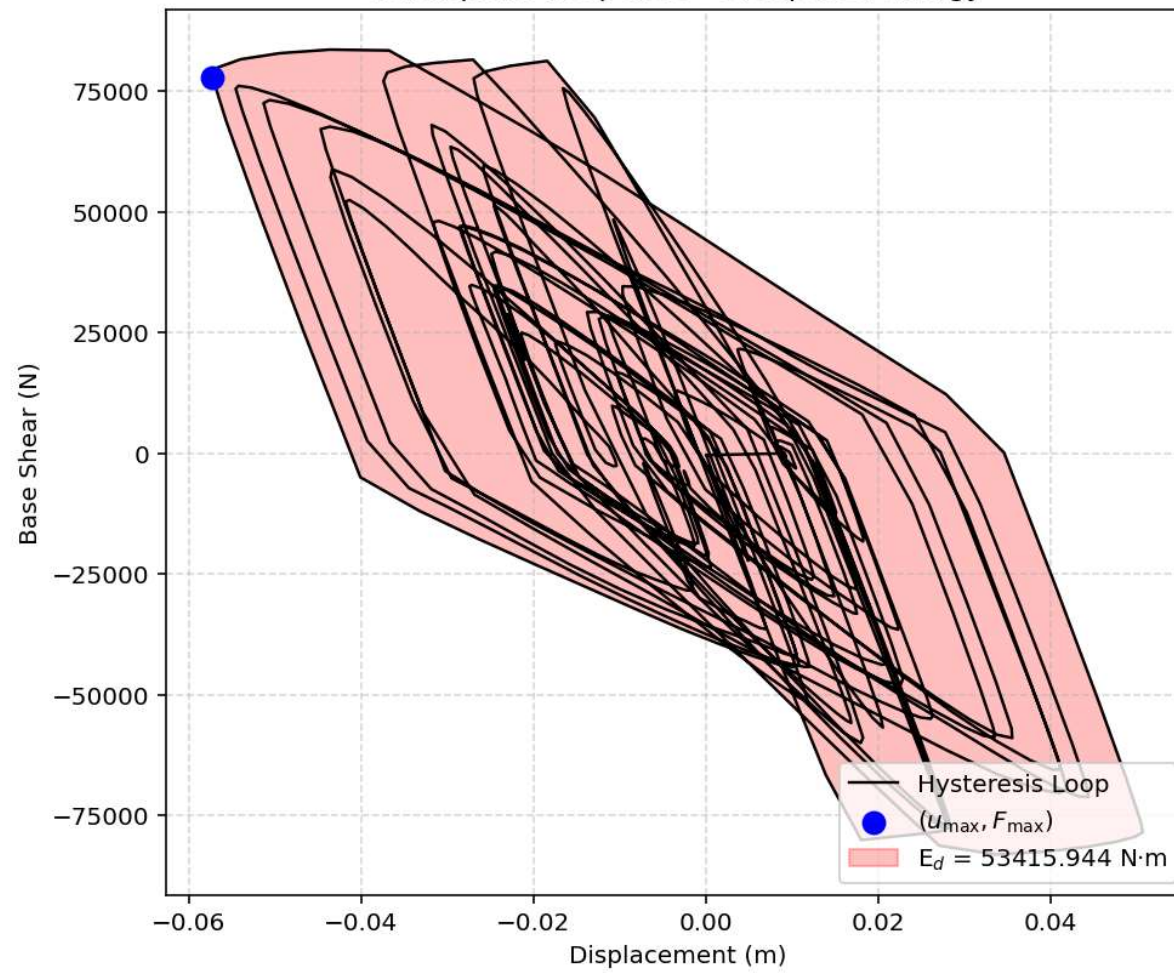

Cyclic Loading - Dissipated Energy

