

Fenster • windows  
 Rollläden • shutters  
 Türen + Tore • doors  
 Fassaden • curtain walling  
 Baubeschlüsse • building hardware

## TEST CERTIFICATE NO. 14/11-A001TR-Z3

Version 1.en

PfB-Internal-No. 15/03-A094

Initial type testing (ITT) of performance characteristics in accordance with EN 14351-1 :2006 + A1 : 2010 "Windows and doors - Product standard, performance characteristics - Part 1: Windows and external pedestrian doorsets without resistance to fire and/or smoke leakage characteristics – German version EN 14351-1:2006 + A1:2010"

**Applicant** Deceuninck NV  
 Bruggesteinweg 360  
 BE-8830 Hoogdele-Gits-Belgium

**Product type** Inward opening tilt and turn single casement window with fixed glazing bottom part, PVC, triple glazing


**Product name** Zendow 3.3

**Hardware** SI

**Sealing** TPE

**Dimension** Total outside dimensions (W x H) max. 1495 mm x 2300 mm

**Classification** According to test report No. 14/11-A001TR-B3 from February 11, 2015:

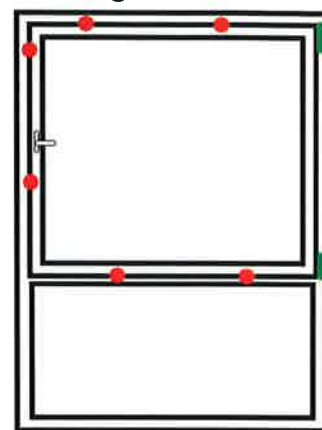

|          |                         |          |             |
|----------|-------------------------|----------|-------------|
| EN 1026  | Air Permeability        | EN 12207 | Class 4     |
| EN 1027  | Water Tightness         | EN 12208 | Class E900  |
| EN 12211 | Resistance to Wind Load | EN 12210 | Class C3/B4 |

**Validity** Period of validity of EN 14351-1 : 2006 + A1 : 2010



Dipl. Ing. (FH) Rüdiger Müller  
 Head of Institute



Stephanskirchen  
 March 03, 2015