

Evidence of Performance

Thermal transmittance

Test Report

No. 14-002994-PR03

(PB-K20-06-en-02)



Client	Deceuninck N.V. Bruggesteinweg 164 8830 Hooglede - Gits Belgium
Product	Plastic frame profile, profile combination: Casement – Frame
Designation	Zendow 3.3
Performance-relevant product details	Material PVC-U rigid; Face width B in mm 119; Frame member Profile cross section, width in mm 69; depth in mm 84; Reinforcement; Material Steel - metallic surface; Casement member Profile cross section, width in mm 84; depth in mm 94; Reinforcement; Material Steel - metallic surface; Replacement panel; Edge cover in mm 15; Thickness in mm 44
Special features	--

Result

Thermal transmittance



$$U_f = 0,98 \text{ W/(m}^2\text{K)}$$

Basis *)

EN 14351-1:2006+A1:2010-03


EN 12412-2:2003-07

Test report 14-002994-PR01
(PB-K20-06-en-01) dated
16.12.2014

Test report 14-002994-PR03
(PB-K20-06-en-01) dated
18.2.2015

*) Correspond/s to the national standard/s
(e.g. DIN EN)

Representation

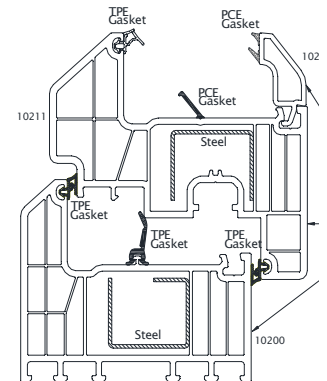

Instructions for use

The results obtained can be used by the manufacturer as Declaration of Performance in accordance with the Construction Products Regulation 305/2011/EU. The provisions of the applicable product standard have to be observed.

Validity

The data and results given refer solely to the described and tested specimen.

Notes on publication

The ift-Guidance Sheet "Conditions and Guidance for the Use of ift Test Documents" applies. The cover sheet can be used as abstract.

Contents

The report contains a total of 6 page/s and annex (1 page).

ift Rosenheim

23.03.2015

Manuel Demel, M.BP. Dipl.-Ing. (FH)
Deputy Head of Testing Department
Building Physics

Konrad Huber, Dipl.-Ing. (FH)
Operating Testing Officer
Building Physics