


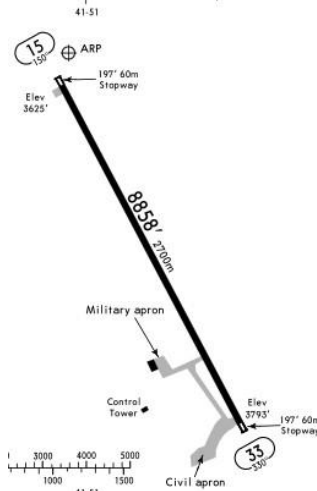



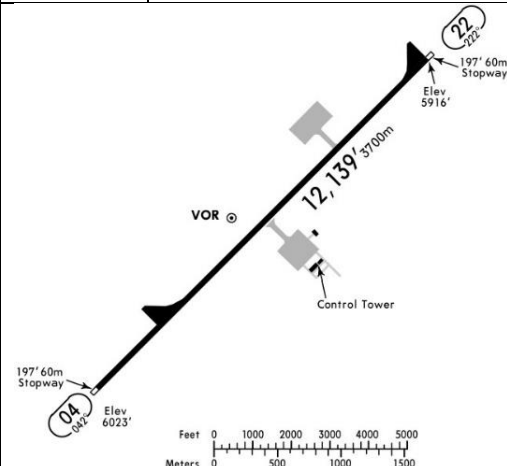
Airport Information

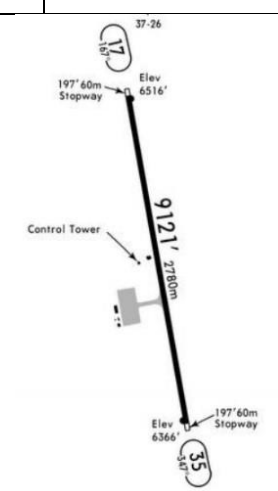
September 09/2024

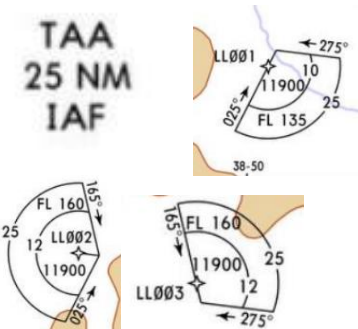
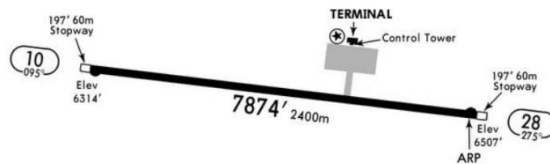
JIGJIGA – JIJ - HAJJ	2
DIRE DAWA – DIR - HADR	3
BAHIRDAR – BJR - HABD	4
GONDER – GDQ - HAGN	5
LALIBELA – LLI - HALL	6
SHIRE – SHC – HASR	7
MEKELE – MQX - HAMK	8
AXUM – AXU - HAAX	9
AWASSA – AWA - HALA	10
JIMMA – JIM - HAJM	11
ARBA MINCH – AMH - HAAM	12
SEMERA – SZE - HASM	13
DESSIE – DSE - HADC	14
ASOSA – ASO - HASO	15
NEKEMTE – NEK – HANK – GUDINA TUMSA AIRPORT	16
GAMBELLA – GMB - HAGM	17
DEMBI DOLO – DEM - HADD	18
GOBA/ROBE – GOB - HAGB	19
JINKA – BACO – BCO - HABC	20
GODE – GDE - HAGO	22
KEBRI DEHAR – ABK - HAKD	23
GAROWE – GGR - HCGR	24
BOSASO - BSA - HCMF	25
HARGEISA – HGA – HCMH	26
UGANDA - ENTEBBE – EBB – HUEN (UTC+3)	27
SOUTH SUDAN – WAU - WUU – HJWW (UTC+2)	28
CREATING NEW AIRPORT RUNWAY AND APPROACH	31


JIGJIGA – JIJ- HAJJ						
RWY 2,500 x 45m	03 - 027°	@6938' RT H210 fp 6938'		MDA	03	6310'
	21 - 207°	@6938' DT H207 fp 6938'			21	6310'
	118.5		MAP 10,000			
Grid Mora 12⁹	Elevation 5,935'	Accel 6,938'	Trans 10,000'			
ADD – JIJ O7R/L – MIWAS 2A/3A (25L/R - MAGON 2B/3B RNAV SID) – JJ111 RWY03 / JJ001 RWY 21			JIJ - ADD Rwy 21 – JJ116 (Rwy 03 JJ006) – AB505 – KALTY – 07/ AB111 R25			
FIX DWA			ETP PNR HADR			
Depressurization escape route ↓ FL140 lcpt R080ADS (Course 260) - ↓12,500' to 25NM ADS direct to AB111/KALTY						Fire 6


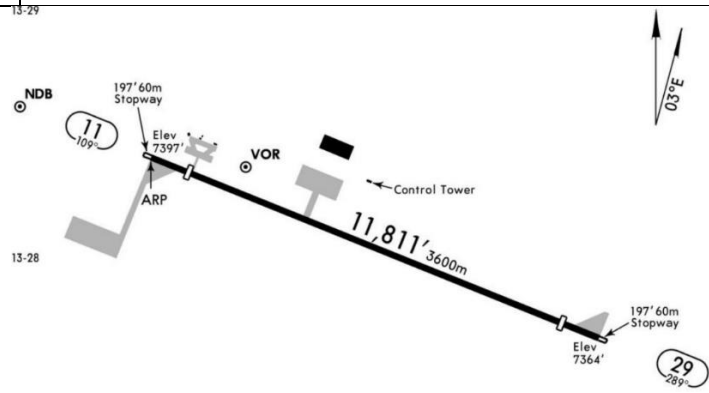
DIRE DAWA – DIR- HADR							
RWY 2,700 x 45m 2,520 x 45m (txyway)	15 - 150° Slope : +1.89	@RWY END RT H330 fp 4,614	MDA	15	4,520'		
	33 - 330° Slope : -1.89	@4,614 DT H330 fp 4,614					
MSA 	118.3 DWA: 117.7		MAP 8,500 2.5NM from threshold				
Grid Mora 14²	Elevation 3,792'	Accel 4,614'	Trans 13,500'				
ADD – DIR O7R/L – MIWAS 2A/3A (25L/R - MAGON 2B/3B RNAV SID) – DR001 RWY15			DIR - ADD Rwy 33 – MAGON airway UT667 – AB505 – KALTY R07/ AB111 R25				
FIX DWA			ETP PNR HAJJ				
Depressurization escape route ↓ FL140 lcpt R080ADS (Course 260) - ↓12,500' to 25NM ADS direct to AB111/KALTY					Fire 7		
• Ldg RWY 15 • Take off RWY33 Flap 10							

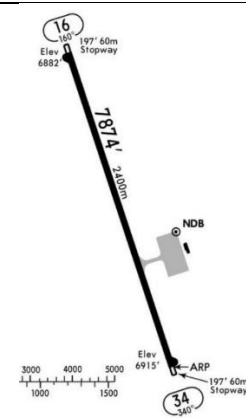
BAHIRDAR – BJR- HABD						
RWY 3,000 X 45M	04 - 042°	@7,039' LT H010 fp 7,039'		MDA	04	LNAV/VNAV: 6,500' LNAV: 6,600'
	22 - 222°	@7,039' RT H010 fp 7,039'			22	LNAV/VNAV: 6,390' LNAV: 6,530'
MSA  MSA BDR VOR	118.3 BDR: 114.4		MAP 04: 14,000' 22: 10,300'			
Grid Mora 14 ⁶	Elevation 6,023'	Accel 7,039'	Trans 14,000'			
ADD - BJR 07R/L – LABLA 3A/5A (25L/R - AMUDO 1B/2B (up to AB217)) - BD202 RWY22 / BD301/2 RWY04			BJR - ADD RWY 04 VIA UT446 → AWASH R07/ AB110 R25 (Expect early R turn after departure)			
FIX BDR			ETP PNR HAGN			
Depressurization escape route Within 115GWZ: ↓14,000' Turn E of the route, lcpt R350GWZ (course 170) → HAAB N of 115GWZ: ↓14,000 Turn E of the route lcpt R115BDR (Course 295) → HABD / HAGN						Fire 6


GONDER – GDQ- HAGN					
RWY 2,780 X 45M	17 - 167⁰ Takeoff Slope: -1.96	@7,541 DT H167 fp 7,541	MDA	35 - 347⁰ Landing	7,460'
MSA 12⁵	118.6 BJR: 118.3 BDR: 114.4		MAP 12,500' 3.5NM from threshold		
Grid Mora 13⁴	Elevation 6,545'	Accel 7,541'	Trans 13,500'		
ADD - GDQ 07R/L – LABLA 3A/5A (25L/R - AMUDO 1B/2B (up to AB217)) - GN001 RWY35			GDQ - ADD RWY 17 – AZO 17A1 – AWASH R07/ AB110 R25		
FIX BDR			ETP PNR HABD		
Depressurization escape route With in 115GWZ: ↓14,000' Turn E of the route, lcpt R350GWZ (course 170) → HAAB N of 115GWZ: ↓14,000 Turn E of the route lcpt R115BDR (Course 295) → HABD / HAGN Communicate with BJR first					Fire 5

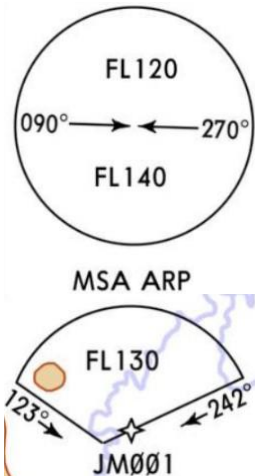
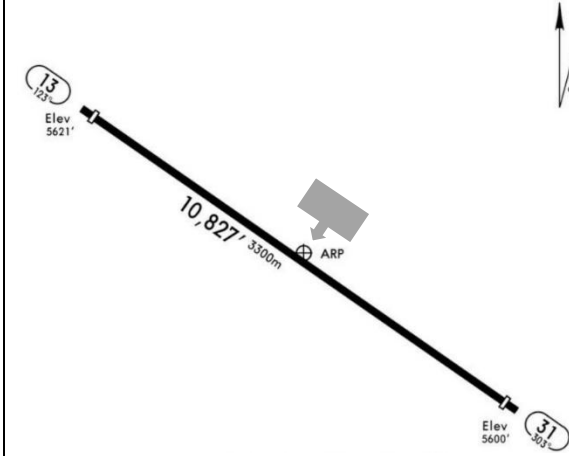
LALIBELA – LLI- HALL						
RWY 2,400 X 45M	10 - 095 ⁰	@RWY END RT H290 fp 7,440'		MDA	10	7,550' min MAP climb gradient 2.9% 7,580' min MAP climb gradient 2.5%
	28 - 275 ⁰	@7,440' RT H285 fp 7,440'				
MSA 	118.5 BJR: 118.3 GDQ: 118.6		MAP 11,900' 3.5NM from threshold			
Grid Mora 16 ⁵	Elevation 6,431'	Accel 7,440'	Trans 11,900'			
ADD - LLI 07 –RANSO 2A (25L/R - AMUDO 1B/2B (up to AB217)) -LL001 RWY 10 GDQ - LLI GDQ RWY 17 – (AZO18 A1 RNAV SID or DCT APDAN) – LL002 RWY10			LLI - ADD RWY 28 – LL006 – AWASH R07 / AB110 – RWY25 LLI – GDQ RWY 28 – LL006 – GN002 -GN001 RWY35			
FIX RANSO			ETP PNR HABD, HAGN			
Depressurization escape route Within 115GWZ: ↓14,000' Turn W, lcpt R350GWZ (course 170) → HAAB N of 115GWZ: ↓14,000 → HALL						Fire 6
• For ADD – GDQ – LLI - GDQ – ADD flight, Request LLI wxr from IOCC in ADD or from GDQ						


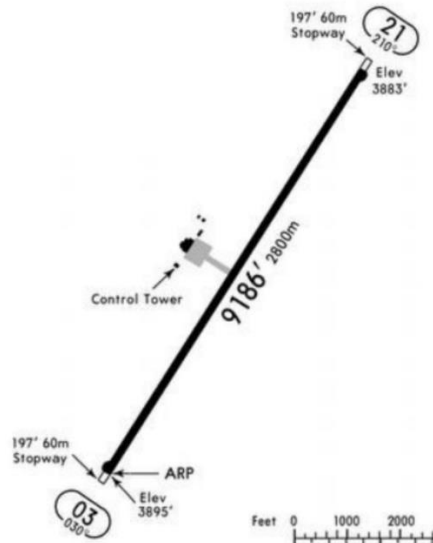
SHIRE – SHC – HASR N14 04.6 E038 16.4						
RWY 2,470 X 45M	15 - 143° N14 05.10 E038 16.03 6,197'	@7,209 RT H330° fp 7,400'		MDA	15	7,700'
	33 - 323° N14 04.04 E038 16.76 6,185'	@7,209 DT H323° fp 7,209'			33	7,700'
MSA 14°	118.2 MQX: 118.8 QHA: 116.6 IMK: 111.7 BJR: 118.3 BDR: 114.4			MAP 15: 7,700' 33: 7,700'	15  33	
Grid Mora 12° , 17°	Elevation 6,209'	Accel 15: 7,400' 33: 7,209'		Trans 14,000'		
ADD - SHC 07R/L – EKBOB1A/2A (Expect After dep LT @12,000)/ (25L/R - AMUDO 1B/2B (up to AB217)) – AVUNI – Visual App RWY15/33				SHC - ADD RWY15/33 - AVUNI – (AWASH RWY07R) / (AB110 – AB113 RWY25L) *T/O FLAP 10		
FIX QHA				ETP PNR HAMK, HABD		
Depressurization escape route With in 115GWZ: ↓14,000' Turn W, lcpt R350GWZ (Course 170)→ HAAB N of 115GWZ & S of 12° N (Abeam LLI): ↓14,000 Turn W of the route Remain outside of 70DME BDR until lcpt R115BDR (Course 295) → HABD N of 12° North (Abeam LLI): ↓14,000 lcpt W887 → AVUNI → HAMK/HAAH/HASR ETBUN→ EPVAN→ AVUNI→ QHA/HASR (ETBUN→List– airways – T336 – AVUNI → QHA/HASR)						
• Communicate with MQX first						Fire 6


MEKELE – MQX- HAMK						
RWY 3,600 X 45M	11 - 109°	@8,403 DT H109° fp 8,403'	MDA	11	LNAV/VNAV: 8,100' LNAV: 8,250'	
	29 - 289°	@8,403 LT H110° fp 8,403'		29	9,050'	
MSA  MSA ARP	118.8 QHA: 116.6 IMK: 111.7 SHC: 118.2 BJR: 118.3 BDR: 114.4		MAP 11: 11,600' 29: 14,000'			
Grid Mora 13 ⁹	Elevation 7,401'	Accel 8,403'	Trans 13,000'			
ADD - MQX 07R/L – EKBOB1A/2A (Expect After dep LT @12,000)/ (25L/R - AMUDO 1B/2B (up to AB217)) AVUNI (Dry season)/ via DSC (in Rainy season) – MK110 RWY 11 / MK002 RWY29 (Expect After dep LT @12,000)			MQX - ADD RWY11 – XUDAM 1C/ R29 XUDAM 1A - (AWASH RWY07R) / (AB110 – AB113 RWY25L)			
FIX QHA			ETP PNR HABD, HASR			
Depressurization escape route With in 115GWZ: ↓14,000' Turn W, lcpt R350 (Course 170) GWZ → HAAB N of 115GWZ & S of 12° N (Abeam LLI): ↓14,000 Turn W of the route Remain outside of 70DME BDR until lcpt R115 (Course 295) BDR → HABD N of 12° North (Abeam LLI): ↓14,000 lcpt W887 → AVUNI → HAMK/HAAX/HASR ETBUN→ EPVAN→ AVUNI→ QHA (ETBUN→List– airways – T336 – AVUNI → QHA)						
Fire 6						


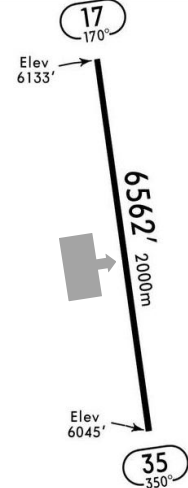
AXUM – AXU- HAAX					
RWY 2,400 X 45M	16 - 160°	@7,915’ DT H158 fp 7,915’	MDA	16	-
	34 - 340°	@7,915’ DT H338 fp 7,915’		34	8,000’ CDFA
MSA TAA 25NM IAF	118.7 QHA: 116.6 IMK: 111.7 SHC: 118.2 BJR: 118.3 BDR: 114.4		MAP 34: 14,000’		
Grid Mora 12 ⁶	Elevation 6,960’	Accel 7,915’	Trans 14,000’		
ADD - AXU 07R/L – EKBOB1A/2A (Expect After dep LT @12,000)/ (25L/R - AMUDO 1B/2B (up to AB217)) – AVUNI - AX001 R34			AXU - ADD RWY 16/34 – AX004 (Or SID NIWAY B for RWY 16) - (AWASH RWY07R) / (AB110 – AB113 RWY25L)		
FIX -			ETP PNR HABD, HAMK, HASR		
Depressurization escape route With in 115GWZ: ↓14,000’ Turn W, Icpt R350 (Course 170) GWZ → HAAB N of 115GWZ & S of 12° N (Abeam LLI): ↓14,000 Turn W of the route Remain outside of 70DME BDR until Icpt R115 (Course 295) BDR → HABD N of 12° North (Abeam LLI): ↓14,000 Icpt W887 → AVUNI → HAMK/HAAX/HASR ETBUN→ EPVAN→ AVUNI→ QHA/HAAX (ETBUN → List– airways – T336 – EPVAN → AVUNI → QHA/HAAX)					
Fire 6					

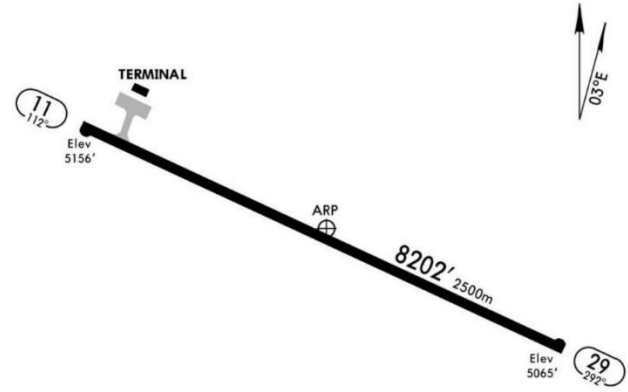
AWASSA – AWA- HALA						
RWY 3,000 X 45M	01 - 008 ⁰	Via Rwy hdg, fp 6,800', 20nm N th of AWA near Shala Lake, RT to airport, visually avoid terrain. @5,800' RT LA fp 6,633		MDA	01	6,080' MAP climb gradient 2.9% 6,890' MAP climb gradient 2.5%
	19 - 188 ⁰	Via Rwy hdg, 6NM SW of AWA LT to airport, fp 6,700'. Visually avoid terrain. @6,400' LT LA fp 6,700			19	7,200'
MSA 	118.7			MAP 01: 12,400' 19: 7,200'		
Grid Mora 14⁷	Elevation 5,702'	Accel 01: 6,800' 19: 7,100'	Trans 14,000'			
ADD - AWA 07R – SHALA 2A/ – LA202 RWY01/ Long final RWY19 (Expect RT after departure) 25L SHALA 1B / (25L/R- OKNET 1B/2B)- LA202 RWY01/ Long final RWY19				AWA - ADD RWY 01 – ARONA 07/ AB440 – AB112- R25		
FIX SHALA				ETP PNR HAAM, HAJM, HADR		
Depressurization escape route N of RUDOL: ↓FL130 → A.A along airway to OKNET → ↓FL125 → lcpt R193ADS (Course 013) / ARONA - OKNET - ADS R193/100NM – ADS						Fire 7

JIMMA – JIM- HAJM					
RWY 3,300 X 45M	13 - 123 ⁰	Climb via RWY hdg, @6,700 retract fp, set MCP continue climb, @7.5NM LT H040, established in valley West of airport, hold visually avoiding terrain		MDA	31 6,250' MAP climb gradient Min 2.9%
	31 - 303 ⁰	@RWY END LT H120, @6,700' retract fp, set MCP continue climb, @7.5NM LT H040			
MSA 	118.4			MAP FL120	
Grid Mora 14 ⁰	Elevation 5,621'	Accel 6,700'	Trans 10,000'		
ADD - JIM 07R – BRO3A/4A UP TO AB803 (25L/R BR04B/5B up to AB211) → JM001 RWY 31				JIM - ADD RWY 13 – JM007 (Insert it for engine out escape route indicator) - JM006 → ARONA	
FIX KOFTA				ETP PNR HALA, HADR	
Depressurization escape route NE of DAGAP: ↓FL135 → Along airway to UB535 → KOFTA → ARONA / AWASH / ADS (Thus: KOFTA – ARONA/AWASH – HAAB)					Fire 5
• Birds are threat					


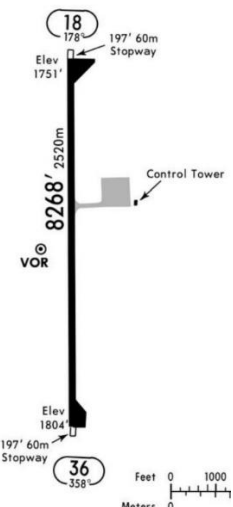
ARBA MINCH – AMH- HAAM						
RWY 2,800 X 45M	03 - 030°	Via H045 fp 4,895'		MDA	03	4,680' CDFA (Continuous Descent Final Approach)
	21 - 210°	@4,895' LT H190 fp 4,895'			21	5,400' (TP)
MSA 	118.6			MAP 03 – FL100 21 – 5,400' (TP)		
Grid Mora 14 ⁷ / 13 ⁷	Elevation 3,895'	Accel 4,895'	Trans 7,000'			
ADD - HAAM 07R – SHALA 2A/3A (Expect RT after departure) 25L SHALA 1B / (25L/R- OKNET 1B/2B) - AM211 – AM214 RWY 03 / Visual approach RWY 21				HAAM - ADD RWY 03 – (After dep expect RT H045 to avoid terrain) / RWY 21 – AM214 – AM211 – ARONA R07/ AB440- AB112 R25		
FIX				ETP PNR HALA, HAJM		
Depressurization escape route N of RUDOL: ↓FL130 → A.A along airway to OKNET → ↓FL125 → Icpt R193ADS (Course 013) / ARONA - OKNET - ADS R193/100NM – ADS						Fire 5
The Terminal Arrival Altitude (TAA) is the lowest altitude that will provide a minimum clearance of 300 m (1,000 ft) above all objects located in an arc of a circle defined by a 46 km (25 NM) radius centered on the initial approach fix (IAF), or where there is no IAF on the intermediate approach fix (IF), delimited by straight lines joining the extremity of the arc to the IF.						

SEMERA – SZE- HASM					
N11 47.2 E040 59.5					
RWY 2,500 X 45M	13 - 134° N11 47.49 E040 58.55	@2,365 LT H115 fp 2,365'		MDA	13 (R base H104) 2,900'
	31 - 314° N11 46.52 E04059.52	@2,365 DT H313 fp 2,365'			31 (L base H284) 2,900'
MSA 10³	118.6 121.9 (Fire Brigade) 125.9 (All stations) 118.9 DSE			MAP 2,900	13 (T/O)  31 (Ldg)
Grid Mora 10³	Elevation 1,365'	Accel 2,365'	Traffic Pattern 2,900'	Trans 9,600'	
ADD - SZE R07 GISHE 1A/ (R25 GISHE 1B) → LB RWY 31				SZE - ADD RWY 13 → AB405 - AWASH R07/ AB110 R25	
FIX ERDIR				ETP PNR HADR, HAJJ	
Depressurization escape route ↓14,000 Remain E of R025GWZ(Course 205) / On R080ADS (Course 260) ↓12,500 → HAAB					Fire 6
* FAF 5NM (3000') H134					


DESSIE – DSE- HADC						
RWY 2000 X 30M	17 - 170°	H165 @7,133’ LT H150 fp7,600’		MDA	17	-
	35 - 350°	-			35	8,150’ (min MAP gradient 2.8%) 8,250’ (min MAP gradient 2.5%)
	118.9			MAP 11,500’		
Grid Mora 17°	Elevation 6,134’	Accel 7,600’	Traffic Pattern -	Trans 14,000’		
ADD - DSE 07 - GISHE 1A (25L/R - AMUDO 1B/2B (up to AB217))→ HAMUS → DC001 RWY35				DSE - ADD RWY 17 → DC001 → AB405 → AWASH RWY 07 RWY 17 → DC001 → AB110 – AB113 RWY25		
FIX HAMUS				ETP PNR HABD		
Depressurization escape route ↓14,000 Remain E of R025GWZ(Course 205) / On R080ADS (Course 260) ↓12,500 → HAAB						Fire 6
* It’s a special airport * MAP is 6.4 NM from RWY * T/O RWY 17, LDG RWY 35						

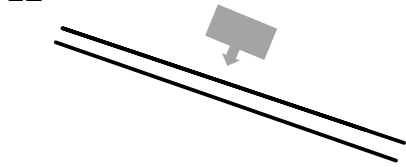
ASOSA – ASO- HASO						
RWY 2,500 X 45M	11 - 112°	@6,120' DT H112 fp 6,120'		MDA	11	5,750'
	29 - 292°	@6,120' DT H292 fp 6,120			29	5,420'
MSA 10°	118.5			MAP 11: FL120' 29: 10,000'		
Grid Mora 9 ⁴ / 11 ³	Elevation 5,117'	Accel 6,120'	Trans 10,000'			
ADD - ASO 07R/L – USUBA1A/3A up to AB803 (25L/R - USUBA1B/2B up to AB211) → SO222RWY 29/SO117RWY11				ASO - ADD RWY11 → ETOKO → AWASH RWY07R / (AB540 – AB550 – AB110 RWY 25L) OR (AB440 – AB112 RWY 25L)		
FIX -				ETP PNR HAGM		
Depressurization escape route						
E of MLK: ↓FL135 → AWASH/ADS → HAAB						
Fire 6						

NEKEMTE – NEK – HANK – GUDINA TUMSA AIRPORT					
N09 20.625 E036 32.4133					
RWY 2,500 X 45M Taxi way width: 23m	06 - 060° N09 20.34767 E036 31.82733 Elev: 4,554'	@5,567' LT H270 fp 5,567'	MDA	06	6,100'
	24 - 240° N09 20.932 E036 33.057 Elev: 4,536'	@RWY END RT H290 fp 5,567'		24	6,100'
MSA -			MAP 6,100'		
Grid Mora 13 ⁴	Elevation 4,544'	Accel 5,567'	Trans		
ADD – NEK 07R/L – USUBA1A/3A up to AB803 (25L/R - USUBA1B/2B up to AB211) → ETOKO → EGNAK → NEK			NEK - ADD NEK → EGNAK → ETOKO → AWASH RWY07R / AB540 – AB550 – AB110 RWY25L		
FIX -			ETP PNR HASO, HAGM		
Depressurization escape route					
E of MLK: ↓FL135 → AWASH/ADS → HAAB					
- Try not to approach via Rwy24, there are bunch of high trees on the threshold - Wild animals on the runway (red fox /rabbit) - Fire man frequency 121.9					Fire 5

GAMBELLA – GMB- HAGM						
RWY 2,520 X 45M	18 - 178 ⁰	@2,804' RT H270 fp 2,804'		MDA	18	2,180' CDFA LNAV
	36 - 358 ⁰	@2,804' LT H270 fp 2,804'			36	2,160' CDFA LNAV
MSA 18 - TAA 25NM IAF 36 -  MSA ARP	118.7			MAP 18: 7,200' 36: 5,800'		
Grid Mora 13 ⁷ / 10 ⁴	Elevation 1,804'	Accel 2,804'	Trans 12,000'			
ADD - GMB 07R/L – BRO3A/4A up to AB808 (for 25L/R BRO4B/5B UP TO AB214) → GM101 RWY18/GM003 RWY36				GMB - ADD (RWY18 → GM004) / (RWY36 → GM104) → AWASH RWY07R / (AB540- AB550 – AB110 RWY25L) or (AB440 – AB112 RWY 25L) GMB – ASO (RWY18 → GM004) / (RWY36 → GM104) – (SO117 Rwy11) / (SO225 R29)		
FIX -				ETP PNR HASO		
Depressurization escape route E of EGBIM: ↓FL135 Along airway UT139 → GUDER → AWASH/ARONA/ADS → HAAB (GUDER – UT139 - BRO)						
Be aware of a newly designated restricted area to the west on Radial 260/80NM GWZ. Addis center recommended to follow KOFTA then ARONA when flying back from Gambella.						Fire 6

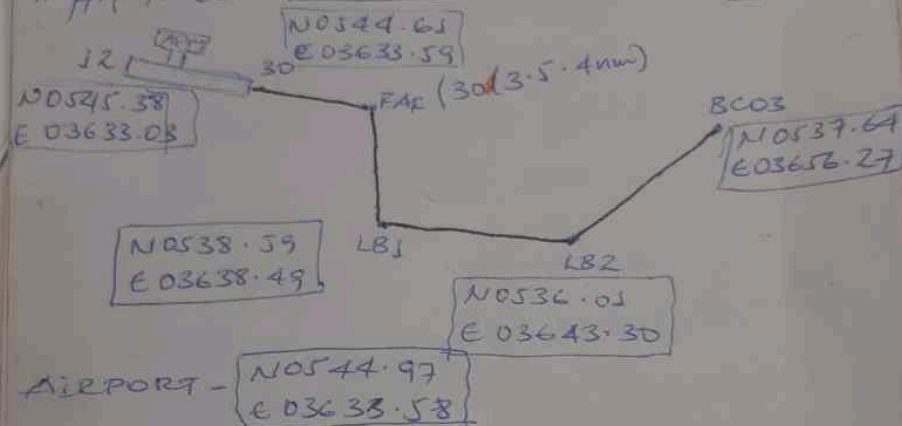
DEMBI DOLO – DEM- HADD N08 33 06.8059 E034 51 31.418						
RWY 1,880 X 30m Taxi way width: 18m	15 - 145° N08 33 32.6199 E034 51 15.2554 Elev: 5,236'	@6,236' DT H142 fp 6,236'		MDA	15	6,800' (TP)
	33 - 325° N08 32 42.6324 E034 51 50.0194 Elev: 5,161'	Climb at V2 @RWY END RT H190 fp 6,236'			33	6,800' (TP)
MSA	121.9 (Fire Brigade)		MAP 6,800' (TP)			
Grid Mora 13 ⁷	Elevation 5,236'	Accel 6,236'	Trans			
ADD - DEM 07R/L – BRO3A/4A up to AB808 (for 25L/R BRO4B/5B UP TO AB214) → RB RWY33			DEM - ADD RWY15 LT to - AWASH RWY07R / (AB540- AB550 – AB110 RWY25L) or (AB440 – AB112 RWY 25L)			
FIX -			ETP PNR HAGM, HASO			
Depressurization escape route E of EGBIM: ↓FL135 Along airway UT139 → GUDER → AWASH/ARONA/ADS → HAAB (GUDER – UT139 - BRO)						
- After 200m from end RWY15 there are long trees - Due to obstacles: Landing rwy is RWY 33 and Takeoff from RWY 15 - Airport doesn't have fence						Fire 6

GOBA/ROBE – GOB- HAGB N07 07.2 E040 02.7 Long final RWY 15: N07 16.6 E039 57.4						
RWY 2,500 X 30M	15 - 146° N07 07.9 E040 02.2	@8,800' LTH 080 fp 9,039'		MDA	15	9,600'
	33 - 326° N07 06.8 E040 02.9	@9,039' RTH 080 fp 9,039'			33	-
MSA -	118.4			MAP 15: 9,600'	15  33	
Grid Mora 16°, 12°	Elevation 8,093'	Accel 9,039'	Trans 14,000'/10,000'			
ADD - GOB 07R/L – SHALA2A/3A (25L/R- OKNET 1B/2B) – DEGAG/MASLO – Visual APP RWY 15				GOB - ADD RWY33 – MASLO / DEGAG – ARONA - 07 or AB440 – AB112 RWY25		
FIX				ETP PNR HALA, HAJM		
Depressurization escape route N of RUDOL: ↓FL130 → A.A along airway to OKNET → ↓FL125 → lcpt R193ADS (Course 013) / ARONA - OKNET - ADS R193/100NM – ADS						
- It is the highest elevation airport in Ethiopia - During T/O from RWY33, after liftoff, maintain runway heading until clear of terrain						Fire 6

JINKA – BACO – BCO- HABC Airport: N05 44.97 E036 33.58 BC03: N05 37.64 E036 56.27 LB2: N05 36.01 E036 43.30 LB1: 05 38.59 E036 38.49 FAF RWY 30: 3.5 – 4 NM from rwy						
RWY 2,480 X 45M	12 - 125° N05 45.38 E036 33.03	@Via H130 @5,503' LTH 125 fp 5,503'		MDA	12	6,000' (T.P)
	30 - 305° N05 44.61 E036 33.59	@5,503' DTH 303 fp 5,700'			30	6,000' (T.P)
MSA -	118.2 AMH/HAAM: 118.6 All stations: 125.9 121.9			MAP 6,000'		
Grid Mora 14²	Elevation 4,503'	Accel 12: 5,503' 30: 5,700'		Trans 14,000'		
ADD - GOB 07R/L – SHALA2A/3A (25L/R- OKNET 1B/2B) OR BENDO SID → BC03 →LB2→ LB1→ FAF RWY30				GOB - ADD RWY12 → ETGOM→BENDO → ARONA 07R or AB440 – AB112 RWY25L		
FIX				ETP PNR HAAM, HALA, HAJM		
Depressurization escape route N of RUDOL: ↓FL130 → A.A along airway to OKNET → ↓FL125 → lcpt R193ADS (Course 013) / ARONA - OKNET - ADS R193/100NM – ADS						
Request wxr from HAAM						Fire -

HABC/BCO

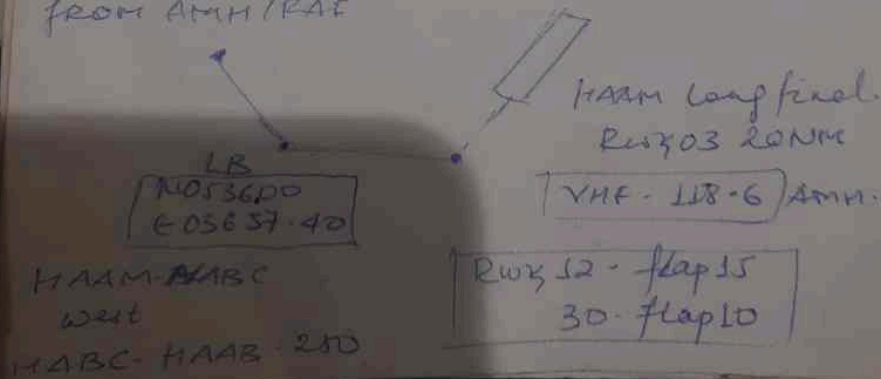
Rwy - 12/30 (125°/305°) - 2480 X 45m
 Elev - 4500, Acc - 12-5703, Trans - 14000
 Treffapatt - 6000' 30-5700, GRID - 134




Engine out - 12 - H130 @ 5703' LH 125 flap 5703
 30 - @ 5503' DTH 303 flap 5700


Dep - ↓ FL130 → MAAB UM308 → OKNOT, ↓ 125
 R193 ADS → ADD

from AMH/RAE




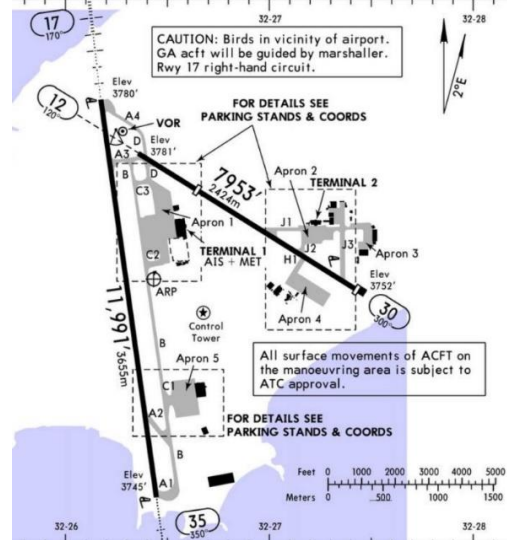
GODE – GDE- HAGO N05 56.1 E043 34.7						
RWY 2,400 X 35M	04 - 040°	@1,834' LTH 275 fp 1,834'		MDA	04	2,400' (T.P)
	22 - 220°	@1,834' RTH 300 fp 1,834'			22	2,400' (T.P)
MSA -	118.6			MAP 2,400' (T.P)	22  04	
Grid Mora 5 ³ , 6 ¹	Elevation 834'	Accel 1,834'	Traffic Pattern 2,400'	Trans 4,400'		
JIJ - GDE JIJ RWY 21/03 – XAPSA – EGMES – GDE RWY 04 OR RWY22				GDE - JIJ RWY04/22 – EGMES – XAPSA – JJ112/3 RWY03 OR JJ003 RWY21		
FIX				ETP PNR HAJJ, HADR		
Depressurization escape route ↓FL100						Fire 6
• Request GDE WXR FROM JIJ						

KEBRI DEHAR – ABK- HAKD						
N06 43.958 E044 14.476						
RWY 2,499 X 46M	08 N06 43.899 E044 13.813	@2,753’ DT H084 fp 2,753’		MDA	08	3,300’ (T.P)
	26 N06 44.0278 E044°15.149	@2,753’ DT H264 fp 2,753’			26	3,300’ (T.P)
MSA -	118.0 FT No twr			MAP 3,300’ (T.P)		
Grid Mora 6°	Elevation 1,753’	Accel 2,753’	Traffic Pattern 3,300’	Trans		
JIJ - ABK JIJ RWY 21/03 – LB RWY 08/ RB RWY26				ABK - JIJ RWY 08/26 - JJ112/3 RWY03 OR JJ003 RWY21		
FIX				ETP PNR HAJJ, HADR		
Depressurization escape route ↓FL100						Fire 6
- Station manager: Mesfin 09 15 04 78 39 for wxr - RWY 26: Elec. obstacle from the town - Check windsock on final						

GAROWE – GGR- HCGR						
RWY 2,450 x 40m	06 - 058 ⁰ N08 27.151 E048 33.535	@2,500’ DT H057 fp 2,500’		MDA	06	3,000’ (TP)
	24 - 238 ⁰ N08 27.865 E048 34.645	@2,500’ DT H237 fp 2,500’			24	3,000’ (TP)
MSA	Garowe twr: 118.4 Mogadishu: 132.5 HARGA/HGA/ HCMH: 118.7 TIBA: 126.9 Mog center 11300HF / 5517 / 13288			MAP 3,000’	 240 06	
Grid Mora 4 ²	Elevation 1,470’	Accel 2,500’	Traffic Pattern 3,000’	Trans 11 ⁵		
ADD – GGR O7R/L – MIWAS 2A/3A (25L/R - MAGON 2B/3B RNAV SID) – DWA – Exit: ARSHI or MURAL – HARGA – DAROT – RB Rwy24/ LB Rwy06 GGR				GGR - ADD GGR – DAROT – HARGA – ARSHI – AB505 KALTY - Rwy 07R/ AB111 RWY 25 GGR – BSA GGR – DAROT – LB Rwy27/ RB Rwy09		
FIX DWA, ARSHI, HARGA, DAROT				ETP PNR HADR, HAJJ, HCMH		
Depressurization escape route Before MIWAS: ↓ FL140 lcpt R080ADS (Course 260) - ↓12,500’ to 25NM ADS direct to AB111/KALTY After MIWAS: ↓13,500 → HADR Before ARSHI: ↓12,500 → HGA After ARSHI: ↓10,000 → HGA					Fire U	
- In Addis, when requesting startup report exit point. - 10min before exit point contact Mogadishu 132.5 or Hargeisa 118.7. (Report FL, Estimate, fuel endurance, aircraft type and registration) - In Garowe when requesting startup report fuel endurance						

BOSASO- BSA- HCMF						
RWY 3,200' x 45m	09 - 088° N11 16.30.035 E49 07 42.329	@500' LT H360 fp 1,033'		MDA	09	1,600' (TP)
	27 - 268° N11 16 31.547 E49 09 1.443	@1,033' RT H360' fp 1,033'			27	1,600' (TP)
MSA	Bosaso twr: 120.9 Mogadishu: 132.5 HARGA/HGA/ HCMH: 118.7 TIBA: 126.9 Mog center 11300 / 5517 / 13288			MAP 1,600'		
Grid Mora 9²	Elevation 40'	Accel 1,033'	Traffic Pattern 1,600'	Trans -		
-				BSA - ADD BSA – ESTIK – MERMI – ARSHI - AB505 - KALTY - Rwy 07R/ AB111 RWY 25		
FIX ESTIK, MERMI, HARGA, ARSHI, DWA				ETP PNR HCMH, HAJJ, HADR		
Depressurization escape route Before MIWAS: ↓ FL140 lcpt R080ADS (Course 260) - ↓12,500' to 25NM ADS direct to AB111/KALTY After MIWAS: ↓13,500 → HADR Before ARSHI: ↓12,500 → HGA After ARSHI: ↓10,000 → HGA					Fire 7	
- When requesting startup report fuel endurance - When contacting Mogadishu 132.5 or Hargeisa 118.7 Report FL, Estimate, fuel endurance, aircraft type and registration. - 10min before exit contact Addis.						

HARGEISA – HGA – HCMH N09 31.1 E044 05.4						
RWY 3,700 x 45m Airspace Class D	06 - 054° N09 30.7 E044 04.82	@5,471’ DT H054 fp 5,471’		MDA	06	’
	24 - 234° N09 31.47 E044 05.94	@5,471’ DT H234 fp 5,471’			24	’
MSA 8,800’	118.7 Mog center 11300HF / 5517 / 13288 / 5658			MAP -		
Grid Mora 8,800’	Elevation 4,471’	Accel 5,471’	Traffic Pattern 6,000’	Trans 8,000’		
ADD – HGA O7R/L – MIWAS 2A/3A (25L/R - MAGON 2B/3B RNAV SID) – DWA – Exit: ARSHI – Long final RWY06/ LB/RB RWY24				HGA - ADD RWY 24 – AB505 – KALTY -07R		
FIX DWA				ETP PNR HAJJ, HADR		
Depressurization escape route Before MIWAS: ↓ FL140 Icpt R080ADS (Course 260) - ↓12,500’ to 25NM ADS direct to AB111/KALTY After MIWAS: ↓13,500 → HADR Before ARSHI: ↓12,300 → HGA After ARSHI: ↓10,000 → HGA						Fire U
Arrival - When directed by ADD center contact Mogadishu on HF 3467, 5517 OR 11,300 VHF: 132.5, 132.7, 126.9 HF: 11300MH - Then contact HARGEISA TWR 118.7 - Daily plan for visual approach 06/24 Departure - Contact Hargeisa TWY for engine start and pushback - Extreme caution during pushback and txy - After departure IATA broadcast on 126.9 - Contact Mogadishu as directed by TWR						

UGANDA- ENTEBBE – EBB – HUEN (UTC+3)							
N00 02.4 E032 26.4							
RWY 3,655 x 45m	17 - 170°	@4,782’ DT H170 fp 4,782’			MDA	17	ILS: 3,980’ RNP: 4,200’
	35 - 350°	@4,782’ DT H350 fp 4,782’				35	RNP: 4,170’ VOR: 4,150’
MSA TAA 25NM IAF 6,000’	TWR: 118.1 RADAR: 126.6 CENTER: 128.5 ATIS: 120.2 NN(VOR): 117.5 EN(ILS): 110.7 TIBA: 126.9 (guard freq.) Nairobi Ctrl: 121.3				MAP FL080		
Grid Mora 6,800’	Elevation 3,784’	Accel 4,782’	Traffic Pattern 5,300’		Trans 7,000’		
EBB – ADD RWY 17 Left turn out – IMVIP – NABRO – PATAR (Exit to Kenya) – EKBUL (Exit to ETH) – ARONA 07R/AB440 – AB112 25L EBB - WAU RWY 17 Right turn out – UVBAX – UBETI – IMDEB – ATUGA (Exit to S.Sudan) – JUB – DASAG – WAU					ADD - EBB 07R – SHALA 2A/3A (Expect RT after departure) 25L SHALA 1B OR (25L/R- OKNET 1B/2B) – EKBUL (Exit to Kenya) – PATAR (Exit to Entebbe) – AVEXO - RWY17 WAU – EBB RWY 09/27 – DASAG – JUB – ATUGA (Exit to Uganda) – IMDEB – UBETI – UVBAX – UNBOL – AVEXO - RWY17		
FIX -					ETP PNR HKJK, HJJJ		
Depressurization escape route							Fire 9
EBB – ADD - NE of EKBUL: ↓ FL140 along airway ETGOM - ↓ FL135 – R193ADS- ↓ FL125 -ADS/ARONA/AWASH - SW of EKBUL: ↓ FL100 – proceed along airway to PATAR – Remain on the airway centerline or NW of airway – NABRO, PB OR NN VOR – ILS RWY 17 to EBB							

EBB – WAU						
- ↓ FL100						
SOUTH SUDAN – WAU - WUU – HJWW (UTC+2)						
N07 43.5 E027 58.5						
RWY 2,499 x 45m TORA & LDA: 2,175m	09 - 089° N07 43.55 E027 57.80	@2,527’ DTH087 fp 2,527’		MDA	09	3,100’ (T.P)
	27 - 269° N07 43.54 E027 59.16	@2,527’ DTH267 fp 2,527’			27	3,100’ (T.P)
MSA -	WAU: 119.2 JUB: 123.9/118.4 TIBA: 126.9 (guard freq.)			MAP 3,100’ (T.P)	09  27	
Grid Mora 4,400’	Elevation 1,527’	Accel 2,527’	Traffic Pattern 3,100’	Trans 6,000’		
WAU – EBB RWY 09/27 – DASAG – JUB – ATUGA (Exit to Uganda) – IMDEB – UBETI – UVBAX – UNBOL – AVEEXO - RWY17				EBB - WAU RWY 17 Right turn out – UVBAX – UBETI – IMDEB – ATUGA (Exit to S.Sudan) – JUB – DASAG – WAU		
FIX -				ETP PNR HJJJ		
Depressurization escape route					Fire U	
- ↓ FL100						

Tips for EBB – WAU flight

- Make sure you have the GD with you after passing the security
- FOs are responsible to take per diem for cockpit crews
- It's better to have a power bank with you.
- If you are going deadheading, check the aircraft position on masaya and go to the aircraft at least 1hr before departure
- After arriving in the hotel, during room reservation, the captain will tell you the wakeup call time
- Make yourself familiar with the airport layout (taxi way and rwy)

EBB/HUEN

- We use RWY 17/35 only (RWY12/30 is for military operation and as a taxiway to apron 4)
- T/o and ldg is usually on RWY17 (RNP or ILS RWY 17)
- When you request start up, Report exit point, fuel endurance and aircraft type (Dash 8D)
- 10min before exit point, contact the next airspace
- After ldg expect parking area to apron 1 or 4
- Sq. 2300

WAU/HJWW - UTC+2

- The performance file is in a separate PDF
- They will request your passport so make sure you have it
- It is a visual approach
- 10min before entering JUBA FIR report TIBA
- ATC will tell you the active rwy
- FO should fill the flight plan on paper
- Sq. 5200

TIBA (126.9)

- All station 2x, This is____, In/entering____ FIR, Checked position____@____, FL____(or crossing____to FL____), ____Bound direction, on ____airway, Estimating____@____
- ETH____@FL____, ____Bound, In/entering____ FIR

*Make sure you have all information for movement report in Addis

THE REPUBLIC OF SOUTH SUDAN CIVIL AVIATION AUTHORITY		SOUTH SUDAN		CHECK NO.	
A.T.C FLIGHT PLAN		Heading ZCZC		Transmission Identification	
Diversion q SP		For Traffic Use		FLIGHT PLAN	
PRIORITY ADDRESSEE (s)					
<< FF >>					
FILING TIME		ORIGINATOR			
SPECIFIC IDENTIFICATION OF ADDRESSEE (S) AND / OR ORIGINATOR					
3. MESSAGE TYPE F P L	7. AIRCRAFT IDENTIFICATION FH8483	8. FLIGHT RULES I	TYPE OF FLIGHT S		
9. NUMBER 01	TYPE OF AIRCRAFT DHC-8B	WAKE TURBULENCE CAT M	10. EQUIPMENT & CAPABILITIES 10a S C		
13. DEPARTURE AERODROME HJWW		TIME 1000			
15. CRUISING SPEED 304	LEVEL 230	ROUTE INRAX-UNBOL-UN-HUEX			
16. DESTINATION AERODROME HUEX		TOTAL EET HR MIN 02:04	1ST DEST ALTERNATE HBB4	2ND DEST ALTERNATE	
18. OTHER INFORMATION STS/		PBN/			
COM/	NAV/	DAT/		DOF/	
REG/	EET/	DEST/			
SEL/	OPR/	ALTN/			
RMK/					
19. ENDURANCE HR MIN 00:29					
SUPPLEMENTARY INFORMATION (NOT TO BE TRANSMITTED IN FPL MESSAGE)					
PERSONS ON BOARD 10		EMERGENCY RADIO UHF ☒ VHF ☐ ELSA ☐			
POLAR ☐ DESERT ☐ MOUNTAIN ☐ JUNGLE ☐		JACKETS LIGHT ☐ FLOURES ☐ UHF ☐ VHF ☐			
DINGIES ☐ NUMBER ☐ CAPACITY ☐ COVER ☐		COLOUR ☐			
AIRCRAFT COLOUR AND MARKINGS A/ WHITE					
REMARKS N/ TCAS					
PILOT IN COMMAND C/ MIEIAS					
PILOT/REPRESENTATIVE NAME Signature		ATS PERSONNEL NAME Signature		RESERVED FOR ADDITIONAL INFORMATION	

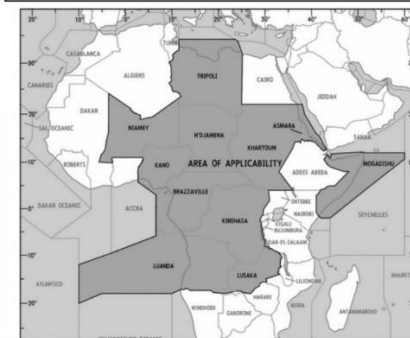
< Back Enroute Data - Africa

Automatic Dependent
Surveillance Broadcast - ADS-B
Secondary Surveillance Radar
- SSR
HF Communications
IATA In-Flight Broadcast
Procedure - Africa
CPDLC Coverage - Africa
AIRWAY RESTRICTIONS - AFRICA
LOWER AND UPPER AIRSPACE

¹ Brazzaville, Niamey and N'Djamena FIRs provide CPDLC services, however these FIRs are maintained in IFBP area of applicability to accommodate users' requirement for linear boundaries to the extent feasible

NOTE:

Dakar Terrestrial and Dakar Oceanic FIR's apply IFBP only in the case of the activation of their contingency plans.



LISTENING WATCH

A listening watch should be maintained on the designated frequency (126.9MHz), 10 minutes before entering the designated airspace until leaving this airspace. For an aircraft taking off from an aerodrome located within the lateral limits of the designated airspace, listening watch should start as soon as appropriate and be maintained until leaving the airspace.

TIME OF BROADCAST

A broadcast should be clearly pronounced in English:

- 10 minutes before entering an FIR within IFBP region;
- upon entering an FIR within the IFBP region;
- as soon as practicable when departing from an aerodrome located within the IFBP region;
- 10 minutes prior to crossing or joining an ATS route, report crossing airway or waypoint;
- every 20 minutes;
- before a change in flight level;
- upon reaching the intended flight level;
- at any other time considered necessary by the pilot.

BROADCAST PROCEDURE

A broadcast message should be structured as follows:

- ALL STATIONS
- THIS IS ABC123... (flight number) IN THE XXXX (FIR name) FIR
- POSITION AAAAA (current position)
- AT... : ... UTC
- FL... (altitude maintaining)
- DIRECTION BOUND (direction)
- ON XX987 (airway)
- ESTIMATING BBBB (next position; waypoint or crossing airway if no waypoint)
- AT... : ... UTC
- CCCCC NEXT (subsequent position; waypoint or crossing airway if no waypoint)
- ABC123... (flight number) AT FL... (altitude maintaining) DIRECTION BOUND (direction) IN THE XXXX (FIR name) FIR

CREATING NEW AIRPORT RUNWAY AND APPROACH

(With example airport HAZZ RWY09/27...just for example...)

1. Airport

- DATA → PILOT DATA → AIRPORT → GIVE NAME on right top WPT (If the FMS knows the airport, no need to create new one. But If you want to create the airport by yourself give it name eg. HAZZ1) → on the right side set **coordinates** → Set **elevation** → Accept airport

2. Runway

- DATA → PILOT DATA → RUNWAY → Select airport → Create → Runway **number** → Set **coordinates** → Set runway **heading** → Set runway **elevation** → Set runway **length** → Accept
- Do the same for the other runway

3. Approach

- DATA → PILOT DATA → APPROACH → Select airport → APP DEFN (Lower left side) → Select runway → VFR → LEG TO EOA: Final course/Distance: (Eg. 090.0°/5.0NM) → **next page** → **Flight path angle (Lower left side): 3.00°** (It will give you the altitude for the FAF) → Return
- Do the same for the other runway

4. Way point for the base leg or long final

- PILOT DATA → WAY POINT → Give name (right top side) (Eg. RB09) → REFERENCE WAYPOINT: HAZZ → Radial (reciprocal of the course +/- 30°)/Distance (8 or 10NM) (Eg. 240.0°/10.0NM) → Accept
- Do the same for the other runway

5. Refine the Approach

- PILOT DATA → APPROACH → AIRPORT → APPROACH #1/#2 → TRANSITION (Eg. RB09) → APP DEFF → Next page → Select the 2nd (Eg. A 2. FAF 09...) → INITIAL FIX → INITIAL FIX: (Eg. RB09) → Accept → Accept again → Select the 1st. (1. *VFR 09*) → INITIAL FIX → INITIAL FIX: (Eg. RB09)
- This will make the *VFR 09* like sandwich
- Do the same for the other runway



QRH

1. Cockpit preparation
2. Normal checklist
3. Performance
4. Air conditioning, pressurization and pneumatics
5. APU, engines and propellers
6. Auto flight, flight instruments and navigation
7. Fuselage fire, smoke or fumes
8. Emergency landing and forced landing
9. Electrical
10. Flight controls
11. Fuel
12. Hydraulic power
13. Ice and rain protection, stall protection
14. Landing gear
15. PFD, MFD ED annunciations, Caution and warning light