



# EXISTING PLAN

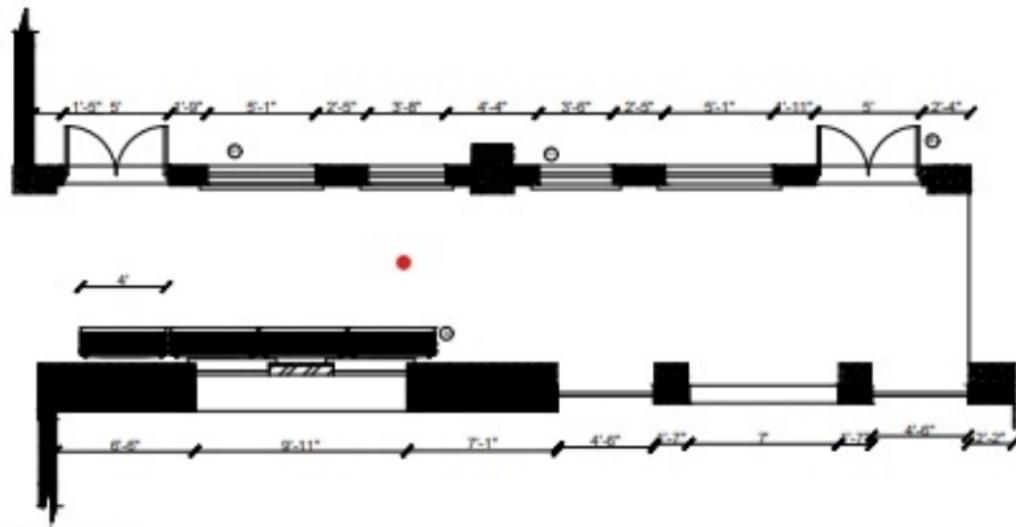



	brick	20'x3	wooden benches
	double door	8' length & height	2 doors are placed.
	window	3' length	wooden window with glass
	block	7' thickness	wooden window with glass
			brick paving is done

# EXISTING CEILING

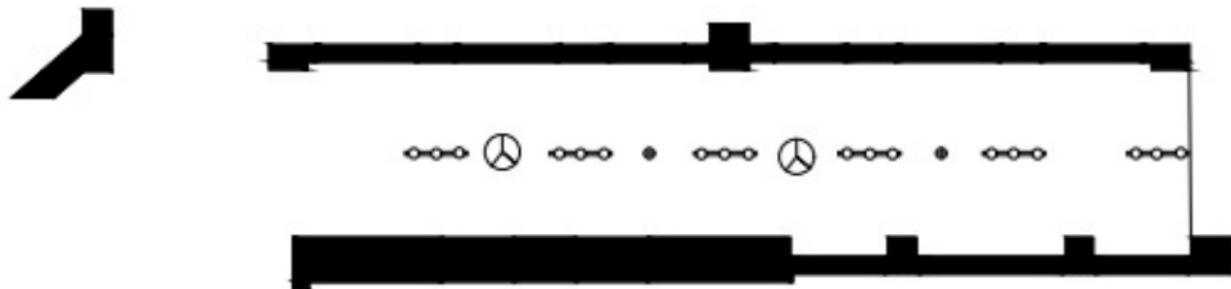

SYMBOLS	NAME	DESCRIPTION
⊕	four spot	(A) four spot with recessed lighting and a diffusing
○	one	(B) one spot placed Recessed lighting for each recessed lighting fixture and a diffusing
○	optional	(C) optional

## PROPOSED PLAN

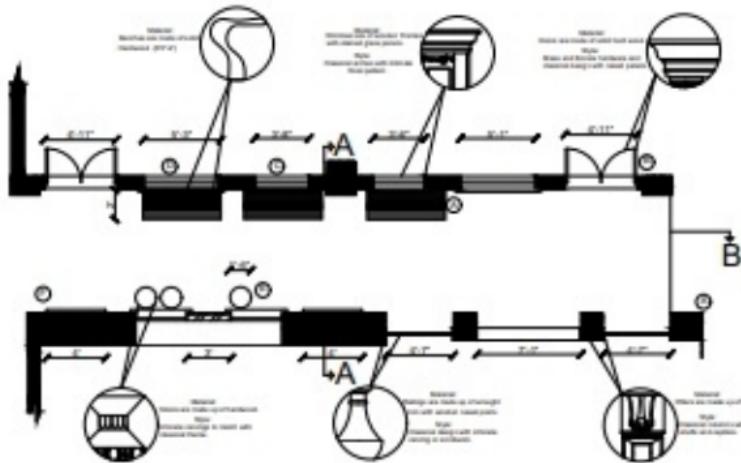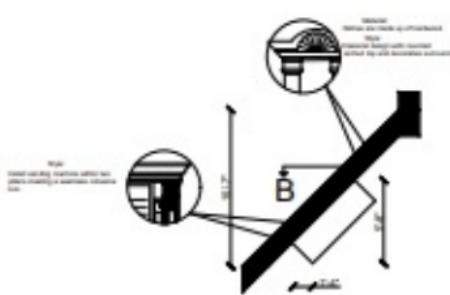

	Bench	2-10A	Devices are required and maintained by the customer.
	Door	3-10B	A communication path is established with the provider and administrator.
	Windows	3-10C	A communication path is established between the customer and the provider.
	Windows	3-11C	A communication path is established between the customer and the provider.
	Steel	3-11D-11E	Steel is required as a hardware component for the provider to use.
	Panel	4-12	A communication path is established between the customer and the provider.
	Brick	4-13 Indefinite	brick partitioning is defined as multi-layered concrete walls.

# PROPOSED CEILING



—	—	—
◎	Hanging light	2
●	Sconce light	20
○	Fan	1
—	Recessed light	1
---	Multi-light bar	1
□	Mosaic tiles	1/2

# FLOORING

