

**INSTRUMENT
APPROACH
CHART - ICAO**


Note : Approach under ICAO Flight Procedures.

AERODROME ELEV 23 ft
HEIGHTS RELATED TO
THR RWY 15L - ELEV 23 ft

SEOUL APP 119.75
INCHEON TWR 121.35
118.2
118.8

SEOUL/Incheon Intl(RKSI)

RNP RWY 15L

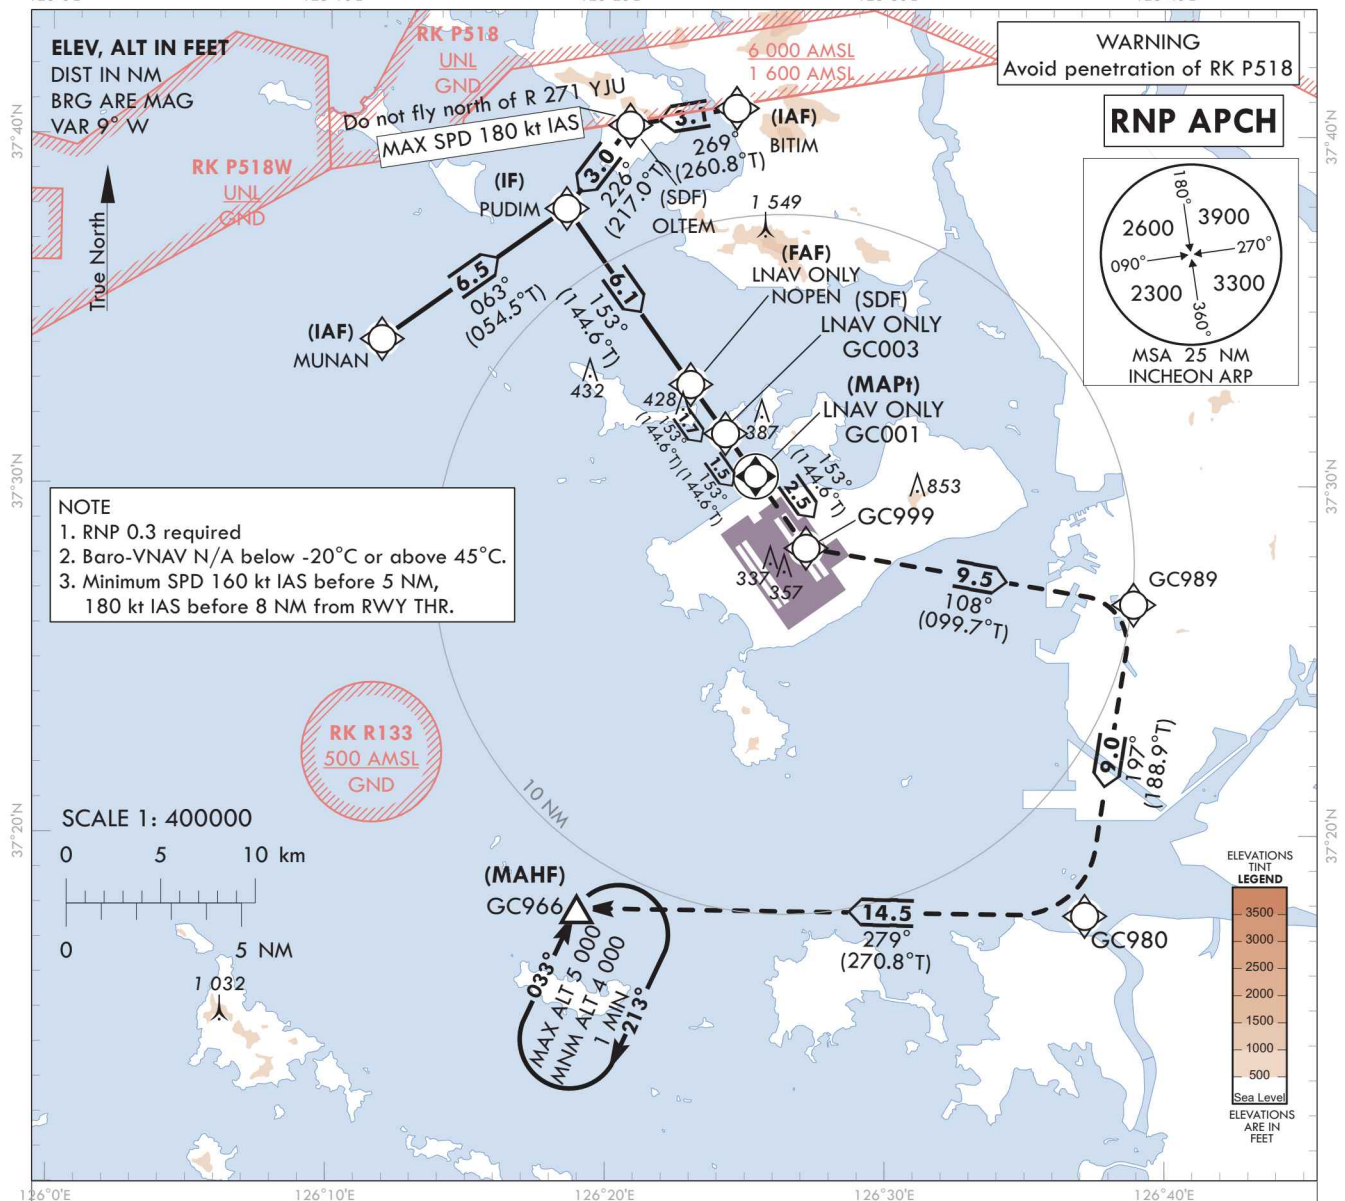

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH

Climb to 4 000 ft. Track to GC999, GC989, GC980 and GC966. Hold as published.

NOTE

1. Missed approach turn limited to 210 kt IAS maximum at GC999 and GC989.

The diagram illustrates a missed approach procedure starting 10 NM from THR RWY 15L. The track includes a 2100' obstacle clearance area (OCA) and a 680' obstacle clearance area. The track is divided into segments with specific altitudes and distances. The track is labeled with 'NM FROM THR RWY 15L' and 'ELEV 23'.

Point	Altitude (ft)	Distance (NM)	Angle (°)
IAF BITIM	3 500 (3 000) (2 977)	10	269°
IAF MUNAN	3 000 (2 977)	10	063°
SDF OLTEM	3 000 (2 977)	10	226°
IF PUDIM	3 000 (2 977)	10	063°
FAF NOEN	1 600 (1 577)	5	153°
SDF GC003	1 000 (977)	3	5.3% (3.0°)
MAPt GC001	1 000 (977)	2	5.3% (3.0°)
GC999	1 000 (977)	1	153°
GC989	1 000 (977)	0	108°
GC980	1 000 (977)	0	191°
GC966	1 000 (977)	0	279°

OCA (H)

A

B

C

D

Knots

60

90

120

150

180

Straight-in Approach

LNAV/VNAV

460 (437)

LNAV

540 (517)

Rate of descent

V/V fpm

324

485

647

809

971

* Timing Not authorized for defining MAPt.

* Circling Not authorized.

SEOUL/Incheon Intl(RKSI)
RNP RWY 15L

AERONAUTICAL DATA TABULATION

Instrument Approach Procedure Coding Tables

RNP RWY 15L - via MUNAN(IAF) to GC966(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	MUNAN	-	-	-	-	+3 000	-	37°34'09.3"N 126°11'53.0"E	-	RNP APCH	IAF
002	TF	PUDIM	-	063 (054.5)	6.5	-	+3 000	-	37°37'54.2"N 126°18'30.0"E	-	RNP APCH	IF
003	TF	NOPEM	-	153 (144.6)	6.1	-	+1 600	-	37°32'53.5"N 126°22'58.5"E	-	RNP APCH	FAF
004	TF	GC003	-	153 (144.6)	1.7	-	+1 000	-	37°31'29.2"N 126°24'13.7"E	-	RNP APCH	SDF
005	TF	GC001	Y	153 (144.6)	1.5	-	+540	-	37°30'15.70"N 126°25'19.14"E	-3.05/50	RNP APCH	MAPt
006	TF	GC999	-	153 (144.6)	2.5	-	-	-210	37°28'13.2"N 126°27'08.2"E	-	RNP APCH	-
007	TF	GC989	-	108 (099.7)	9.5	-	-	-210	37°26'36.8"N 126°38'53.7"E	-	RNP APCH	-
008	TF	GC980	-	197 (188.9)	9.0	-	-	-	37°17'42.5"N 126°37'09.6"E	-	RNP APCH	-
009	TF	GC966	-	279 (270.8)	14.5	-	+4 000	-	37°17'53.0"N 126°18'58.0"E	-	RNP APCH	-
010	HM	GC966	Y	033 (024.8)	-	R	-5 000 +4 000	-	37°17'53.0"N 126°18'58.0"E	-	RNP APCH	1 min (Outbound timing)

RNP RWY 15L - via BITIM(IAF) to GC966(MAHF)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	BITIM	-	-	-	-	-3 500 +3 000	-	37°40'48.0"N 126°24'36.1"E	-	RNP APCH	IAF
002	TF	OLTEM	-	269 (260.8)	3.1	-	@3 000	-180	37°40'18.2"N 126°20'46.3"E	-	RNP APCH	SDF
003	TF	PUDIM	-	226 (217.0)	3.0	-	+3 000	-	37°37'54.2"N 126°18'30.0"E	-	RNP APCH	IF
004	TF	NOPEM	-	153 (144.6)	6.1	-	+1 600	-	37°32'53.5"N 126°22'58.5"E	-	RNP APCH	FAF
005	TF	GC003	-	153 (144.6)	1.7	-	+1 000	-	37°31'29.2"N 126°24'13.7"E	-	RNP APCH	SDF
006	TF	GC001	Y	153 (144.6)	1.5	-	+540	-	37°30'15.70"N 126°25'19.14"E	-3.05/50	RNP APCH	MAPt
007	TF	GC999	-	153 (144.6)	2.5	-	-	-210	37°28'13.2"N 126°27'08.2"E	-	RNP APCH	-
008	TF	GC989	-	108 (099.7)	9.5	-	-	-210	37°26'36.8"N 126°38'53.7"E	-	RNP APCH	-
009	TF	GC980	-	197 (188.9)	9.0	-	-	-	37°17'42.5"N 126°37'09.6"E	-	RNP APCH	-
010	TF	GC966	-	279 (270.8)	14.5	-	+4 000	-	37°17'53.0"N 126°18'58.0"E	-	RNP APCH	-
011	HM	GC966	Y	033 (024.8)	-	R	-5 000 +4 000	-	37°17'53.0"N 126°18'58.0"E	-	RNP APCH	1 min (Outbound timing)