



**POWERED FOR  
PERFORMANCE®**

# PRO MASTER®



The **DEKA PRO MASTER BATTERY** will give you all the power you need to get through two rounds comfortably without needing a recharge – providing it is maintained and charged correctly.

The **DEKA PRO MASTER BATTERY** includes a variety of design features that allow for easy watering and installation, faster maintenance turnaround times and longer cycle life.

The **DEKA PRO MASTER BATTERY** is made with pride by quality craftsmen in our state-of-the-art manufacturing facilities, and subjected to over 250 rigorous quality control checks during every phase of production.

CONVENIENT  
LIFTING HANDLE



QUALITY SYSTEM  
CERTIFIED TO  
**ISO 9001**  
**ISO/TS 16949**  
**ISO 14001**





# 

FEATURES	BENEFITS
• High density oxide paste...	• Produces more energy per pound.
• Integrated "twist-and-release" vent cap "quick fill" system...	• Releases vent caps in single motion design, making maintenance a snap. Leakproof design.
• Ergonomic lift handles...	• Reduces the risk of slippage. Designed for easier installation.
• Heavier grids and plates...	• Provides longer cycle life, better added value.
• Thicker plate straps...	• Lowers resistance, delivers better performance, longer life.
• Heavy-duty, bulge-resistant material...	• Stabilizes and protects the groups for polypropylene casing longer battery life. Resists bulging.
• Case heat sealed to the cover...	• Ensures leakproof design.
• Through-partition connectors...	• Decreases internal resistance, increasing power.
• Computer-controlled production...	• Assures that grid casting, plate pasting, curing, and formation meet rigid quality specifications.
• Glass mat, dual-insulation, "deep pocket" envelope separators...	• Protects plates and locks active material to the grid to retard shedding and prevent shorts. Glass fibers strengthen plate.
• Three terminal configurations...	• Fits virtually any application.
• Over 250 quality control checks...	• Assures the highest quality.

PART NO.	20 AH RATE	6 AH RATE	MINS. DISCHARGED			VOLTS	QTS. (LITERS) OF ACID	APPROXIMATE WEIGHT lbs. (kgs.)		MAXIMUM OVERALL DIMENSIONS inches (mm)			FOOTNOTES
			@ 75 AMPS	@ 56 AMPS	@ 25 AMPS			WET	DRY	L	W	H	
GOLF CAR													
GC10	190	156	100	—	—	6	—	59 (26.8)	—	10% (260)	7% (181)	10% (276)	11,34,U
GC15	215	178	115	—	—	6	—	63 (28.6)	—			10% (276)	4,11,34,U
GC25	235	—	132	—	488	6	—	67 (30.4)	—			11% (283)	5,11,0
GC25G	235	—	132	—	488	6	—	67 (30.4)	—			11% (283)	5,11,G
GC8V	165	—	85	121	318	8	—	67 (30.4)	—			11% (283)	4,11,0
GCSTRAP	Golf Car Strap Handle when ordered individually. One strap shipped per full pallet of 6-volt golf car batteries.												
For gas engine golf cars:													
12-VOLT GOLF CAR STARTING BATTERY													
426G	560CA	450CCA	60RC			12	—	26 (11.8)	—	8% (222)	6% (171)	8 (203)	17.22.G

Vent Cap Information: All batteries are shipped with quick release one-quarter turn gang vent caps. To order individual vent caps on batteries, add a "V" suffix i.e., GC15V, etc.

All batteries are wet.

All above types have microporous polyethylene envelope separators with glass mat (except 424/26G).

424/26G battery has microporous, polyethylene envelope separators.

All batteries manufactured in polypropylene cases.

All ratings conform to B.C.I. specifications.

Dry = Up to 10% reduced capacity.

## FOOTNOTES:

Unless otherwise noted all batteries are: Black Cover/Black Case

4 - Charcoal Grey Cover and Case

5 - Green Cover/White Case

11 - Low maintenance - Low antimony grids

17 - Includes handle

22 - Flush manifold vented cover


34 - Ratings after 15 cycles

G - Offset post w/ horizontal hole, stainless steel 5/16" bolt and hex nut

O - Offset post w/ vertical stainless steel 5/16" stud and hex nut

U - Molded-in offset SAE post and vertical 5/16" NEG., 5/16" POS. stainless steel studs and hex nuts

## TERMINAL SELECTIONS

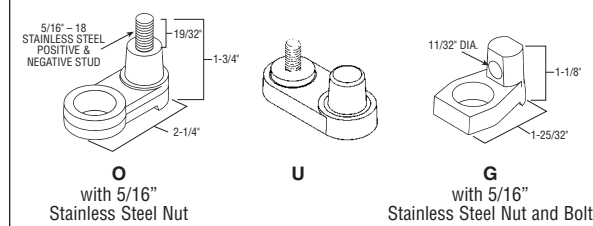

**"POWERED FOR PERFORMANCE"®**

DISTRIBUTED BY:

**EAST PENN manufacturing co., inc.**

Lyon Station, PA 19536-0147 • Phone: 610-682-6361 • Fax: 610-682-4781

Order Department Hotline: 610-682-4231

www.dekabatteries.com • e-mail: eastpenn@eastpenn-deka.com

E.P.M. Form No. 0248 Rev. 10/08 © 2008 by EPM Printed in U.S.A.

All data subject to change without notice.  
No part of this document may be copied or reproduced, electronically or mechanically, without written permission from the company.