

V9958 PICO FUNCTIONAL TESTER — PROTOTYPE REV 0.2


Checks V9958 ID, CPU interface, 128 KiB VRAM, clocks/sync, interrupt and RGB response; buffered DIN RGB output.


WARNING: power off before inserting/removing V9958 or VRAM. Use a current-limited 5V / 1A USB supply.


Behavioral V9958 test only; a pass is not forensic proof of Yamaha manufacture.

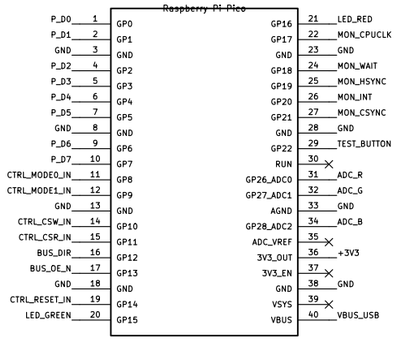








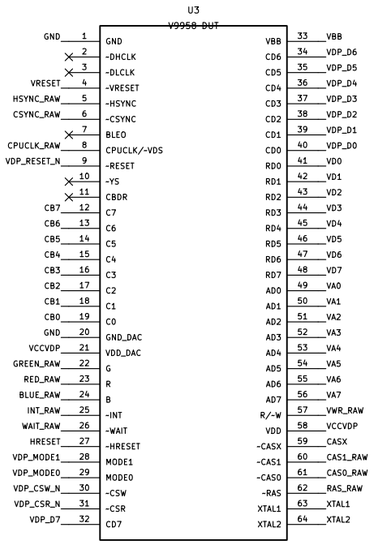























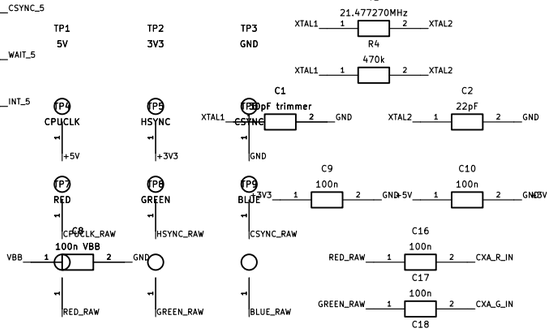














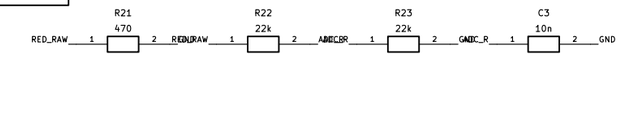



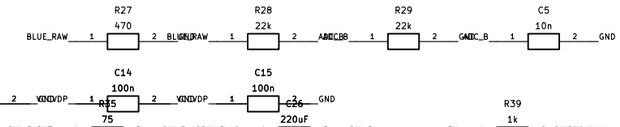

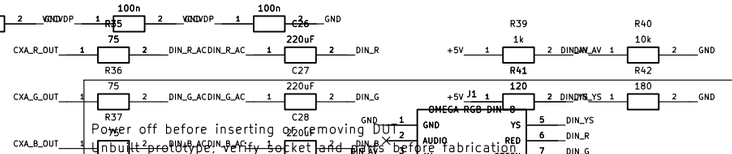

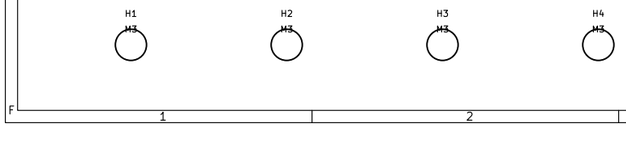

Power off before inserting or removing DUT.

Unbuilt prototype: verify socket and pinout before fabrication.

Omega side project

Sheet: V9958-Tester.kicad_sch

File: V9958-Tester.kicad_sch

Title: V9958 Pico Functional Tester

Size: A3	Date: 2026-11-06	**Rev: 0.2 — PROTOTYPE**
KiCad E.D.A. 10.0.8		Id: 1/1