

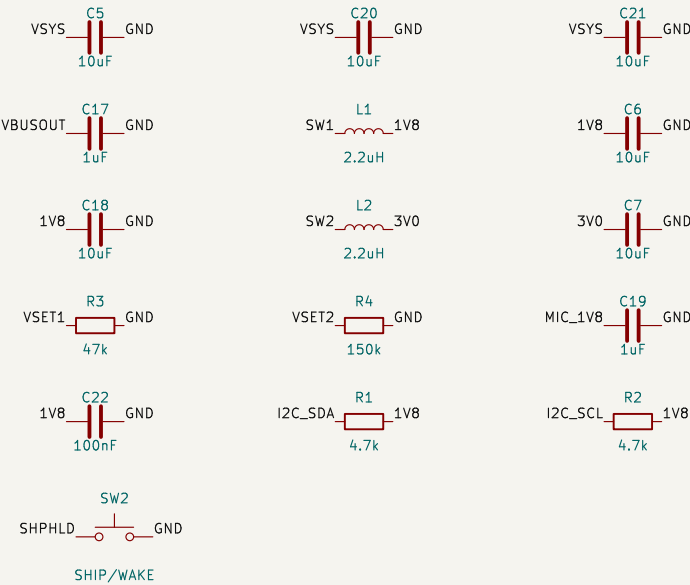



POWER – USB-C, nPM1300 (PS v1.2.1 Config 1), battery

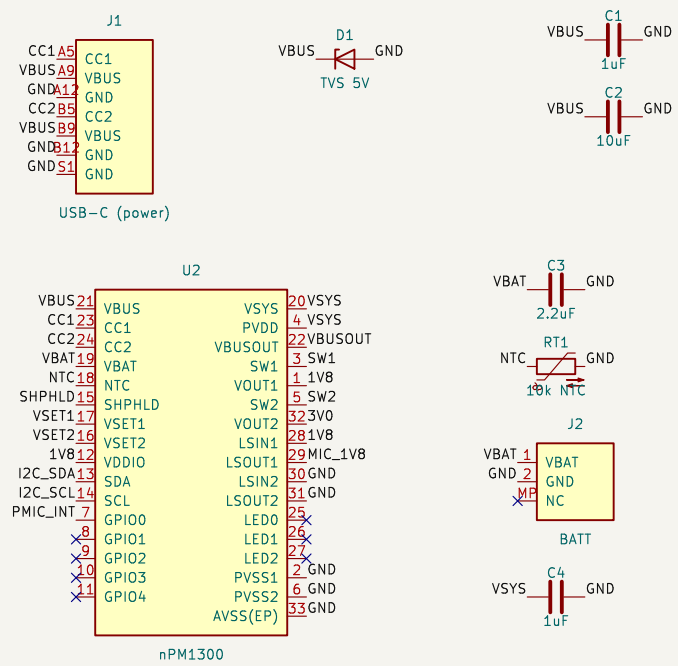


RADIO – Ezurio BL54L15u (nRF54L15)

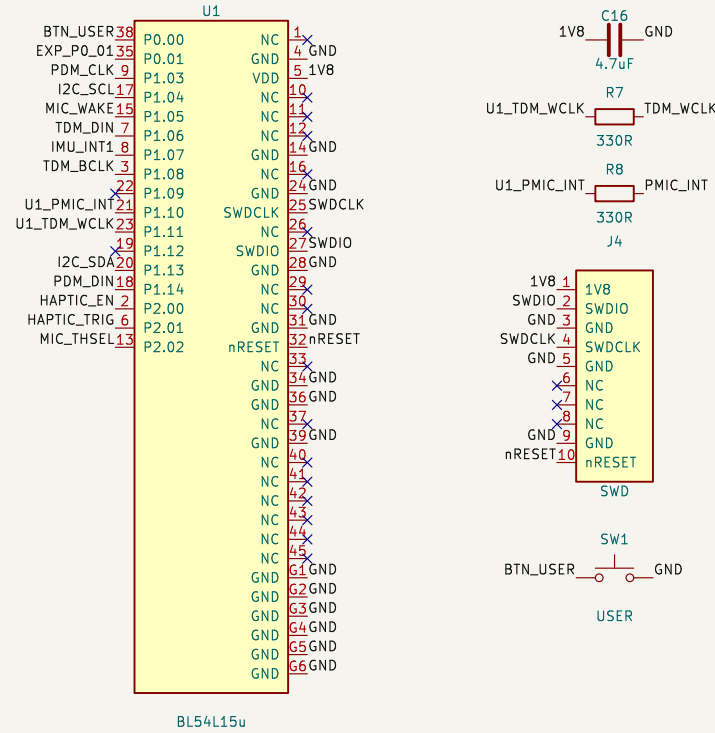


HAPTICS – DRV2605L + LRA

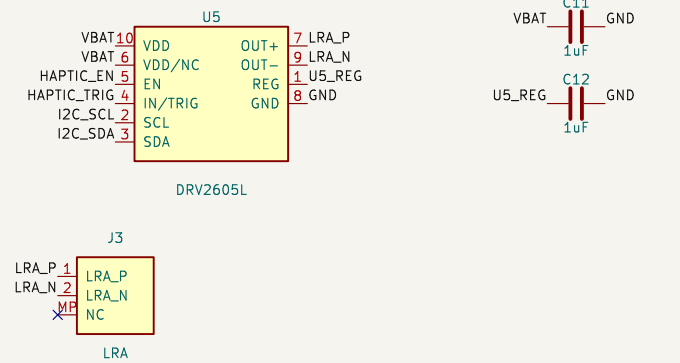

SENSORS – T5838 mic, LSM6DSV16BX bone conduction + touch

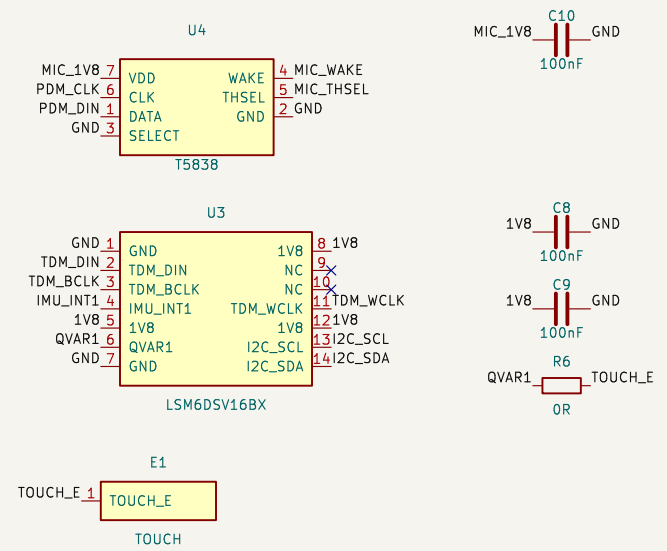

HEADERS AND TEST POINTS

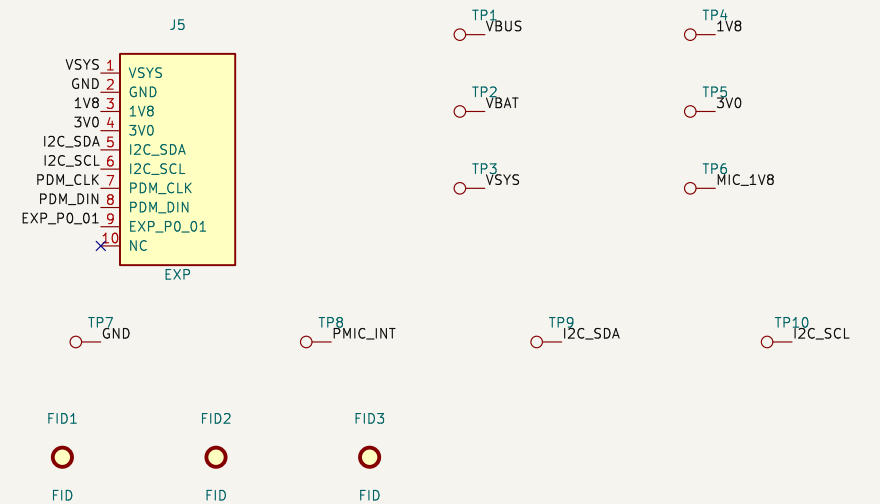

NOTES

Ezurio Note 7: P1.09–P1.12 toggle below 1 MHz behind ≥ 330 R (R7–R8); no I2C or fast clocks there. J5 takes the V2S200D eval board: PDM left channel (T5838 is right).
Generated by make_schematic.py from devboard_circuit.py – edit the circuit file, not this sheet.
OPEN: nPM1300 TWI DC input limits (not tabulated in PS v1.2.1); bench–check I2C low level at 400 kHz.
OPEN: shared PDM bus – T5838 right channel (SELECT=GND), external V2S200D on J5 must select left.
Firmware: charger off at reset; select the 10k NTC (ADNCTCRSEL) and 32 mA before enabling charging.
Firmware: LOADSW1 (MIC_1V8) off at reset – enable only after BUCK1 is confirmed at 1.8 V.

Radio module footprint: see README for status Source: hardware/devboard/devboard_circuit.py Cue
Sheet: / File: cue_devboard.kicad_sch

Title: Cue rev A dev board

Size: A3	Date: 2026-10-05
----------	------------------

KiCad E.D.A.	kicad-cli 7.0.11+dfsg-1build4
--------------	-------------------------------

Rev: A

d: 1/1