

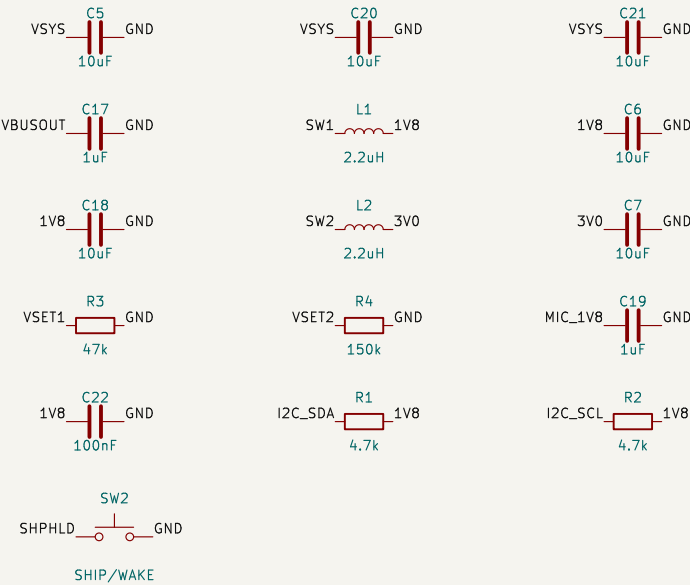



POWER – USB-C, nPM1300 (PS v1.2.1 Config 1), battery

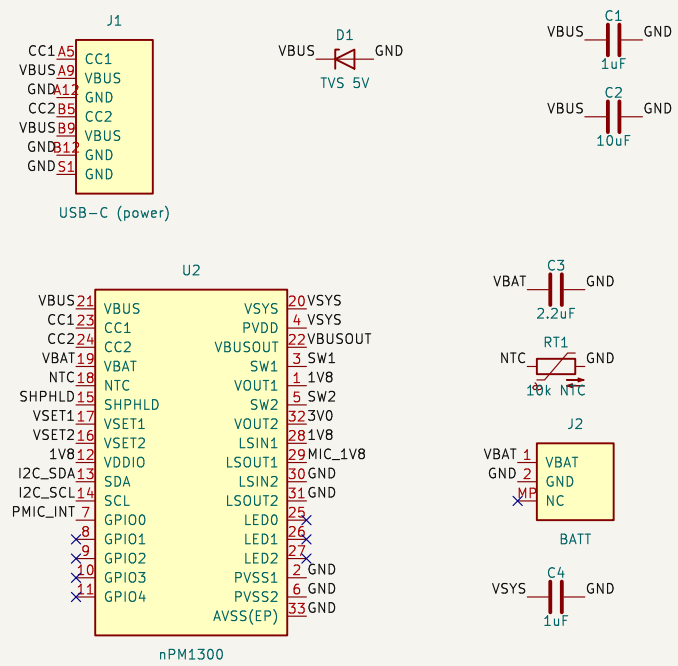


**RADIO – Ezurio BL54L15u (nRF54L15)**

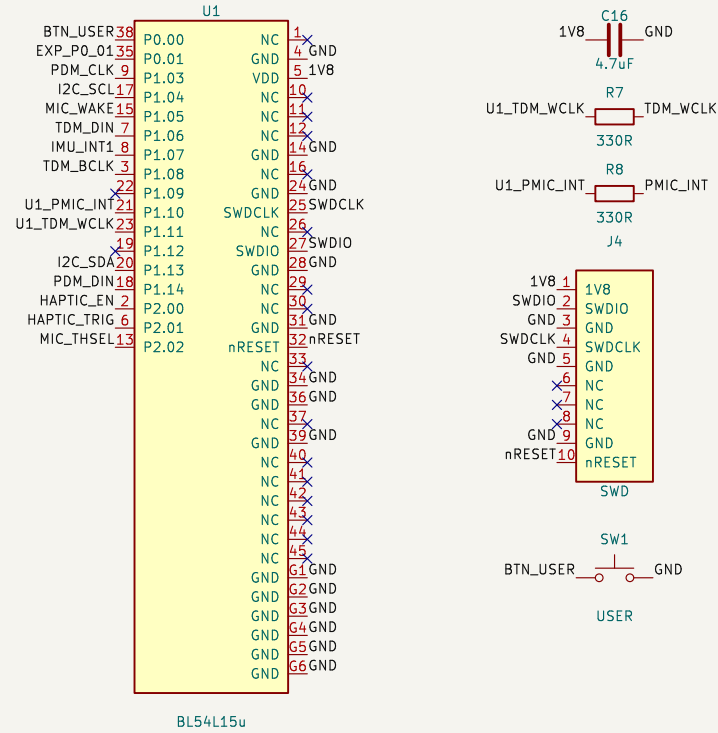


**SENSORS – T5838 mic, LSM6DSV16BX bone conduction + touch**

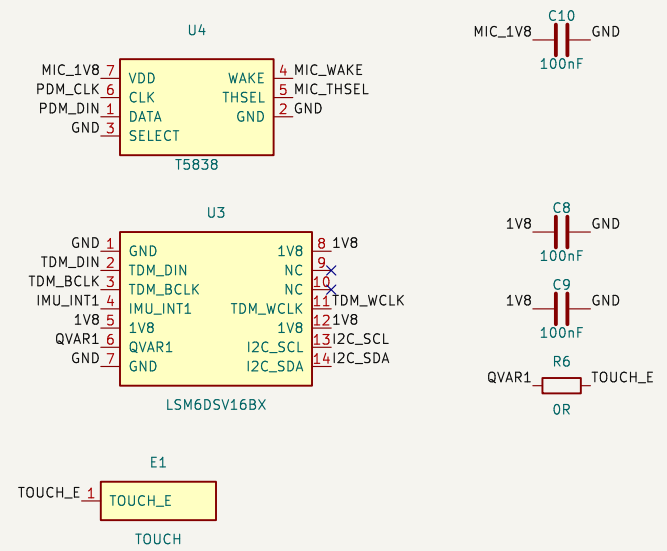

## HEADERS AND TEST POINTS

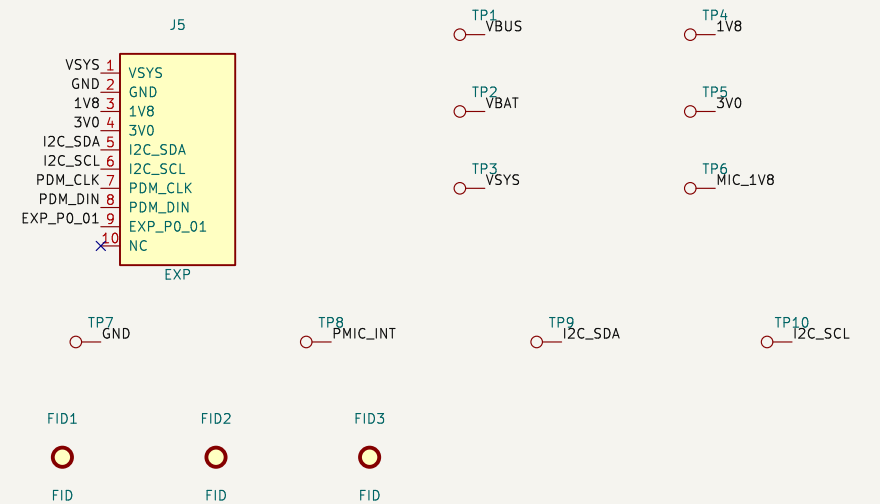

## HAPTICS – DRV2605L + LRA

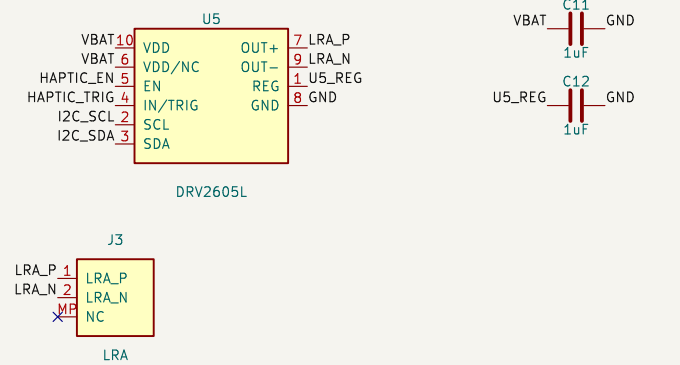

## NOTES

Ezurio Note 7: P1.09–P1.12 toggle below 1 MHz behind  $\geq 330\text{ R}$  (R7–R8); no I2C or fast clocks there. J5 takes the V2S200D eval board: PDM left channel (T5838 is right).  
Generated by make\_schematic.py from devboard\_circuit.py – edit the circuit file, not this sheet.  
OPEN: nPM1300 TWI DC input limits (not tabulated in PS v1.2.1); bench–check I2C low level at 400 kHz.  
OPEN: shared PDM bus – T5838 right channel (SELECT=GND), external V2S200D on J5 must select left.  
Firmware: charger off at reset; select the 10k NTC (ADNCTCRSEL) and 32 mA before enabling charging.  
Firmware: LOADSW1 (MIC\_1V8) off at reset – enable only after BUCK1 is confirmed at 1.8 V.

|                                                                                                              |
|--------------------------------------------------------------------------------------------------------------|
| Radio module footprint: see README for status<br>Source: hardware/devboard/devboard_circuit.py<br><b>Cue</b> |
| Sheet: /<br>File: cue_devboard.kicad_sch                                                                     |

**Title: Cue rev A dev board**

|          |                  |
|----------|------------------|
| Size: A3 | Date: 2026-10-05 |
|----------|------------------|

|              |                               |
|--------------|-------------------------------|
| KiCad E.D.A. | kicad-cli 7.0.11+dfsg-1build4 |
|--------------|-------------------------------|

|  |  |   |
|--|--|---|
|  |  | 7 |
|--|--|---|

Rev: A

d: 1/1