HOMEWORK I
## Due day: 3:00pm Oct. 20 (Wednesday), 2021

# Introduction

This homework is to let you be familiar with SystemVerilog and CPU design.

After this homework, you will complete a simplified pipeline CPU with *33* instructions.

# General rules for deliverables

- This homework needs to be completed by **INDIVIDUAL** student.
- Compress all files described in the problem statements into one tar file.
- Submit the compressed file to the course website before the due day.
  **Warning!** AVOID submitting in the last minute. Late submission is not accepted.

# Grading Notes

- **Important!** DO remember to include your SystemVerilog code. NO code, NO grades. Also, if your code can not be recompiled by TA successfully using tools in SoC Lab and commands in Appendix B, you will receive NO credit.
- Write your report seriously and professionally. Incomplete description and information will reduce your chances to get more credits.
- If extra works (like synthesis, post-simulation or additional instructions) are done, please describe them in your final report clearly for bonus points.
- Please follow course policy.
- Verilog and SystemVerilog generators aren't allowed in this course.

# Deliverables

1. All SystemVerilog codes including components, testbenches and machine codes for each problem. NOTE: Please DO NOT include source codes in the report!
2. Write a homework report in MS word and follow the convention for the file name of your report: *N260XXXXX.docx*. Please save as docx file format and replace N260XXXXX with your student ID number. (Let the letter be uppercase.)
3. Organize your files as the hierarchy in Appendix A.

HOMEWORK I

# Report Writing Format

a. Use the submission cover which is already in provided *N260XXXXX.docx*.

b. A summary in the beginning to state what has been done.

c. Report requirements from each problem.

d. Describe the major problems you encountered and your resolutions.

e. Lessons learned from this homework.

# Problem 1 (100/100)

## 1.1 Problem Description

In this course, we use the RISC-V instruction set architecture (ISA) to implement a pipelined CPU. The RISC-V ISA is composed of one base integer instruction set and some standard extensions. For simplicity of implementation, the homework of this course focuses on the RV32I base integer instruction set.

You need to implement a simplified pipeline CPU with the following features:

a. The RISC-V ISA with the specified 37 instructions.

b. The number of pipeline stage is 5.

c. Register file size: 32×32-bit.

d. Program counter with 32-bit.

e. Mechanism to solve data hazard, control hazard and structural hazard.

You also need to use two memories outside the CPU with specified size:

a. Instruction memory size: 64KB.

b. Data memory size: 64KB.

Your RTL code should comply with Superlint within **85%** of your code. Besides, you should use programs listed in Section 1.5 to verify your design. Note that you **need to synthesize** your design. A more detailed description of this problem can be found in Section 1.4.
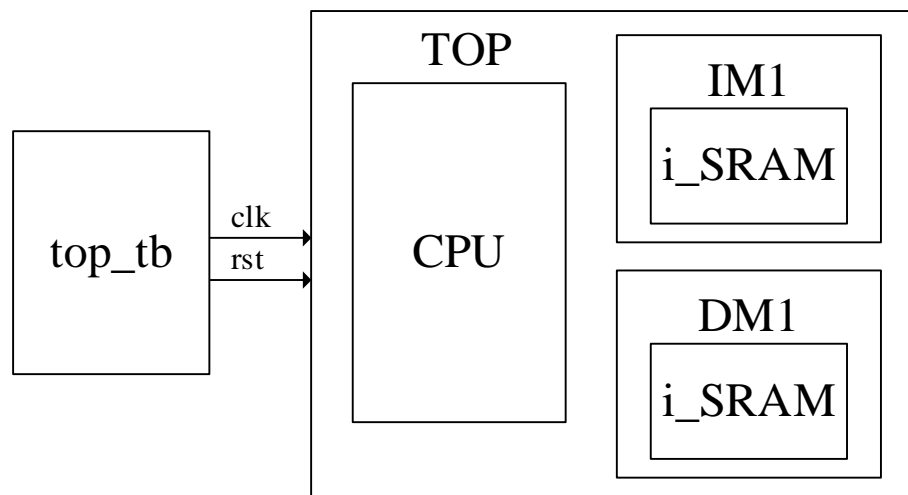
## 1.2 Block Overview



Fig. 1-1: System block diagram

HOMEWORK I



Fig. 1-2: A CPU architecture for reference

## 1.3 Module Specification

Table 1-1: Module naming rule

| Category | Name | | | |
|---|---|---|---|---|
| | **File** | **Module** | **Instance** | **SDF** |
| RTL | top.sv | top | TOP | |
| RTL | SRAM_wrapper.sv | SRAM_wrapper | IM1 | |
| RTL | SRAM_wrapper.sv | SRAM_wrapper | DM1 | |
| RTL | SRAM_rtl.sv | SRAM | i_SRAM | |

Table 1-2: Module signals

| Module | Specifications | | | |
|---|---|---|---|---|
| | **Name** | **Signal** | **Bits** | **Function explanation** |
| top | clk | input | 1 | System clock |
| | rst | input | 1 | System reset (active high) |
| SRAM_wrapper | CK | input | 1 | System clock |
| | CS | input | 1 | Chip select (active high) |
| | OE | input | 1 | Output enable (active high) |
| | WEB | input | 4 | Write enable (active low) |
| | A | input | 14 | Address |
| | DI | input | 32 | Data input |
| | DO | output | 32 | Data output |

HOMEWORK I

| Module | Name | Signal | Bits | Function explanation |
|--------|------|--------|------|----------------------|
| SRAM | Memory Space | | | |
| | Memory_byte0 | logic | 8 | Size: [16384] |
| | Memory_byte1 | logic | 8 | Size: [16384] |
| | Memory_byte2 | logic | 8 | Size: [16384] |
| | Memory_byte3 | logic | 8 | Size: [16384] |

## 1.4  Detailed Description

Fig. 1-1 is a system overview of this problem. You SHOULD NOT modify any port declarations or your design may have error when TA runs the hidden testbench.

Fig. 1-2 is a block diagram of a simplified 5-stage pipeline CPU. Note that this diagram shows only some possible components and signals of a pipeline CPU, and you may need to add others, e.g. a controller and its signals, for your design. You can also develop your own architecture. The only restriction is that your architecture SHOULD have 5 stages of pipeline.

You should implement the instructions in Table 1-3. The detailed instruction types and the immediate formats can be found in Appendix C. You can also study *The RISC-V Instruction Set Manual* posted on the course website.

Table 1-3: Instruction lists

☞ R-type

| 31        25 | 24    20 | 19    15 | 14    12 | 11            7 | 6        0 | Mnemonic | Description |
|--------------|----------|----------|----------|-----------------|------------|----------|-------------|
| funct7 | rs2 | rs1 | funct3 | rd | opcode | | |
| 0000000 | rs2 | rs1 | 000 | rd | 0110011 | ADD | rd = rs1 + rs2 |
| 0100000 | rs2 | rs1 | 000 | rd | 0110011 | SUB | rd = rs1 - rs2 |
| 0000000 | rs2 | rs1 | 001 | rd | 0110011 | SLL | rd = $rs1_u$ << rs2[4:0] |
| 0000000 | rs2 | rs1 | 010 | rd | 0110011 | SLT | rd = ($rs1_s$ < $rs2_s$)? 1:0 |
| 0000000 | rs2 | rs1 | 011 | rd | 0110011 | SLTU | rd = ($rs1_u$ < $rs2_u$)? 1:0 |
| 0000000 | rs2 | rs1 | 100 | rd | 0110011 | XOR | rd = rs1 ^ rs2 |
| 0000000 | rs2 | rs1 | 101 | rd | 0110011 | SRL | rd = $rs1_u$ >> rs2[4:0] |
| 0100000 | rs2 | rs1 | 101 | rd | 0110011 | SRA | rd = $rs1_s$ >> rs2[4:0] |
| 0000000 | rs2 | rs1 | 110 | rd | 0110011 | OR | rd = rs1 \| rs2 |
| 0000000 | rs2 | rs1 | 111 | rd | 0110011 | AND | rd = rs1 & rs2 |

HOMEWORK I

☞ I-type

| 31            20 | 19    15 | 14    12 | 11        7 | 6        0 | | |
|------------------|----------|----------|-------------|------------|----------|-------------|
| imm[11:0] | rs1 | funct3 | rd | opcode | Mnemonic | Description |
| imm[11:0] | rs1 | 010 | rd | 0000011 | LW | rd = M[rs1+imm] |
| imm[11:0] | rs1 | 000 | rd | 0010011 | ADDI | rd = rs1 + imm |
| imm[11:0] | rs1 | 010 | rd | 0010011 | SLTI | rd = (rs1$_s$ < imm$_s$)? 1:0 |
| imm[11:0] | rs1 | 011 | rd | 0010011 | SLTIU | rd = (rs1$_u$ < imm$_u$)? 1:0 |
| imm[11:0] | rs1 | 100 | rd | 0010011 | XORI | rd = rs1 ^ imm |
| imm[11:0] | rs1 | 110 | rd | 0010011 | ORI | rd = rs1 \| imm |
| imm[11:0] | rs1 | 111 | rd | 0010011 | ANDI | rd = rs1 & imm |
| imm[11:0] | rs1 | 000 | rd | 0000011 | LB | rd = M[rs1+imm]$_{bs}$ |
| 0000000    shamt | rs1 | 001 | rd | 0010011 | SLLI | rd = rs1$_u$ << shamt |
| 0000000    shamt | rs1 | 101 | rd | 0010011 | SRLI | rd = rs1$_u$ >> shamt |
| 0100000    shamt | rs1 | 101 | rd | 0010011 | SRAI | rd = rs1$_s$ >> shamt |
| imm[11:0] | rs1 | 000 | rd | 1100111 | JALR | rd = PC + 4 <br> PC = imm + rs1 <br> (Set LSB of PC to 0) |
| imm[11:0] | rs1 | 001 | rd | 0000011 | LH | rd = M[rs1+imm]$_{hs}$ |
| imm[11:0] | rs1 | 101 | rd | 0000011 | LHU | rd = M[rs1+imm]$_{hu}$ |
| imm[11:0] | rs1 | 100 | rd | 0000011 | LBU | rd = M[rs1+imm]$_{bu}$ |

☞ S-type

| 31      25 | 24    20 | 19    15 | 14    12 | 11        7 | 6        0 | | |
|------------|----------|----------|----------|-------------|------------|----------|-------------|
| imm[11:5] | rs2 | rs1 | funct3 | imm[4:0] | opcode | Mnemonic | Description |
| imm[11:5] | rs2 | rs1 | 010 | imm[4:0] | 0100011 | SW | M[rs1+imm] = rs2 |
| imm[11:5] | rs2 | rs1 | 000 | imm[4:0] | 0100011 | SB | M[rs1+imm]$_b$ = rs2$_b$ |
| imm[11:5] | rs2 | rs1 | 001 | imm[4:0] | 0100011 | SH | M[rs1+imm]$_b$ = rs2$_h$ |

☞ B-type

| 31      25 | 24   20 | 19    15 | 14    12 | 11        7 | 6        0 | | |
|------------|---------|----------|----------|-------------|------------|----------|-------------|
| imm[12\|10:5] | rs2 | rs1 | funct3 | imm[4:1\|11] | opcode | Mnemonic | Description |
| imm[12\|10:5] | rs2 | rs1 | 000 | imm[4:1\|11] | 1100011 | BEQ | PC = (rs1 == rs2)? <br> PC + imm: PC + 4 |
| imm[12\|10:5] | rs2 | rs1 | 001 | imm[4:1\|11] | 1100011 | BNE | PC = (rs1 != rs2)? <br> PC + imm: PC + 4 |
| imm[12\|10:5] | rs2 | rs1 | 100 | imm[4:1\|11] | 1100011 | BLT | PC = (rs1$_s$ < rs2$_s$)? <br> PC + imm: PC + 4 |
| imm[12\|10:5] | rs2 | rs1 | 101 | imm[4:1\|11] | 1100011 | BGE | PC = (rs1$_s$ ≥ rs2$_s$)? <br> PC + imm: PC + 4 |

| imm[12\|10:5] | rs2 | rs1 | 110 | imm[4:1\|11] | 1100011 | BLTU | PC = (rs1$_u$ < rs2$_u$)? PC + imm: PC + 4 |
| imm[12\|10:5] | rs2 | rs1 | 111 | imm[4:1\|11] | 1100011 | BGEU | PC = (rs1$_u$ ≥ rs2$_u$)? PC + imm: PC + 4 |

☞ U-type

| 31                    12 | 11        7 | 6        0 | | |
|---|---|---|---|---|
| imm[31:12] | rd | opcode | Mnemonic | Description |
| imm[31:12] | rd | 0010111 | AUIPC | rd = PC + imm |
| imm[31:12] | rd | 0110111 | LUI | rd = imm |

☞ J-type

| 31                    12 | 11        7 | 6        0 | | |
|---|---|---|---|---|
| imm[20\|10:1\|11\|19:12] | rd | opcode | Mnemonic | Description |
| imm[20\|10:1\|11\|19:12] | rd | 1101111 | JAL | rd = PC + 4 PC = PC + imm |

The data size of your design SHOULD BE 32 BITS. You need to implement a register file with 32 registers. There are 31 general-purpose registers x1–x31. Note that the register x0 is hardwire to the constant 0. In addition to the register file, you also need to implement a 32-bit program counter. Every memory address should be four-byte aligned, i.e., the program counter and the load/store address should be multiple of 4. You should implement the mechanism to avoid hazards, e.g. forwarding or hazard detection.

The size of the instruction memory is 16K×4-byte (64KB), and the size of the data memory is 16K×4-byte (64KB). You should use SRAM_wrapper as instruction memory (IM1) and data memory (DM1). You SHOULDN'T modify Verilog code in SRAM_wrapper and SRAM.

Your RTL code needs to comply with Superlint within 85% of your code, i.e., the number of errors & warnings in total shall not exceed 15% of the number of lines in your code. HINT: You can use the command in Appendix B to get the number of lines in *src* and *include* directories.

## 1.5   Verification

You should complete following programs and use the commands in Appendix B to verify your design.

a.   Use *prog0* to perform verification for the functionality of instructions.

HOMEWORK I

b. Write a program defined as *prog1* to perform a sort algorithm. The number of sorting elements is stored at the address named *array_size* in ".rodata" section defined in *data.S*. The first element is stored at the address named *array_addr* in ".rodata" section defined in *data.S*, others are stored at adjacent addresses. The maximum number of elements is 64. All elements are **signed 4-byte integers** and you should sort them in **ascending order**. Rearranged data should be stored at the address named *_test_start* in "_test" section defined in *link.ld*.

c. Write a program defined as *prog2* to perform multiplication. The multiplicand is stored at the address named *mul1* in ".rodata" section defined in *data.S*. The multiplier is stored at the address named *mul2* in ".rodata" section defined in *data.S*. The multiplicand and the multiplier are **signed 4-byte integers**. Their product is **signed 8-byte integers** and should be stored at the address named *_test_start* in "_test" section defined in *link.ld*.

d. Write a program defined as *prog3* to perform greatest common divisor(GCD). The first number is stored at the address named *div1* in ".rodata" section defined in *data.S*. The second data is stored at the address named *div2* in ".rodata" section defined in *data.S*. These two numbers are **unsigned 4-byte integers**. The result should be stored at the address named *_test_start* in "_test" section defined in *link.ld*. The values of the quotient and the remainder should follow C99 specification. "When integers are divided, the result of the **/** operator is the algebraic quotient with any fractional part discarded. If the quotient **a/b** is representable, the expression **(a/b)\*b + a%b** shall equal **a**.

Don't forget to return from *main* function to finish the simulation in each program. Save your assembly code or C code as *main.S* or *main.c* respectively. You should also explain the result of this program in the report. In addition to these verification, **TA will use another program to verify your design.** Please make sure that your design can execute the listed instructions correctly.

## 1.6   Report Requirements

Your report should have the following features:

a. Proper explanation of your design is required for full credits.

b. Block diagrams shall be drawn to depict your designs.

c. Show your snapshots of the waveforms and the simulation results on the terminal for the different test cases in your report and illustrate the correctness of your results.

d. Report the number of lines of your RTL code, the final results of running Superlint and 3~5 most frequent warning/errors in your code. Describe how you modify your code to comply with the Superlint.
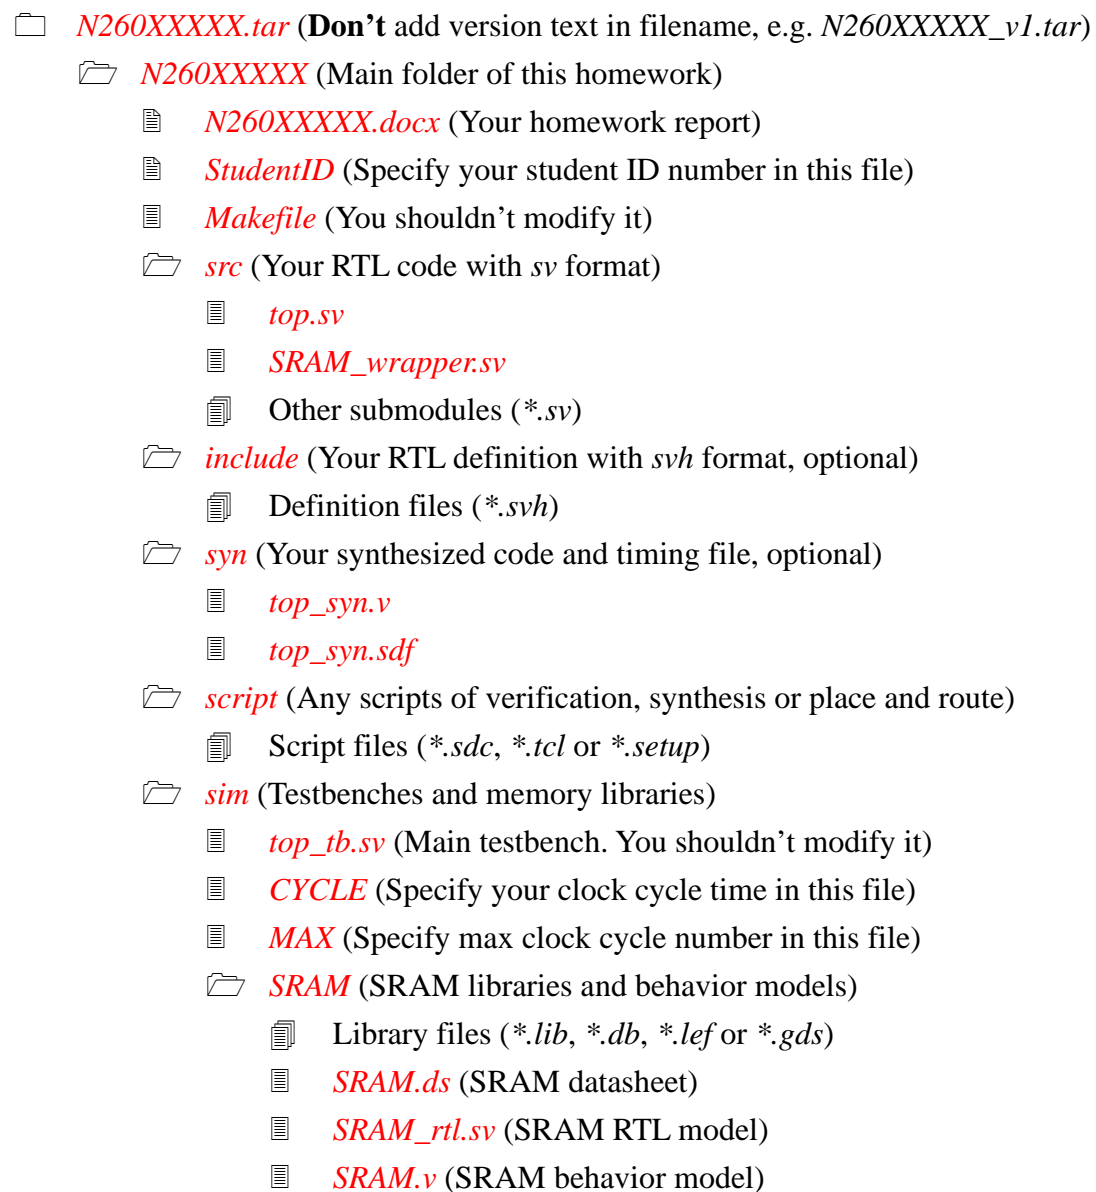
HOMEWORK I

# Appendix

## A. File Hierarchy Requirements

All homework SHOULD be uploaded and follow the file hierarchy and the naming rules, especially letter case, specified below. You should create a main folder named your student ID number. It contains your homework report and other files. The names of the files and the folders are labeled in red color, and the specifications are labeled in black color. Filenames with * suffix in the same folder indicate that you should provide one of them. Before you submit your homework, you can use Makefile macros in Appendix B to check correctness of the file structure.

Fig. A-1 File hierarchy

📁 *N260XXXXX.tar* (**Don't** add version text in filename, e.g. *N260XXXXX_v1.tar*)
- 📂 *N260XXXXX* (Main folder of this homework)
  - 📄 *N260XXXXX.docx* (Your homework report)
  - 📄 *StudentID* (Specify your student ID number in this file)
  - 📄 *Makefile* (You shouldn't modify it)
  - 📂 *src* (Your RTL code with *sv* format)
    - 📄 *top.sv*
    - 📄 *SRAM_wrapper.sv*
    - 📄 Other submodules (*\*.sv*)
  - 📂 *include* (Your RTL definition with *svh* format, optional)
    - 📄 Definition files (*\*.svh*)
  - 📂 *syn* (Your synthesized code and timing file, optional)
    - 📄 *top_syn.v*
    - 📄 *top_syn.sdf*
  - 📂 *script* (Any scripts of verification, synthesis or place and route)
    - 📄 Script files (*\*.sdc*, *\*.tcl* or *\*.setup*)
  - 📂 *sim* (Testbenches and memory libraries)
    - 📄 *top_tb.sv* (Main testbench. You shouldn't modify it)
    - 📄 *CYCLE* (Specify your clock cycle time in this file)
    - 📄 *MAX* (Specify max clock cycle number in this file)
    - 📂 *SRAM* (SRAM libraries and behavior models)
      - 📄 Library files (*\*.lib*, *\*.db*, *\*.lef* or *\*.gds*)
      - 📄 *SRAM.ds* (SRAM datasheet)
      - 📄 *SRAM_rtl.sv* (SRAM RTL model)
      - 📄 *SRAM.v* (SRAM behavior model)

HOMEWORK I

📂 *prog0* (Subfolder for Program 0)

    📄    *Makefile* (Compile and generate memory content)

    📄    *main.S* (Assembly code for verification)

    📄    *setup.S* (Assembly code for testing environment setup)

    📄    *link.ld* (Linker script for testing environment)

    📄    *golden.dat* (Golden hexadecimal data)

📂 *prog1* (Subfolder for Program 1)

    📄    *Makefile* (Compile and generate memory content)

    📄    *main.S* * (Assembly code for verification)

    📄    *main.c* * (C code for verification)

    📄    *data.S* (Assembly code for testing data)

    📄    *setup.S* (Assembly code for testing environment setup)

    📄    *link.ld* (Linker script for testing environment)

    📄    *golden.dat* (Golden hexadecimal data)

📂 *prog2* (Subfolder for Program 2)

    📄    *Makefile* (Compile and generate memory content)

    📄    *main.S* * (Assembly code for verification)

    📄    *main.c* * (C code for verification)

    📄    *data.S* (Assembly code for testing data)

    📄    *setup.S* (Assembly code for testing environment setup)

    📄    *link.ld* (Linker script for testing environment)

    📄    *golden.dat* (Golden hexadecimal data)

📂 *prog3* (Subfolder for Program 3)

    📄    *Makefile* (Compile and generate memory content)

    📄    *main.S* * (Assembly code for verification)

    📄    *main.c* * (C code for verification)

    📄    *data.S* (Assembly code for testing data)

    📄    *setup.S* (Assembly code for testing environment setup)

    📄    *link.ld* (Linker script for testing environment)

    📄    *golden.dat* (Golden hexadecimal data)

HOMEWORK I

# B. Simulation Setting Requirements

You **SHOULD** make sure that your code can be simulated with specified commands in Table B-1. **TA will use the same command to check your design under SoC Lab environment. If your code can't be recompiled by TA successfully, you receive NO credit.**

Table B-1: Simulation commands

| Simulation Level | Command |
|---|---|
| Problem1 | |
| RTL | make rtl_all |
| Post-synthesis (optional) | make syn_all |

TA also provide some useful Makefile macros listed in Table B-2. Braces { } means that you can choose one of items in the braces. X stands for 0,1,2,3…, depend on which verification program is selected.

Table B-2: Makefile macros

| Situation | Command |
|---|---|
| RTL simulation for progX | make rtlX |
| Post-synthesis simulation for progX | make synX |
| Dump waveform (no array) | make {rtlX,synX} FSDB=1 |
| Dump waveform (with array) | make {rtlX,synX} FSDB=2 |
| Open nWave without file pollution | make nWave |
| Open Superlint without file pollution | make superlint |
| Open DesignVision without file pollution | make dv |
| Synthesize your RTL code (You need write *synthesis.tcl* in *script* folder by yourself) | make synthesize |
| Delete built files for simulation, synthesis or verification | make clean |
| Check correctness of your file structure | make check |
| Compress your homework to *tar* format | make tar |

You can use the following command to get the number of lines:

| wc -l src/* include/* |
|---|

# C. RISC-V Instruction Format

## Table C-1: Instruction type

☞ R-type

| 31            25 | 24        20 | 19    15 | 14    12 | 11                7 | 6        0 |
|------------------|--------------|----------|----------|---------------------|------------|
| funct7           | rs2          | rs1      | funct3   | rd                  | opcode     |

☞ I-type

| 31                    20 | 19    15 | 14    12 | 11                7 | 6        0 |
|--------------------------|----------|----------|---------------------|------------|
| imm[31:20]               | rs1      | funct3   | rd                  | opcode     |

☞ S-type

| 31            25 | 24        20 | 19    15 | 14    12 | 11                7 | 6        0 |
|------------------|--------------|----------|----------|---------------------|------------|
| imm[11:5]        | rs2          | rs1      | funct3   | imm[4:0]            | opcode     |

☞ B-type

| 31       | 30        25 | 24        20 | 19    15 | 14    12 | 11        8 | 7        | 6        0 |
|----------|--------------|--------------|----------|----------|-------------|----------|------------|
| imm[12]  | imm[10:5]    | rs2          | rs1      | funct3   | imm[4:1]    | imm[11]  | opcode     |

☞ U-type

| 31                                    12 | 11                7 | 6        0 |
|------------------------------------------|---------------------|------------|
| imm[31:12]                               | rd                  | opcode     |

☞ J-type

| 31       | 30        21 | 20       | 19        12 | 11                7 | 6        0 |
|----------|--------------|----------|--------------|---------------------|------------|
| imm[20]  | imm[10:1]    | imm[11]  | imm[19:12]   | rd                  | opcode     |

## Table C-2: Immediate type

☞ I-immediate

| 31                            11 | 10        5 | 4        1 | 0         |
|----------------------------------|-------------|------------|-----------|
| ─ inst[31] ─                     | inst[30:25] | inst[24:21]| inst[20]  |

☞ S-immediate

| 31                            11 | 10        5 | 4        1 | 0         |
|----------------------------------|-------------|------------|-----------|
| ─ inst[31] ─                     | inst[30:25] | inst[11:8] | inst[7]   |

☞ B-immediate

| 31                        12 | 11       | 10        5 | 4        1 | 0         |
|------------------------------|----------|-------------|------------|-----------|
| ─ inst[31] ─                 | inst[7]  | inst[30:25] | inst[11:8] | 0         |

☞ U-immediate

| 31       | 30        20 | 19        12 | 11                               0 |
|----------|--------------|--------------|------------------------------------|
| Inst[31] | inst[30:20]  | inst[19:12]  | ─ 0 ─                              |

☞ J-immediate

| 31                20 | 19        12 | 11 | 10         5 | 4        1 | 0 |
|---|---|---|---|---|---|
| ― inst[31] ― | inst[19:12] | inst[20] | inst[30:25] | inst[24:21] | 0 |

"― X ―" indicates that all the bits in this range is filled with X.