

WP-6001A/B

HOT WATER PUMPS
MAX. FLOW: 10 M3/h

FT-6001A/B

FLOW METER

TYPE: TURBINE METER
CAPACITY: 1x100%
FLOWRATE MAX: 4000 Sm3/h
DESIGN PRESSURE/TEMPERATURE: 18 Barg/(1-10/65°C)
OPERATING PRESSURE/TEMPERATURE: 7 Barg/(4-38°C)

F-6002A/B

DRY GAS FILTER


CAPACITY: 1x100%
FLOWRATE MAX: 4000 Sm3/h
DESIGN PRESSURE/TEMPERATURE: 18 Barg/(1-10/65°C)
OPERATING PRESSURE/TEMPERATURE: 7 Barg/(4-38°C)

FT-6001AA/BB

FLOW METER

TYPE: TURBINE METER
CAPACITY: 2x50%
FLOWRATE MAX: 8500 Sm3/h
DESIGN PRESSURE/TEMPERATURE: 50 Barg/(1-10/65°C)
OPERATING PRESSURE/TEMPERATURE: 22.5 Barg/(4-38°C)

FRESH WATER FILL BY HAND PUMP

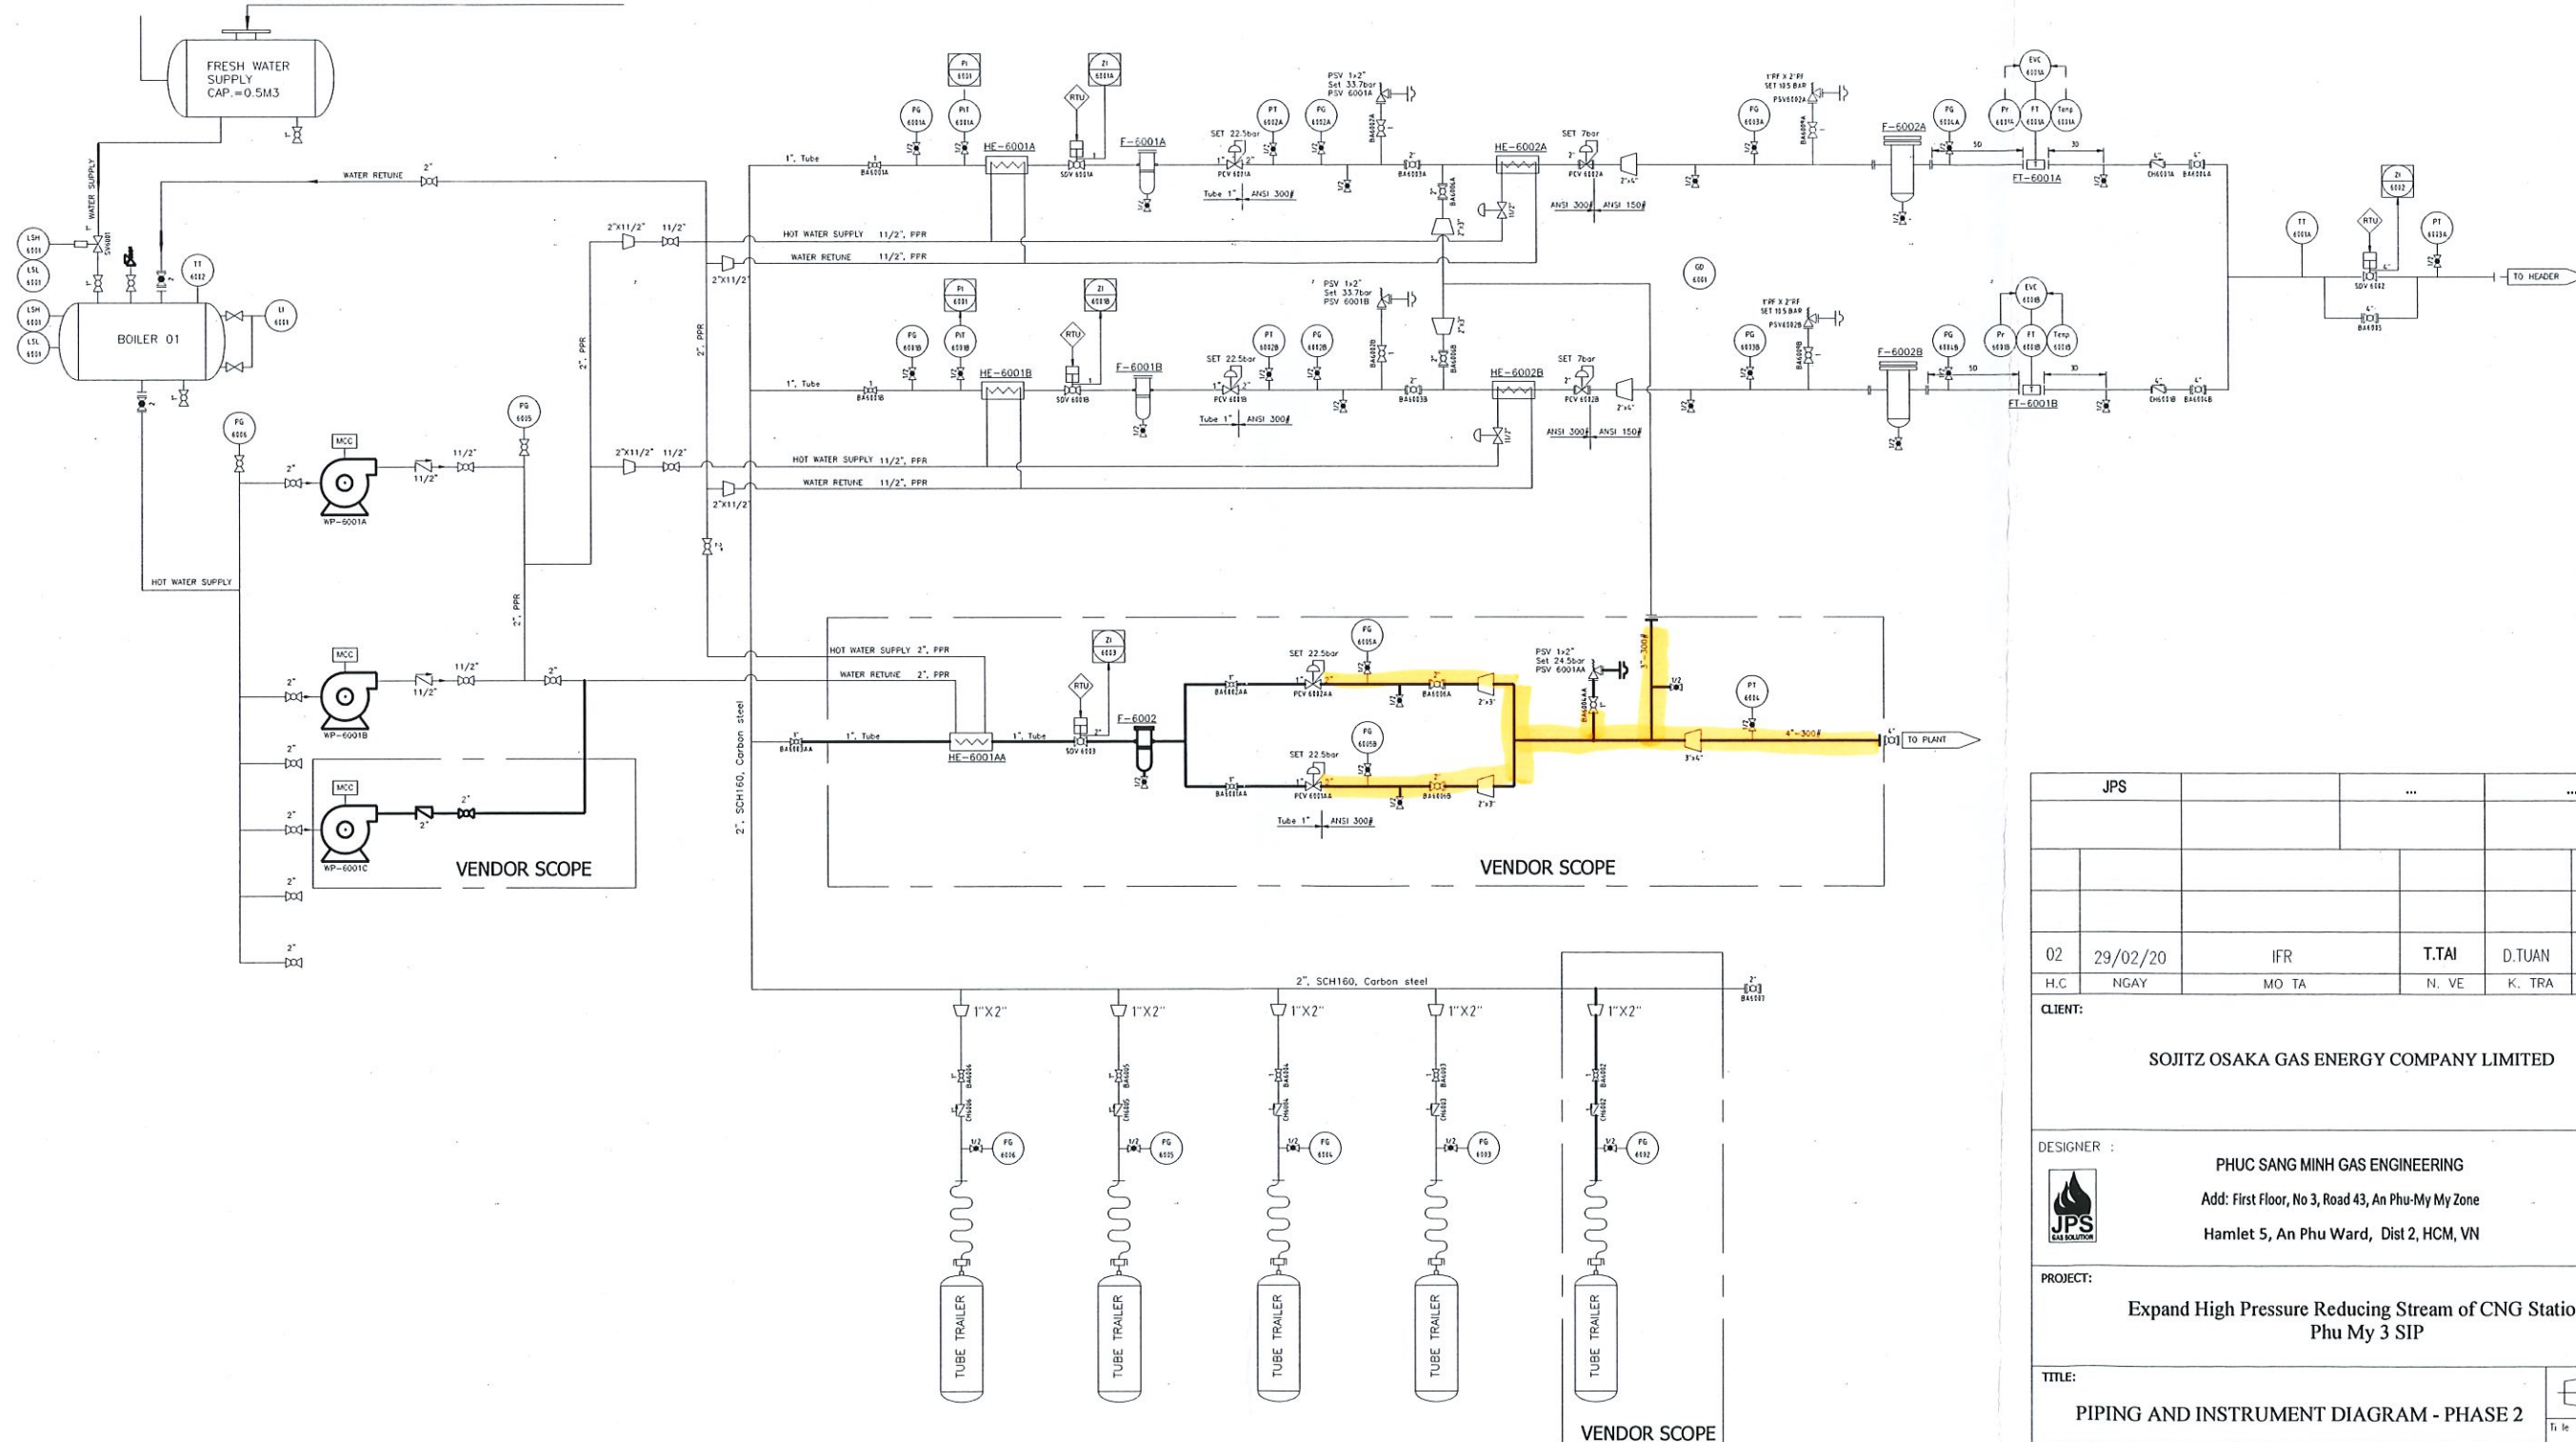

JPS		
02		29/02/20		IFR	
H.C		NGAY		MO TA	
CLIENT:		SOJITZ OSAKA GAS ENERGY COMPANY LIMITED		T.TAI	
DESIGNER :		PHUC SANG MINH GAS ENGINEERING		D.TUAN	
		Add: First Floor, No 3, Road 43, An Phu-Mỹ My Zone		N. VE	
		Hamlet 5, An Phu Ward, Dist 2, HCM, VN		K. TRA	
PROJECT:		Expand High Pressure Reducing Stream of CNG Station in		P. DUYET	
		Phu My 3 SIP			
TITLE:		PIPING AND INSTRUMENT DIAGRAM - PHASE 2		Số hiệu chỉnh	
JPS DWG CODE:		PRU4K-02-PID-06-01		khô gáy	
				Tong so trong	
				Trong kung (kg)	
				Số trang	
				01	