

Design and Development of a Hydrodynamic Tunnel for Experimental Fluid Dynamics

210214X	HMDA Herath
210448R	PMJ Pathiraja
210684K	WMDC Weerakoon

Advised by:

Dr. Indrajith D Nissanka
Department of Mechanical Engineering,
University of Moratuwa

Dr. Nalaka Samaraweera
Department of Mechanical Engineering,
University of Moratuwa

Mr. Lakshitha de Silva
Department of Mechanical Engineering,
University of Moratuwa

Report submitted in partial fulfilment of the requirements for
the degree of Bachelor of Science in Engineering

Department of Mechanical Engineering.
University of Moratuwa.
Sri Lanka.

Declaration

We declare that this is our own work and this report does not incorporate without acknowledgement any material previously submitted for a Degree or Diploma in any other University or institute of higher learning and to the best of our knowledge and belief it does not contain any material previously published or written by another person except where the acknowledgement is made in the text.

Also, we hereby grant to University of Moratuwa the non-exclusive right to reproduce and distribute our report, in whole or in part in print, electronic or other medium.

210214X	HMDA Herath	22/06/2026	
210448R	PMJ Pathiraja	22/06/2026	
210684K	WMDC Weerakoon	22/06/2026	

The above candidates have carried out the research included in this research under my supervision.

Dr. Indrajith D Nissanka	22/06/2026	
Dr. Nalaka Samaraweera	22/06/2026	
Mr. Lakshitha de Silva	22/06/2026	

Abstract

The application of hydrodynamic tunnels covers several important areas such as marine engineering, hydrofoil testing, high Reynolds number testing and CFD model validation. In this work, design and development of a small/medium-scale, vertical closed loop hydrodynamic tunnel with an open channel test section is presented to generate steady, uniform, low turbulence flow for external flow experiments. The first experimental goal is to create and capture a range of flow regimes around a cylinder body, from laminar steady flow to transitional unsteady flow, spanning Reynolds number values from 0 to ~8,000 (based on the cylinder diameter as the characteristic length).

The design process started from the literature research and configuration selection of the system, then all main parts, such as the contraction section, wide-angle diffuser, vertical diffusers, settling chamber, honeycomb structure, and 90° bends were calculated by using analytical methods. A head loss model was developed in the MATLAB software and it was shown that the total head loss is acceptable (approximately 0.9 m) and that head loss cannot be used as an optimization criterion. Thus, a single phase ANSYS Fluent CFD simulation has been performed to optimize the components. Through the CFD analysis of the wide angle diffuser, some flow separation and turbulence were identified and addressed by the addition of internal guide vanes, which reduced the effective diffusion angle to 7° per diffuser channel. Finite Element Analysis (FEA) of the glass fiber components determined that wall thickness was not the only factor that could resist internal water column pressure and ribs and reinforcements were added to all fabricated components.

Glass fiber was designed for all primary structural components such as two vertical diffusers, two 90° bends, the wide-angle diffuser with integrated vanes, the settling chamber, the contraction section, the test section and the honeycomb structure. The test section was instrumented with hydrogen bubble flow visualization to be able to qualitatively observe flow patterns during experimental runs.

Keywords: hydrodynamic tunnel, flow conditioning, CFD result validation, glass fiber fabrication, Reynolds number

Acknowledgements

We would like to express our gratitude to many people for their guidance, support and encouragement that facilitated successful completion of this project.

We would like to thank Dr. Indrajith D. Nissanka, our main supervisor and project advisor for the technical guidance, constructive feedbacks and continuous support given throughout this project. His wisdom and commitment were very important to the course of and quality of this work.

Finally, we would like to express our sincere appreciation to Dr. Nalaka Samaraweera for his great support in the analytical phase of the project and especially in sourcing components and materials which are crucial to the development of this work. His hands-on experience and dedication were a valuable asset at every stage.

Special thanks goes to Mr. Lakshitha de Silva who had been with us at each step, from initial design stages to the manufacturing of this project, with his hands-on support and presence. He was always there with us when we needed him, and he was always there to lead us.

We sincerely appreciate the organization, timeous communication and structured format Dr. Dumith Jayathilaka provided while conducting the module of final year project, keeping us on track and well informed at every stage of the module.

We would also like to express our appreciation to all academic and non-academic staff members of the Department of Mechanical Engineering, University of Moratuwa who contributed to us in various ways and to our fellow students and friends whose encouragement, advice and camaraderie enhanced this journey.

Last but not least and most importantly we are hugely thankful to our families and parents for their consistent support, encouragement and financial contributions in this pursuit. Their trust, their patience and their sacrifices helped us stay focused and committed through all our challenges.

To all those who contributed in any way or manner to its success from the first day of this project - thank you.

Table of Contents

1	Chapter 1 - Introduction	1
1.1	Background and Motivation	1
1.2	Problem Statement.....	3
1.3	Aim and Objectives	3
1.4	Scope and Limitations	4
1.5	Report Structure.....	4
2	Chapter 2 - Literature Review	5
2.1	Overview of Hydrodynamic Tunnels and Their Applications.....	5
2.2	Tunnel Configurations - Comparative Analysis	6
2.2.1	Horizontal vs. Vertical Arrangements.....	6
2.2.2	Open-Circuit vs. Closed-Circuit Designs	6
2.2.3	Open-Channel vs. Closed-Channel Test Sections	7
2.3	Key Design Parameters and Their Influence on Flow Quality.....	9
2.4	Test Section Design and Reynolds Number Considerations	11
2.5	Contraction Section Design	12
2.5.1	Contraction Ratio and Velocity Uniformity.....	12
2.5.2	Contraction Curve Geometries (Bell-Mehta, Fifth-Degree Polynomial)	13
2.6	Diffuser Design.....	13
2.6.1	Conventional Diffusers	14
2.6.2	Wide-Angle Diffusers with Screens and Vanes	15
2.7	Flow Conditioning - Honeycomb Structures and Screens.....	16
2.8	Head Loss Analysis Methods	16
2.9	Structural Considerations for Tunnel Fabrication	17
2.10	Summary and Justification of Selected Design Direction	18
3	Chapter 3 - Methodology.....	20
3.1	Summary of Methodology.....	20

3.2	Initial Design and Analytical Calculations	20
3.2.1	Configuration Selection Approach	21
3.2.2	Component Design and Sizing	22
3.2.3	Head Loss Analysis	37
3.2.4	Flow Visualization Implementation.....	42
4	Chapter 4 – Simulation, Optimization and detailed design	44
4.1	CFD Analysis Approach	44
4.1.1	Simulation Objectives and Scope	44
4.1.2	Computational Fluid Dynamics (CFD) Methodology - Governing Equations and Turbulence Modelling.....	45
4.1.3	Computational Domain, Boundary Conditions and Solver Settings	47
4.1.4	Mesh Generation and Quality Assessment	50
4.2	Structural Analysis (FEA) Approach.....	52
4.2.1	Overview of Structural Analysis Methodology	52
4.2.2	Material Properties and Assumptions.....	52
4.2.3	Component Geometries and Element Type	53
4.2.4	Boundary Conditions and Loading.....	55
4.2.5	Analysis Procedure and Acceptance Criteria.....	56
4.3	Finalized Component Dimensions and Design Parameters.....	57
4.3.1	Vertical Transition section	58
4.3.2	Rectangular Bend	59
4.3.3	Wide Angle Diffuser.....	60
4.3.4	Honeycomb section	61
4.3.5	Settling chamber.....	62
4.3.6	Contraction section.....	63
4.3.7	Test Section.....	64
5	Chapter 5 - Results and Discussion	65

5.1	Analytical Calculation Results	65
5.1.1	Component Design Summary.....	65
5.1.2	Contraction Design Verification	66
5.1.3	Interconnecting Pipeline Selection	67
5.1.4	Head Loss Analysis Results.....	68
5.1.5	Pump Adequacy Verification	70
5.2	Simulation Results - CFD.....	71
5.2.1	Wide-Angle Diffuser - Baseline Simulation.....	71
5.2.2	Turbulence Intensity Decay Analysis	73
5.2.3	Design Modifications Arising from CFD	75
5.3	Simulation results - FEA	77
5.3.1	Contraction Section – baseline FEA results analysis	78
5.3.2	Wide-Angle Diffuser - baseline FEA results analysis	79
5.3.3	Settling Chamber - baseline FEA results analysis	80
5.3.4	Summary of Baseline FEA Results	80
5.4	Fabrication.....	81
5.4.1	Material Selection - Evaluation of Options & Justification of Glass Fiber.....	81
5.4.2	Fabrication Method and Process Overview.....	82
5.4.3	Glass Fiber Fabricated Components.....	85
5.4.4	Dimensional Verification and Quality Assessment	88
6	Chapter 6 - Conclusions and Recommendations.....	90
6.1	Summary of Work Completed Against Objectives.....	90
6.2	Key Findings and Contributions.....	94
6.3	Limitations and Self-Critical Evaluation.....	97
6.4	Recommendations for Future Work.....	98
7	References	99
8	Appendices	103

8.1	Appendix 1 – technical drawings	103
8.2	Appendix 2- Head loss calculation model	112

List of figures

Figure 1.1: flow pattern progression over circular cylinder	1
Figure 1.2: Small to medium scale water tunnel Source: Low Speed Water Tunnel – Experimental Flow Physics Lab	2
Figure 2.1: Different types of HDT configurations	8
Figure 2.2: Components in selected tunnel configuration	9
Figure 2.3: Test section shape alternatives. From left to right: square with fillets, square with diminishing fillets, and square.....	11
Figure 2.4: Bell-Mehta fifth-degree polynomial contraction contour	13
Figure 2.5: Conventional diffuser geometry showing half-angle of divergence Source: ANSYS Flow simulation results	14
Figure 2.6: Internal guide vanes within a wide-angle diffuser	15
Figure 3.1: 2D cylinder flow at different Re numbers	25
Figure 3.2: Boundary layer growth graph of open channel test section using MATLAB ...	27
Figure 3.3: Fig. 1 Isoreduction contours as a function of pressure-drop coefficient and ratio of integral scale of initial turbulence to cell length, Fig. 2 Pressure-drop coefficient and length Reynolds number as a function of diameter Reynolds number and length-to-diameter ratio. Flow is fully developed above and to the right of the dashed line.....	28
Figure 3.4: Variation of pressure-drop coefficient and length Reynolds number as a function of diameter Reynolds number and length-to-diameter ratio, indicating fully developed flow region above and to the right of the dashed line. The pressure loss across the honeycomb [8]	29
Figure 3.5 : Isoreduction contours showing the relationship between pressure-drop coefficient and the ratio of the integral length scale of initial turbulence to the cell length [8]	31
Figure 3.6: Bell-Mehta fifth-degree polynomial wall profile for the contraction section Source: Y. Joang et al., 2018 [18]	34
Figure 3.7: Pump characteristic curve	38
Figure 3.8: Flowchart of the MATLAB head loss model	41

Figure 3.9: A representative schematic of the experimental setup employing the hydrogen bubble flow visualization system. The cylinder/wire and the platinum wire holder.....	43
Figure 4.1 - Fluid domain.....	49
Figure 4.2 - Boundary condition setup.....	49
Figure 4.3 - Mesh.....	50
Figure 4.4 – Skewness.....	51
Figure 4.5 - Orthogonal quality.....	51
Figure 4.6 - Near wall treatment.....	52
Figure 4.7: Abaqus mesh - settling chamber.....	54
Figure 4.8: Abaqus mesh - wide angle diffuser.....	54
Figure 4.9: Abaqus mesh - contraction section.....	54
Figure 4.10: fiber components reinforced with ribs.....	56
Figure 4.11: Boundary conditions - settling chamber (other components are also like this)	56
Figure 4.12: Complete CAD model of the Hydrodynamic tunnel.....	57
Figure 4.13: vertical transition section.....	58
Figure 4.14: Rectangular 90-degree bend.....	59
Figure 4.15: Wide angle diffuser.....	60
Figure 4.16: Honeycomb structure.....	61
Figure 4.17: Settling chamber.....	62
Figure 4.18: Contraction section detailed design.....	63
Figure 4.19: Test section detailed drawing.....	64
Figure 5.1: Bell-Mehta contraction wall profile plot from MATLAB.....	67
Figure 5.2: Bar chart of component head loss contributions from MATLAB output.....	69
Figure 5.3: SOLEX SX318/3T pump performance characteristic curve.....	70
Figure 5.4: 0.25 S - Early transient stage (Attached flow).....	71
Figure 5.5: 1.5 S – Separation forming.....	71
Figure 5.6: 2.2 S - Developed separation.....	71
Figure 5.7: Timestep 19.6 S– Quasi steady flow.....	71
Figure 5.8: Timestep 25 - Uniform Pressure Recovery.....	72
Figure 5.9: Timestep 150 -Early pressure disturbance.....	72
Figure 5.10: Timestep 220 - Symmetric Low-Pressure Regions.....	72
Figure 5.11: Timestep 1960 - Nearly stable pressure distribution.....	72
Figure 5.12 - Turbulence intensity variation from diffuser inlet.....	74

Figure 5.13 - 90 bend Velocity streamlines	74
Figure 5.14 - Turbulence intensity decay through the wide-angle diffuser.....	75
Figure 5.15 - Splitter vane design.....	76
Figure 5.16: Glass fiber sheets fabrication	82
Figure 5.17 - CNC machined glass fiber sheet parts	82
Figure 5.18: reinforced fiber components	83
Figure 5.19: fabricated glass test section.....	83
Figure 5.20: 3D printed using CREALITY K1C printer with 0.4mm nozzle	84
Figure 5.21: 3D printed sample	84
Figure 5.22: laser cut box bar parts	84
Figure 5.23: drawings prepared for welding	84
Figure 5.24: fabricated 2 metal structures	85
Figure 5.25 - Thin sheet metal molds for vertical diffuser sections	86
Figure 5.26 - Vertical transition sections manufacturing.....	86
Figure 5.27 - Plywood templates for part alignment during assembly.....	86
Figure 5.28 - Fabricated 90 bends	86
Figure 5.29 - Wide angle diffuser fabrication.....	87
Figure 5.30 - Dimension verification using Plywood templates	87
Figure 5.31- Plywood templates used to maintain curved contraction profile during assembly	88
Figure 5.32 - Contraction section	88
Figure 6.1: First assembly of tunnel components prior to pump and pipeline installation .	92
Figure 6.2: Fully assembled hydrodynamic tunnel prior to testing.....	93
Figure 6.3: Tunnel during initial testing phase.....	93
Figure 6.4: Dye injection flow visualization showing coherent dye streak in test section..	97
Figure 6.5: Dye separation around cylindrical test model observed during flow visualization	97

List of tables

Table 2-1: Comparison of hydrodynamic tunnel configuration options.....	8
Table 2-2: Summary of selected design decisions and justifications	19
Table 3-1: Evaluation of tunnel configurations against project constraints	21
Table 3-2: Reynolds number feasibility check for candidate test section sizes.....	22

Table 3-3: Wide angle diffuser -Design parameters	23
Table 3-4: Design Parameters.....	24
Table 3-5: Finalized contraction section design parameters.....	36
Table 3-6: Head loss evaluation for candidate pipe diameters	37
Table 3-7: Selected pipeline specifications	37
Table 3-8: Loss coefficients for tunnel circuit components.....	39
Table 4-1: GFRP material properties used in Abaqus FEA (MTS unit system).....	53
Table 4-2: Element types assigned to each component in Abaqus	53
Table 4-3: vertical transition section Detailed design parameters	58
Table 4-4: 90 degree bend Detailed design parameters	59
Table 4-5: wide angle diffuser Detailed design parameters.....	60
Table 4-6: Honeycomb structure detailed design parameters.....	61
Table 4-7: settling chamber Detailed design parameters	62
Table 4-8: Contraction section Detailed design parameters	63
Table 4-9: Test section Detailed design parameters	64
Table 5-1: Finalized design parameters for all tunnel components	65
Table 5-2: Mean flow velocity at each tunnel cross-section	66
Table 5-3: component wise head loss calculated values.....	69
Table 5-4 - Waitman, Reneau and Kline Recommendations	77
Table 5-5 - Splitter vane parameters.....	77
Table 5-6: Summary of baseline FEA results for all three components	80
Table 5-7: Material selection criteria.....	81
Table 5-8: Actual dimensional accuracy of each method	89

List of Abbreviations

HDT	Hydrodynamic tunnel
WAD	Wide angle diffuser
AR	Area Ratio
BC	Boundary Condition
CAD	Computer-Aided Design
CFD	Computational Fluid Dynamics
CNC	Computer Numerical Control
Cp	Pressure Recovery Coefficient
DC	Direct Current
DNS	Direct Numerical Simulation
FEA	Finite Element Analysis
FoS	Factor of Safety

GFRP	Glass Fibre Reinforced Polymer
GSM	Grams per Square Metre
HDT	Hydrodynamic Tunnel
IEEE	Institute of Electrical and Electronics Engineers
L/D	Length-to-Diameter Ratio
L/W	Length-to-Width Ratio
LCC	Large Cavitation Channel
LDV	Laser Doppler Velocimetry
LED	Light-Emitting Diode
LES	Large Eddy Simulation
MATLAB	Matrix Laboratory
MTS	Millimetre-Tonne-Second (unit system)
NASA	National Aeronautics and Space Administration
PIV	Particle Image Velocimetry
PISO	Pressure-Implicit with Splitting of Operators
RANS	Reynolds-Averaged Navier-Stokes
Re	Reynolds Number
SST	Shear Stress Transport
uPVC	Unplasticized Polyvinyl Chloride
UGA	University of Georgia
WAD	Wide-Angle Diffuser

1 Chapter 1 - Introduction

1.1 Background and Motivation

Experimental fluid dynamics also has a crucial role for the development of improved knowledge on the behaviour of fluid flow and has the ability to provide empirical data that cannot be fully captured by theoretical models and numerical simulations. Hydrodynamic tunnels (HDT) are one of the facilities that are being used for this purpose. These tunnels can be used to simulate fluid flow around immersed and submerged bodies in a controlled test facility with repeatable, well-defined conditions by circulating water through them. They are used in many engineering fields, such as marine ship design, underwater vehicle hydrodynamics, propeller and hydrofoil performance testing, cavitation and boundary layer behavior characterization. In addition to their direct experimental usefulness, HDTs are valuable for model validation with Computational Fluid Dynamics (CFD) models, which can be used to test and validate a numerical model in order to improve it.

One of the best properties of water as a working fluid is that its density is quite large when compared to air, and its kinematic viscosity is relatively small, which means that the Reynolds numbers of interest can be attained by operating at much lower flow velocities than would be possible in a wind tunnel. This makes the study of external flow phenomena-vortex shedding, flow separation, and boundary layer transition-at lab scale and without the need for large infrastructures and high power drive systems-particularly suited to the study of this with HDTs.

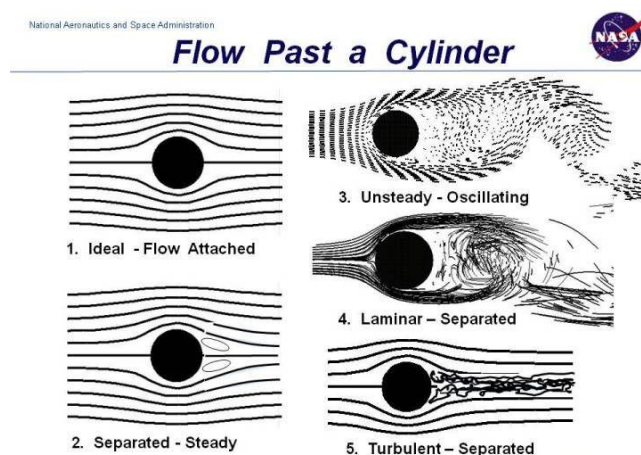


Figure 1.1: flow pattern progression over circular cylinder

Source: [Drag of a Sphere | Glenn Research Center | NASA](#)

A HDT can simulate the entire flow regime behavior of a canonical experiment like flow over a circular cylinder: laminated steady flow at very low Reynolds number, formation of a steady vortex pair, the appearance of laminar vortex street and the transition to unsteady flow in the transitional regime, within a compact and manageable facility.

Although these facilities have a clear research and education value, there is limited access to purpose-built facilities for hydrodynamic testing in Sri Lanka. It is also found that there is no facility available at the institutions to perform the experiments in fluid mechanics in a controlled manner where such experiments are required for the research work or training purpose for most of the academic and industrial applications, leading to heavy reliance on testing in overseas and the costliness as well as impracticality of such testing. This is especially noticeable due to the rising importance of CFD based design in local engineering industries, and the need for experimental validation, which is still unmet in many cases.



Figure 1.2: Small to medium scale water tunnel
 Source: [*Low Speed Water Tunnel – Experimental Flow Physics Lab*](#)

The aim of this project is to overcome this need by designing and developing a practical and affordable hydrodynamic tunnel that can be used in a university laboratory. The project will use materials that are readily available in the local area, a pump that was already purchased by the department, and fabrication techniques that are easily available in the university facilities, in order to create a tunnel that can generate a steady, uniform, low-turbulence flow within the test section over a range of Reynolds numbers enough to demonstrate the principal flow regimes around a cylindrical body. As a result, it aims to develop a viable design methodology which can be replicated for future academic research and undergraduate education in experimental fluid dynamics at the University of Moratuwa and elsewhere.

1.2 Problem Statement

There is no facility in Sri Lanka in industry or any academic institution to establish HDT as it is a well established tools in the world wide research areas of fluid dynamics. This is the reason that it is not possible to carry out controlled experiments on hydrodynamic flow locally and instead any such experiments must be conducted elsewhere, a cost which is prohibitive and logistically impractical for most academic or engineering applications in the Sri Lankan context.

In addition to the lack of physical facilities, there is also a lack of technical literature available. There are many research papers out there describing the design of particular HDT, but there is no systematic and easy to follow design framework summarizing the entire design process, from configuration selection, sizing components, optimization, structural analysis, and fabrication that can be applied to small/medium scale facilities. This disintegration of knowledge poses a big challenge to institutions that want to design and construct a tunnel from scratch within real-world limitations such as budget, space and the materials and methods accessible to them.

This project tackles both gaps: the design and assembly of Sri Lanka's first HDT under university laboratory constraints and the creation of a design framework which captures the entire design process in sufficient detail to allow other institutions to replicate its development and repurpose it for their own purposes.

1.3 Aim and Objectives

Aim

To design and develop a hydrodynamic tunnel with standard testing flow conditions in the test section and effective flow visualization methods for experimental fluid dynamics.

Objectives

1. Identification of the existing relationships between the design characteristics of the hydrodynamic tunnels and the flow conditions within its test section.
2. Design of the hydrodynamic tunnel based on the analysis of design characteristics.
3. Optimization of the hydrodynamic tunnel design to enhance the performance and ensure the standard flow conditions.

4. Development of the hydrodynamic tunnel to achieve standard flow conditions in the test section and validation.

1.4 Scope and Limitations

It is a small/medium scale, vertical, closed loop HDT designed, optimized and fabricated to be used in the Department of Mechanical Engineering at the University of Moratuwa, with an open-channel test section. The range of work is literature based configuration selection, analytical calculations, modelling using MATLAB for all major components, modelling of hydrogen bubble flow visualization, fabrication of glass fiber for all major components, and the development of a consolidated design framework for small/medium-scale hydrodynamic tunnels.

The project is constrained by a number of specific constraints. Having flow control mechanisms that will be able to control different flow velocities was found to be beyond the scope of one academic year for a three-member team and was therefore not possible. This is a closed loop system and to achieve this variable speed operation through a simple valve was not practical as there would be no where for excess flow to go, add back pressure to the test section and standard valves are not available for the pump outlet diameter of 75 mm, and amongst the various options introduced it was decided that a Variable Frequency Drive (VFD) on the pump motor would be the most suitable method but not within the cost and time limitation constraints of the project. Although multiphase simulation of the open-channel test section was identified as desirable for the open channel test section, it has not been performed because of the lack of computational resources in the department. The materials and techniques used in the fabrication are limited to what is available and accessible in Sri Lanka with a total material cost of around LKR 200,000.

1.5 Report Structure

There are six chapters in this report. In Chapter 1, background and motivation of the project, statement of the problem, and aim, objectives, scope and limitations of the project are included. Chapter 2 summarizes previous tunnel designs and the theory behind each key component of the tunnels (tunnel configurations, test section and Reynolds number considerations, contraction section, diffuser, flow conditioning and/or head loss, and structural considerations) and provides justification for the chosen design direction for the tunnel. The methodology, including configuration selection approach, analytical design and sizing of all components, head loss analysis and flow visualization implementation, are given

in Chapter 3. The simulation, optimization and detailed design work are outlined in Chapter 4, which contains the CFD analysis approach, the structural (FEA) analysis approach, and the finalized dimensions and CAD design parameters for the components. The results are then presented and discussed in Chapter 5; this includes the analytical calculation results, the CFD and FEA simulation results, the fabrication process and fabricated parts, analysis of the quality of the tunnel flow, and flow visualization. Chapter 6 summarizes the results and contributions of the work performed and the key points discussed and analyzed in the chapter based on the objectives, critically examines the limitations, and recommends further study.

2 Chapter 2 - Literature Review

2.1 Overview of Hydrodynamic Tunnels and Their Applications

A hydrodynamic tunnel is a facility for the recirculation of water or once-through in which water is driven at controlled velocities through a test section and the behavior of the flow around submerged or immersed bodies is studied under repeatable laboratory conditions. In principle, the facility is equivalent to a wind tunnel, except that water is used as the working fluid. The advantages of hydrodynamic tunnels are that the same Reynolds number can be obtained at a much lower flow velocity as compared to air, due to the higher density and lower kinematic viscosity of water as compared to air, making them very applicable to experimental work on a laboratory scale without the need for large drive systems or extensive infrastructure [2].

Hydrodynamic tunnels are used in many applications in engineering. A marine engineer or naval architect would use them to analyze the drag, lift and pressure distribution over a hull type, rudder and appendages. Pressure-controlled tunnel facilities are often used to investigate propeller performance, cavitation onset and size, etc. [7]. Tunnels are used in the field of underwater vehicle development to simulate the flow conditions around the underwater vehicle and to measure the forces and moments acting on the vehicle. Applications of these in environmental and civil engineering include the study of flow around bridge piers, offshore structures and tidal energy devices [15].

As well as direct experimental measurements, hydrodynamic tunnels are also very important to validate CFD models. Experimental benchmarks to compare predictions of numerical

simulations of complex flow phenomena like vortex shedding, separation of boundary layers and turbulent wakes are required. This is the standard that is established through the use of hydrodynamic tunnels which can produce repeatable and well characterized flow conditions for direct comparison with simulations [8].

Small- and medium-scale hydrodynamic tunnels can be used as good demonstration devices at the education level, in which students can see the basic flow phenomena, like the laminar to turbulent transition, the formation of the von Kármán vortex street behind the cylinder and the effects of flow separation due to streamlining which are otherwise only accessible from abstract numerical or theoretical treatment [15], [16].

2.2 Tunnel Configurations - Comparative Analysis

When designing a hydrodynamic tunnel, there are a number of basic configuration choices that will greatly influence the flow quality, the Reynolds number that can be achieved, the difficulty involved in manufacture, the space size needed to construct, and the cost. The three main choices are: the orientation of the tunnels, the nature of the circuit and the layout of the test section.

2.2.1 Horizontal vs. Vertical Arrangements

The most frequently quoted horizontal configuration in the literature is probably the most prevalent because it provides easy access to the test section, easy mounting of instrumentation and fewer structural problems. They, however, need a lot of floor area, which is a problem in most university laboratory facilities [6].

Vertical tunnels allow components to be stacked in a vertical direction which significantly minimizes horizontal space requirements. Another benefit is that vertical design allows for easy air removal from the circuit, enhancing its flow quality. The major disadvantages are that the models are more complex to design, have limited access to the components, and pose a challenge in controlling free-surface dynamics within the open-channel test sections. The Chalmers University HiCAT tunnel is a successful example of a vertical closed-loop design with a high velocity of up to 13 m/s, with a relatively small area of the laboratory [2].

2.2.2 Open-Circuit vs. Closed-Circuit Designs

In an open-circuit tunnel, water is drawn from a reservoir, passed through the test section once, and discharged. While simple to construct, this arrangement is wasteful of water,

difficult to maintain at stable temperatures, and cannot sustain the consistent flow conditions required for precision experiments [4].

Closed-circuit designs recirculate the same body of water continuously, enabling stable, repeatable flow conditions with precise control over velocity and temperature. The enclosed nature of the circuit also reduces susceptibility to external contamination. These advantages make closed-circuit configurations the standard choice for research-grade facilities, despite their greater fabrication complexity [2], [8].

2.2.3 Open-Channel vs. Closed-Channel Test Sections

The closed channel test section completely encloses the flow, allowing higher velocities and independent pressure control in the test section, critical for cavitation. It requires, however, heavy duty construction and more complicated sealing mechanisms [2].

An open channel test section includes a free water surface, making construction much simpler because there is no pressure sealing required. It also allows for direct access for probe insertion and aids in flow visualization techniques. The restriction is that to make free-surface waves it is necessary to have a maximum velocity, and the open channel design is a practical and economical solution [4], [5].

The hydrodynamic tunnel test sections are generally divided into three groups based on channel type (open or closed), speed range, and cross sectional shape (rectangular or circular). Closed-channel type test sections are mainly used for large and medium-scale, high-speed facilities, allowing for independent pressure control and higher flow velocities. Small-scale low speed tunnels, however, are often configured with rectangular open channel test sections as they can be constructed without requiring pressure tightness, allow direct probe access, have low fabrication cost and provide good optical access for imaging the flow [4], [5].

The classification of hydrodynamic tunnels is illustrated in Figure 2.1, which presents a hierarchical breakdown of closed-loop water tunnel systems based on scale and channel configuration.

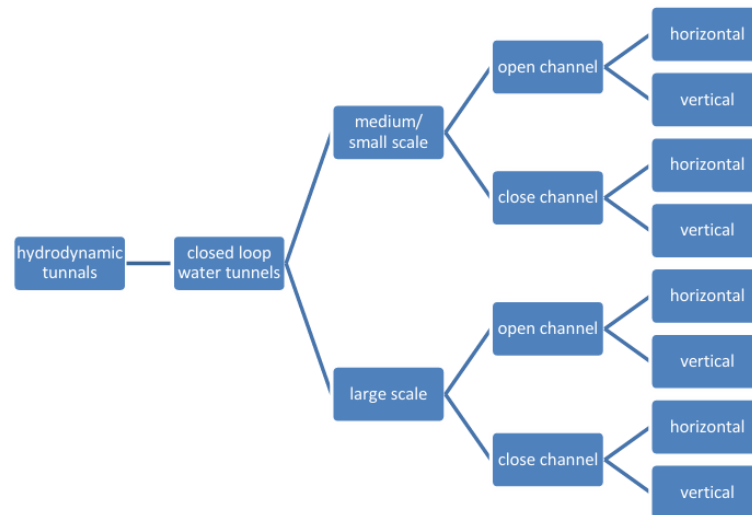


Figure 2.1: Different types of HDT configurations

The key characteristics of each configuration are summarized in Table 2.1:

Table 2-1: Comparison of hydrodynamic tunnel configuration options

Configuration	Max. velocity	Turbulence intensity	Velocity control	Fabrication complexity	Space requirement
Circuit type					
Horizontal, closed-circuit	Up to 18 m/s[PSU-ARL 12-inch tunnel, Elbing 2018]	<0.3%[Elbing et al., 2018]	Full range (VFD or valve)	Moderate - standard layout, many proven designs	Large floor area; ~4–10 m circuit length typical
Vertical, closed-circuit	Up to 13 m/s[UNH HiCAT, Nedyalkov 2012]	<1% typical[Nedyalkov 2012]	Full range (VFD)	High complex structural design, air management required	Compact; ~50% smaller floor footprint than horizontal equivalent
Open-circuit	0.2–5 m/s (pump-limited)[Saeed et al., 2018]	0.4–3%[open-circuit reference tunnels, Vassilicos 2011]	Limited - no recirculation; single pass only	Low - few components, simple plumbing	Moderate - reservoir or drain required
Test section type					

Open-channel test section	<2 m/s (free-surface wave onset limits)[Surahmanto et al., 2023]	0.04–0.1% achievable[Surahmanto et al., 2023; TI = 0.04% with 12-vane diffuser]	Moderate - velocity limited by Froude number constraint ($Fr < 1$)	Low - no pressure sealing required; direct probe access	- (integrated into circuit)
Closed-channel test section Selected	Up to 18 m/s[PSU-ARL tunnel, Elbing 2018]	<0.3%[Elbing et al., 2018; OSU tunnel: 10 m/s, TI <0.3%]	Excellent - velocity and pressure independently controllable	High - pressure-tight seals, complex instrumentation	- (integrated into circuit)

2.3 Key Design Parameters and Their Influence on Flow Quality

The flow quality within the test section of a hydrodynamic tunnel characterized primarily by velocity uniformity, turbulence intensity, and the absence of swirl or secondary flows is not determined by any single component but by the cumulative effect of design decisions made across the entire circuit. Several key parameters govern this relationship.

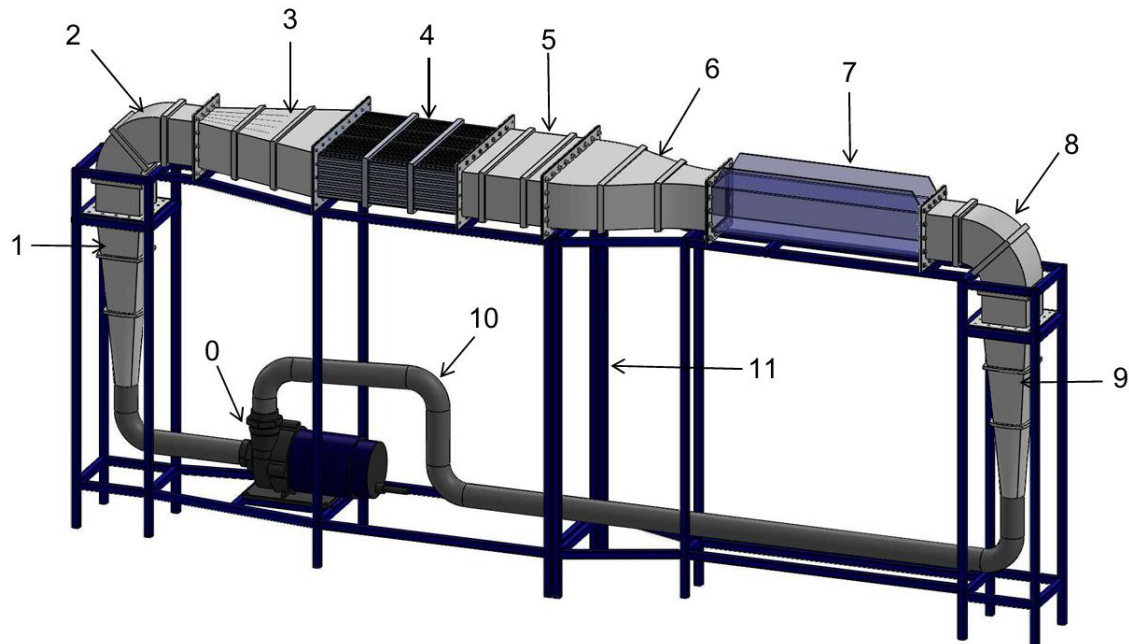


Figure 2.2: Components in selected tunnel configuration

PART NO	PART NAME
0	Water pump
1	Transition section 1
2	Rectangular bend 1

3	Wide angle diffuser
4	Honeycomb section
5	Settling chamber
6	Contraction section
7	Test section
8	Rectangular bend 2
9	Transition section 2
10	PVC pipes
11	Support structure

Contraction ratio - Contraction ratio is defined as the ratio of the inlet cross-sectional area to the test section area and is one of the most influential parameters in tunnel design. A higher contraction ratio accelerates the flow more aggressively, which suppresses upstream turbulence and non-uniformities more effectively, resulting in a more uniform velocity profile at the test section inlet. Research-grade tunnels typically employ contraction ratios between 6:1 and 16:1, with values around 7:1 representing a practical compromise between flow quality and physical size for small/medium-scale facilities [1], [2].

Diffuser half-angle - This governs the rate at which the flow decelerates and expands after the test section. If the half-angle is too large, the adverse pressure gradient causes the boundary layer to separate from the diffuser walls, generating large-scale turbulence and flow instability that can propagate upstream. A half-angle of 7° is widely cited as the upper limit for attached flow in a conventional diffuser without additional flow conditioning [3], [9].

Honeycomb length-to-cell-diameter ratio - The honeycomb length-to-cell-diameter ratio (L/D) is defined as the ratio of the streamwise cell length L to the individual cell diameter D , and characterizes the aspect ratio of each flow channel formed by the honeycomb structure. This ratio directly controls the effectiveness of turbulence suppression in the settling chamber. Values between 6 and 10 are recommended for most small/medium-scale tunnels, balancing turbulence reduction against pressure loss. Ratios below this range insufficiently break down large turbulent eddies, while excessively high values introduce unnecessary head loss [10].

Blockage ratio - The ratio of model frontal area to test section cross-sectional area affects the measured flow conditions around the test model. A blockage ratio below 10% is generally recommended to ensure that the presence of the model does not significantly alter the free-stream velocity [20].

Turbulence intensity - Turbulence intensity at the test section inlet is the ultimate measure of flow quality and is influenced by the combined performance of the honeycomb, screens, settling chamber length, and contraction. For most experimental purposes, a turbulence intensity below 1% is considered acceptable [1], [3].

2.4 Test Section Design and Reynolds Number Considerations

The test section is the most critical component of the hydrodynamic tunnel, as it is where experimental measurements are made and flow quality requirements are most stringent. Its design must balance several competing considerations including cross-sectional dimensions, length, shape, optical access, and structural transparency.

Cross-sectional shape and dimensions are selected based on the intended experimental objectives. Rectangular and square cross-sections are most common in small/medium-scale tunnels due to their ease of fabrication and good optical access. Three shape variants are documented in the literature: a pure square section, a square with fixed corner fillets, and a square with longitudinally diminishing fillets.

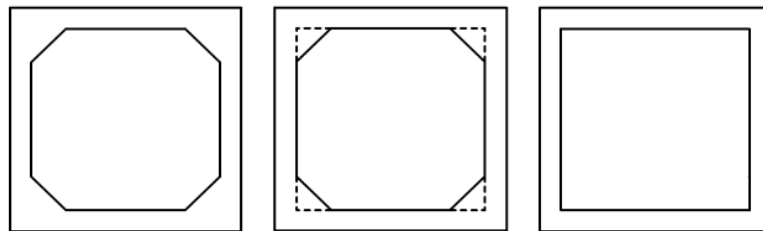


Figure 2.3: Test section shape alternatives. From left to right: square with fillets, square with diminishing fillets, and square.

The pure square maximizes optical access and is well-suited for flow visualization techniques. Corner fillets reduce secondary flows generated at sharp corners, improving velocity uniformity, while diminishing fillets additionally compensate for boundary layer growth along the test section length [2].

Test section length is governed by boundary layer development. As flow travels along the test section walls, the boundary layer thickens, progressively reducing the effective free-stream area and introducing a streamwise pressure gradient. The test section length must therefore be limited to ensure the boundary layer remains thin enough that the central flow velocity profile is not significantly affected. For the turbulent boundary layer, thickness grows approximately as,

$$\delta \propto 0.16 Re_x^{-1/7} \quad (1)$$

establishing a practical upper limit on usable length [8].

Where $Re_x^{(\cdot)}$ = Reynolds number for plate with length of x .

Reynolds number formulation for external flow experiments in a hydrodynamic tunnel differs fundamentally from internal flow assumptions. When testing a submerged body such as a cylinder, if we want to test the flow around that body, the relevant Reynolds number is based on the model's characteristic dimension typically its diameter rather than the hydraulic diameter of the test section. For a circular cylinder, the Reynolds number written as,

$$Re_D = \frac{UD}{\nu} \quad (2)$$

where U is the free-stream velocity, D is the cylinder diameter, and ν is the kinematic viscosity of water. This distinction is critical because it determines the flow regime experienced by the test model independently of the tunnel dimensions [8], [3].

For the present tunnel, the target Reynolds number range of 0 to approximately 8,000 based on cylinder diameter is sufficient to reproduce the principal external flow regimes around a circular cylinder, from laminar steady flow through vortex pair formation, laminar vortex shedding, and into the transitional unsteady regime, as shown in Figure 2.2 [18].

2.5 Contraction Section Design

The contraction section accelerates the flow from the large cross-sectional area of the settling chamber to the smaller test section area, and in doing so performs three critical functions: establishing the required test section velocity, suppressing upstream turbulence and velocity non-uniformities through flow acceleration, and delivering a uniform, low-turbulence free-stream at the test section inlet [1].

2.5.1 Contraction Ratio and Velocity Uniformity

The contraction ratio, defined as the ratio of the inlet area to the exit area, is the primary design parameter governing how effectively upstream disturbances are suppressed. As the flow accelerates through the contraction, lateral velocity fluctuations are reduced proportionally to the contraction ratio, while axial fluctuations are reduced by its square root. Higher contraction ratios therefore produce more uniform and lower-turbulence flow at the test section inlet [13].

For small/medium-scale low-speed tunnels, contraction ratios between 6:1 and 10:1 are widely recommended in the literature, with a value of approximately 7:1 representing a practical design starting point that balances flow quality against the physical size of the settling chamber inlet [1], [2]. Ratios below this range provide insufficient turbulence suppression, while excessively high ratios result in impractically large inlet dimensions.

2.5.2 Contraction Curve Geometries (Bell-Mehta, Fifth-Degree Polynomial)

The shape of the contraction wall profile is equally important to the contraction ratio. An abrupt or poorly designed contraction can cause boundary layer separation on the walls, generating turbulence that directly degrades test section flow quality. Three contour types are documented in the literature: circular arc, cubic polynomial, and fifth-degree polynomial profiles.

The fifth-degree polynomial contour, originally developed by Bell and Mehta, is the most widely adopted in modern tunnel design [1], [2]. It ensures zero wall slope and zero curvature at both the inlet and exit of the contraction, providing smooth joins with the upstream settling chamber and downstream test section and eliminating inflection-point-induced separation. Cubic and circular arc contours, while simpler to manufacture, introduce inflection points that risk localized flow separation and are therefore not recommended for low-turbulence applications [13]. The Bell-Mehta polynomial profile has been successfully implemented across a wide range of tunnel scales, from small educational facilities to high-Reynolds-number research tunnels [2], [3].

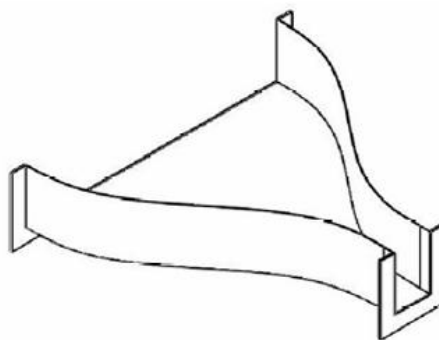


Figure 2.4: Bell-Mehta fifth-degree polynomial contraction contour

2.6 Diffuser Design

The relationship between diffuser geometry and performance is well established in the works of Reneau, Johnston, and Kline [11] and Sagi and Johnston. Their studies demonstrate that optimum diffuser effectiveness is achieved at a total divergence angle of approximately 7° ,

as this represents the threshold at which flow separation is minimized, thereby maximizing pressure recovery. Furthermore, the length-to-inlet-width ratio (L/W) should not exceed 25 to ensure attached flow and acceptable performance. These findings are independently supported by Nedyalkov [2], who arrived at the same optimal divergence angle for minimizing flow separation in water tunnel diffuser design.

2.6.1 Conventional Diffusers

In a conventional straight-walled diffuser, the rate of area expansion is characterized by the half-angle of divergence. If this angle is too large, the boundary layer separates from the diffuser walls, producing large-scale turbulence, pressure fluctuations, and flow instability that can propagate upstream into the test section. A half-angle of 7° is widely established in the literature as the practical upper limit for achieving reliable pressure recovery without flow separation [3], [9].

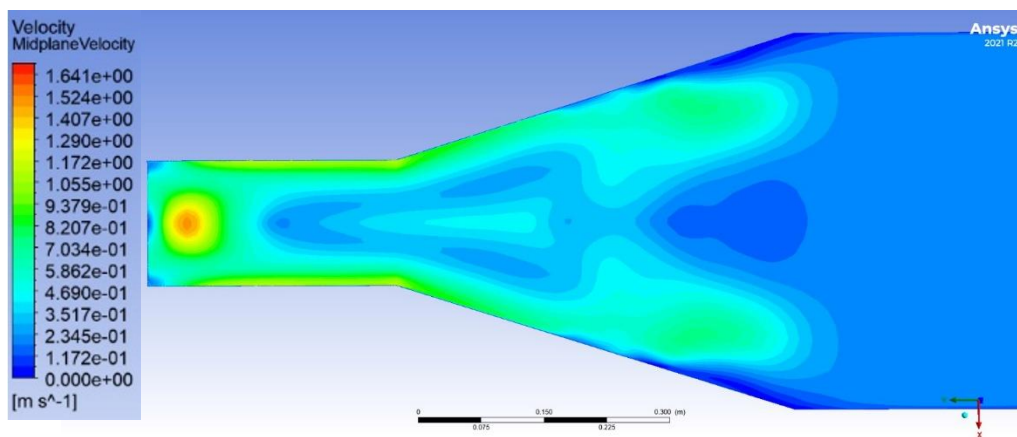


Figure 2.5: Conventional diffuser geometry showing half-angle of divergence
Source: ANSYS Flow simulation results

To meet the area ratio requirements of a tunnel circuit while maintaining this conservative angle, conventional diffusers must be made physically long. In space-constrained laboratory settings this is often impractical, and multi-stage diffusion strategies are commonly employed instead. The University of New Hampshire HiCAT tunnel, for example, uses three sequential diffusers with half-angles of 3.5° , 6° , and 4° respectively to manage the progressive deceleration of flow across the full circuit [2].

Figure 2.6 typically illustrates how flow expands at a high divergence angle while internal devices such as screens or vanes break up large-scale turbulence structures. This helps maintain a more uniform velocity distribution and reduces the risk of boundary layer

separation along the diffuser walls. The trade-off is increased pressure loss due to energy dissipation across the screens.

2.6.2 Wide-Angle Diffusers with Screens and Vanes

Where spatial constraints prevent the use of a long conventional diffuser, a wide-angle diffuser provides a compact alternative. A wide-angle diffuser uses a much larger divergence angle potentially exceeding 45° but incorporates internal flow conditioning elements to prevent separation. Two approaches are documented in the literature.

The first uses fine wire mesh screens stretched across the diffuser cross-section. The screens introduce a controlled pressure drop that stabilizes the flow and suppresses separation, though they increase overall head loss [3].

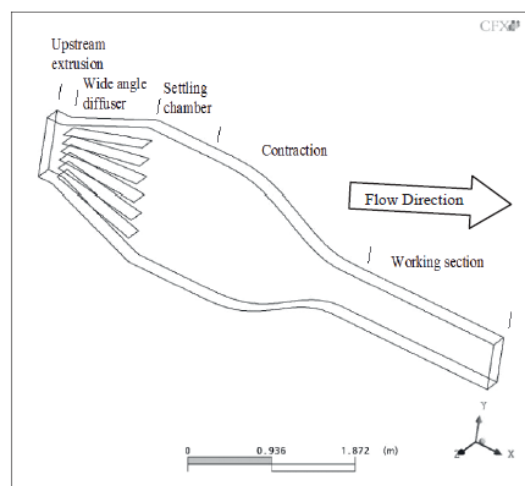


Figure 2.6: Internal guide vanes within a wide-angle diffuser

The second approach uses internal guide vanes that subdivide the diffuser passage into smaller channels, each with an effective diffusion angle at or below 7° . As illustrated in Figure 2.6, the guide vanes are positioned within the wide-angle diffuser to guide the flow through narrower passages, thereby reducing adverse pressure gradients and preventing boundary layer separation. Cochran and Kline demonstrated that six full-length flat vanes within a 49° wide-angle diffuser reduced the effective passage angle to 7° , achieving stable, attached flow throughout [9]. This approach significantly reduces the overall system length while maintaining good flow quality, making it a preferred solution for space-constrained hydrodynamic tunnel designs [3], [2].

2.7 Flow Conditioning - Honeycomb Structures and Screens

Flow conditioning components are placed upstream of the contraction section to reduce turbulence intensity, eliminate swirl, and promote a uniform velocity distribution before the flow enters the test section. In hydrodynamic tunnels, the two primary conditioning elements are honeycomb structures and wire mesh screens, housed within a settling chamber [3].

Honeycomb structures consist of arrays of parallel cells oriented along the flow direction, functioning to break down large-scale turbulent eddies into smaller, more rapidly decaying structures and to eliminate swirl generated by upstream bends and the pump. Hexagonal cells are preferred for their gapless tiling and uniform flow distribution [10]. The two governing design parameters are the turbulence reduction factor η and the pressure drop coefficient k , which conflict greater turbulence suppression increases pressure loss. The length-to-cell-diameter ratio (L/D) is the primary design variable balancing these objectives, with values between 6 and 10 recommended for small/medium-scale applications [10], [8].

The settling chamber downstream of the honeycomb allows residual turbulence to decay before the contraction. A chamber length of 30 to 40 cell diameters is generally sufficient for this purpose [8], [3].

Wire mesh screens complement the honeycomb by targeting the axial component of turbulence, which honeycombs alone do not effectively suppress. Screens introduce a controlled pressure drop that redistributes momentum and breaks down large axial eddies. An open area ratio of at least 58 - 60% is recommended to avoid flow instability, and where multiple screens are used in series, a spacing of at least 50 to 75 mesh sizes between them allows the wake of each screen to decay sufficiently [3], [13].

Used in combination, honeycombs and screens produce a synergistic conditioning effect the honeycomb removes swirl and lateral fluctuations while the screens reduce axial turbulence together achieving turbulence intensities below 1% at the test section inlet in well-designed facilities [10], [3].

2.8 Head Loss Analysis Methods

Accurate estimation of head loss across each component of the tunnel circuit is necessary to determine the pump head requirement and ensure that the selected pump can sustain the desired flow velocity. Total head loss in a hydrodynamic tunnel circuit comprises both major losses, arising from skin friction along straight pipe and duct sections, and minor losses,

arising from flow through individual components such as bends, diffusers, contractions, honeycombs, and screens [8].

Major losses are calculated using the Darcy-Weisbach equation:

$$h_f = f \left(\frac{L}{D_h} \right) \left(\frac{U^2}{2g} \right) \quad (3)$$

where f is the Darcy friction factor, L is the duct length, D_h is the hydraulic diameter, and U is the mean flow velocity. For turbulent flow, the friction factor is obtained from the Moody chart or the Colebrook-White equation as a function of Reynolds number and relative wall roughness [8].

Minor losses for each component are expressed in terms of a dimensionless loss coefficient K , such that,

$$h_m = K \frac{U^2}{2g} \quad (4)$$

Loss coefficients for standard components bends, contractions, diffusers, and screens are obtained from established empirical correlations and experimental data available in the literature. For components with complex geometry, such as honeycombs and wide-angle diffusers with vanes, loss coefficients are determined from component-specific design charts and validated CFD results [8], [3].

The total system head loss is the sum of all major and minor losses around the complete circuit. Comparing this total against the available pump head establishes whether the selected pump is sufficient and identifies which components contribute most significantly to energy loss. This analysis also informs component optimization decisions if total head loss is found to be small relative to available pump head, as was observed in several reviewed designs [3], it indicates that flow quality indicators such as turbulence intensity and velocity uniformity are more appropriate optimization criteria than head loss minimization alone.

2.9 Structural Considerations for Tunnel Fabrication

The structural design of hydrodynamic tunnel components must ensure that all parts can withstand the internal pressure exerted by the water column without excessive deformation or failure, while remaining practically manufacturable within the constraints of available facilities, budget, and material options [8].

The primary structural load on tunnel components is the hydrostatic pressure from the internal water column, which acts outward on all wetted surfaces. For a vertical closed-loop tunnel, this pressure varies with depth and must be evaluated at the worst-case location for each component. Wall thickness, material selection, and the use of reinforcing ribs or stiffeners are the principal means by which structural adequacy is achieved [3].

Material selection for small/medium-scale tunnel fabrication involves a trade-off between structural performance, water resistance, optical transparency, weight, and cost. Acrylic and tempered glass are commonly used for test section walls where optical access is required, offering good transparency and adequate strength for low-pressure applications [4]. For non-transparent structural components such as diffusers, settling chambers, and bends, materials such as stainless steel, mild steel, and fiber-reinforced composites are documented in the literature. Glass fiber reinforced polymer (GFRP) in particular offers an attractive combination of high strength-to-weight ratio, corrosion resistance, and formability into complex shapes using relatively simple mould-based fabrication methods properties that make it well-suited to the fabrication of curved tunnel components in resource-constrained settings [8].

Finite Element Analysis (FEA) is widely used in tunnel component design to evaluate stress distributions and deformations under internal pressure loading, allowing wall thicknesses and reinforcement arrangements to be optimised before fabrication. Studies have shown that plain shell structures without reinforcement are often insufficient to meet deflection limits under realistic water column pressures, and that the addition of ribs or external stiffeners is typically necessary to achieve adequate structural performance within practical wall thickness constraints [3], [8].

2.10 Summary and Justification of Selected Design Direction

The literature review presented in the preceding sections establishes the theoretical and empirical basis upon which the design decisions for this project were made. Drawing from the reviewed configurations, design parameters, and fabrication approaches, each major design decision is summarized and justified in Table 2.2.

Table 2-2: Summary of selected design decisions and justifications

Design Decision	Selected Option	Justification
Tunnel orientation	Vertical	Minimizes floor space within 2.5 m height constraint; facilitates air bubble removal and gravity-assisted return flow
Circuit type	Closed-loop	Ensures stable, repeatable flow conditions with minimal water consumption
Test section type	Open-channel	Eliminates pressure sealing requirements; reduces fabrication complexity and cost; allows direct access for visualization and probes
Contraction ratio	$\sim 7:1$	Literature consensus for small/medium-scale low-turbulence tunnels; balances flow quality against settling chamber size
Contraction contour	Bell-Mehta 5th-degree polynomial	Ensures zero wall slope and curvature at both ends; prevents separation-induced turbulence
Diffuser type	Wide-angle with internal guide vanes	Satisfies spatial constraints while maintaining flow quality; reduces effective passage angle to 7° per channel
Flow conditioning	Honeycomb ($L/D = 6-10$) + wire mesh screens	Suppresses lateral and axial turbulence components achieves turbulence intensity below 1%
Fabrication material	Glass fiber reinforced polymer (GFRP)	High strength-to-weight ratio; corrosion resistant; formable into complex shapes within available budget

The pump procured by the department (SOLEX SX318/3T Centrifugal Electrical water pump) delivers a flow rate of $0.0136 \text{ m}^3/\text{s}$, which together with the selected test section dimensions produces a Reynolds number range of 0 to approximately 8,000 based on cylinder diameter sufficient to reproduce all principal external flow regimes around a circular cylinder from laminar steady flow through to transitional unsteady flow.

3 Chapter 3 - Methodology

3.1 Summary of Methodology

The methodology adopted in this project follows a structured, sequential design process comprising four main phases: initial design and analytical calculations, simulation-based optimization, detailed design, and fabrication. This approach ensures that each design decision is systematically justified before progressing to the next phase, minimizing the risk of costly design revisions during fabrication.

In the first phase, the tunnel configuration was selected through a comparative analysis of existing hydrodynamic tunnel designs as documented in the literature. Following configuration selection, analytical calculations were carried out for each major component to establish preliminary dimensions based on fluid dynamics principles and empirical design guidelines. A MATLAB-based head loss model was developed to evaluate the total system head loss and verify pump adequacy. Flow visualization using the hydrogen bubble technique was also identified and integrated into the design at this stage.

In the second phase, single-phase CFD simulations were carried out in ANSYS Fluent to evaluate and optimize the flow behavior within critical components, particularly the wide-angle diffuser and vertical diffusers. Finite Element Analysis (FEA) was conducted in parallel to assess the structural integrity of glass fiber components under internal water column pressure and to determine the reinforcement requirements.

In the third phase, the insights gained from analytical calculations and simulation results were consolidated into a detailed design, comprising finalized component dimensions, a complete CAD model, and engineering drawings suitable for fabrication.

In the fourth phase, all primary structural components were fabricated using glass fiber and steel bars and sheets, following the specifications established in the detailed design phase. Assembly of the complete tunnel circuit and experimental validation are carried out as the final stage of the project.

3.2 Initial Design and Analytical Calculations

The initial design phase comprised four sequential activities: configuration selection, component design and sizing, head loss analysis, and flow visualization implementation. Each activity informed the next, with the outputs of each stage feeding directly into the simulation and optimization phase described in chapter 4.

3.2.1 Configuration Selection Approach

The tunnel configuration was selected through a systematic review of existing hydrodynamic tunnel facilities documented in the literature, followed by evaluation against a defined set of project constraints. The primary constraints governing the selection were:

- Available pump flow rate: $Q = 0.0136 \text{ m}^3/\text{s}$ (13,000 gph) at 30 feet head
- Total material budget: LKR 200,000
- Maximum vertical height: 2.5 m
- Fabrication limited to locally available materials and methods
- Target Reynolds number range: $Re = 0 - 8,000$ (based on cylinder diameter 20mm to 10 mm)

Four configuration categories were identified and reviewed: small/medium-scale open-channel horizontal, small/medium-scale closed-channel horizontal, small/medium-scale closed-channel vertical, and large-scale closed-channel horizontal. Each was evaluated against the project constraints using the criteria summarized in Table 3.1.

Table 3-1: Evaluation of tunnel configurations against project constraints

Criterion	Open-Channel Horizontal	Closed-Channel Horizontal	Closed-Channel Vertical	Large-Scale Horizontal
Max. achievable velocity	Low (~0.5 m/s)	Moderate	Moderate–High	High
Flow quality	Poor–Moderate	Good	Good	Excellent
Pressure control	No	Limited	Limited	Yes
Fabrication complexity	Low	Moderate	High	Very High
Space requirement	Large floor area	Large floor area	Small floor area	Very large
Budget compatibility	✓	✓	✓	✗
Height constraint (2.5 m)	✗	✗	✓	✗

The vertical closed-channel configuration with an open-channel test section was identified as the only option satisfying all constraints simultaneously. The Reynolds number feasibility of the selected configuration was confirmed using the continuity equation and the external flow Reynolds number formulation:

$$U_{ts} = \frac{Q}{A_{ts}} \quad (5)$$

$$Re = \frac{U_{ts} \cdot D}{\nu} \quad (6)$$

where A_{ts} is the test section cross-sectional area, D is the cylinder diameter, and $\nu = 1.0 \times 10^{-6} \text{ m}^2/\text{s}$ is the kinematic viscosity of water at 20°C. Two test section sizes were evaluated as shown in Table 3.2.

Table 3-2: Reynolds number feasibility check for candidate test section sizes

Test Section Size (m)	Area (m ²)	U _{ts} (m/s)	Re (D = 50 mm)
0.30 × 0.30	0.09	0.151	~7,550
0.15 × 0.15	0.023	0.604	~30,200

The 0.15 × 0.15 m test section was selected as it produces a Reynolds number of approximately 30,200 at full pump flow for a 50 mm diameter cylinder - sufficient to reproduce all target flow regimes from laminar steady flow ($Re < 5$) through to transitional unsteady flow ($Re < 3 \times 10^5$), as required by the experimental objectives [2], [3].

3.2.2 Component Design and Sizing

The tunnel circuit was divided into its primary functional components, with each member responsible for the analytical design of assigned components. The design of each component followed a sequential approach: establishing governing equations from literature, selecting key design parameters within recommended ranges, and computing final dimensions based on the available flow rate $Q = 0.0136 \text{ m}^3/\text{s}$. The following subsections present the analytical design methodology for the contraction section and interconnecting pipelines.

Wide-Angle Diffuser Design

In many established references, a divergence half-angle of 7° is recommended as the maximum angle for a diffuser to maintain attached flow and achieve efficient pressure recovery [2]. However, adopting a 7° divergence angle would result in an excessively long diffuser that is not practical within the physical constraints of the tunnel layout, and it is difficult to achieve a large pressure recovery within a compact length at this angle. Therefore, a wide-angle diffuser configuration was selected to achieve the required pressure recovery within a compact length.

The primary function of the wide-angle diffuser is to decelerate the flow and convert kinetic energy into static pressure before the flow enters the honeycomb flow straightener and settling chamber. The key design parameters of the wide-angle diffuser are summarized in Table 1, and were established with reference to the foundational work of Reneau, Johnston, and Kline [11] on the performance and design of straight, two-dimensional diffusers, and Waitman, Reneau, and Kline [12] on the effects of inlet conditions on diffuser performance. Given the large divergence angle adopted, flow separation was anticipated within the diffuser. CFD simulation was therefore carried out to assess the extent of flow separation and its effect on the downstream flow quality. If the simulation revealed that the separation significantly degraded the flow conditions, splitter vanes would be introduced into the diffuser as a corrective measure. The CFD analysis and its findings are discussed in detail in Chapter 4.

Table 3-3: Wide angle diffuser -Design parameters

Parameter	Description	Value
2θ	Total divergence angle	35°
AR	Area ratio	3
W_{in}	Inlet width	150 mm
W_{out}	Outlet width	450 mm
N	Diffuser length	475.74 mm
N/W	Length to inlet width ratio	3.17

Vertical Diffuser Design

The vertical transition section serves a dual purpose in the hydrodynamic tunnel circuit. Its primary function is to decay the turbulence generated by the pump before the flow reaches the downstream components. Additionally, it is specifically designed to counteract the gravitational pressure drop that occurs as the fluid ascends vertically. In a standard vertical pipe of constant diameter, static pressure decreases significantly as the fluid rises due to the hydrostatic head associated with the weight of the fluid column. By expanding the cross-sectional area along the flow direction, the transition section converts a portion of the fluid's dynamic pressure into static pressure, achieving pressure recovery that compensates for this gravitational loss. The finalized design parameters are summarized in Table 3.4.

Table 3-4: Design Parameters

Parameter	Value
Length (L)	613.12 mm
Inlet Diameter (W)	75 mm
Total Divergence Angle	7°
Area Ratio (AR)	5.09
Length-to-Width Ratio (L/W)	8.17 (< 25)
Outlet Dimensions	150 mm × 150 mm

Based on the diffuser design guidelines established in the literature (Section 2.6), a total divergence angle of 7° was adopted for the vertical diffuser, as this minimizes flow separation while maximizing pressure recovery. The resulting length-to-inlet-width ratio of $L/W = 8.17$ comfortably satisfies the established upper limit of 25, confirming the validity of the selected geometry.

Test section

Based on the comparative analysis of test section configurations presented in Section 2.2.3, a rectangular open-channel test section was adopted for the present tunnel. This selection is justified by the low operating velocity, the laboratory-scale fabrication constraints, and the primary experimental objective of flow visualization around a cylinder model.

The dimensions of the test section were selected according to the available pump capacity, desired Reynolds number range, blockage limitations, and laboratory space constraints. The test section was designed to operate mainly within the transitional unsteady flow region ($150 < Re < 3 \times 10^5$). Due to the limitation of the available university pump capacity, achieving Reynolds numbers higher than 3×10^5 is not practical. Increasing the Reynolds number beyond this range would require significantly higher flow velocities and pump power, resulting in increased system cost and pressure losses. Therefore, the test section dimensions and flow velocity were selected to achieve the maximum possible Reynolds number within the pump capability while still enabling meaningful hydrodynamic experiments and flow visualization.

Flow pattern	Reynolds number	Description
	$Re < 5$	No separation, laminar steady flow
	$5 < Re < 45$	Pair of vortices, laminar steady flow
	$45 < Re < 150$	Laminar vortex street, unsteady flow
	$150 < Re < 3 \cdot 10^5$	Transitional unsteady flow
	$3 \cdot 10^5 < Re < 3 \cdot 10^6$	Turbulent unsteady flow
	$Re > 3 \cdot 10^6$	Turbulent vortex street, unsteady flow

Figure 3.1: 2D cylinder flow at different Re numbers

The selected range is sufficient for studying important flow phenomena such as flow separation, vortex shedding, transition to turbulence, and wake formation around test models. Since the available pump can deliver a maximum flow rate of approximately 0.0136 m³/s, the tunnel was designed as a small -scale low-speed water tunnel. A test section size of 0.15 m × 0.15 m was selected to achieve desired Reynolds number range while maintaining manageable fabrication dimensions.

The average flow velocity inside the test section was determined using the continuity equation,

$$U = \frac{Q}{A} \quad (5)$$

Where:

- (U) = average flow velocity (m/s)
- (Q) = volumetric flow rate (m³/s)
- (A) = cross-sectional flow area (m²)

For the selected test section:

$$A = 0.15 \times 0.15 = 0.0225 \text{ m}^2$$

$$U = 0.0136 / 0.0225 \approx 0.604 \text{ m/s}$$

The Reynolds number was then calculated to evaluate whether the tunnel can achieve laminar-to-turbulent transitional flow conditions in the test section to visualize the flow behavior change with velocity clearly.

$$Re_D = \frac{UD}{\nu} \quad (7)$$

Where:

- (D) = characteristic length (hydraulic diameter of 50mm cylinder)
- (ν) = kinematic viscosity of water

Using (D = 0.15 m),

$$Re = (0.604 \times 0.05) / (1.0 \times 10^{-6}) \approx 30,200$$

This Reynolds number range is suitable for studying flow behavior in the transitional and turbulent regions for many hydrodynamic models.

Another important consideration in the test section design is the blockage ratio, which indicates how much of the flow area is occupied by the test model. Excessive blockage can accelerate the flow around the model and affect measurement accuracy. The blockage ratio is defined as,

$$\text{Blockage Ratio} = \frac{A_{\text{model}}}{A_{\text{test section}}} \quad (8)$$

Boundary layer growth was analyzed using MATLAB to minimize velocity non-uniformity. A 75 cm length was selected to allow flow stabilization, model placement, and measurement access while limiting pressure losses and boundary layer effects in the rectangular open-channel tunnel.

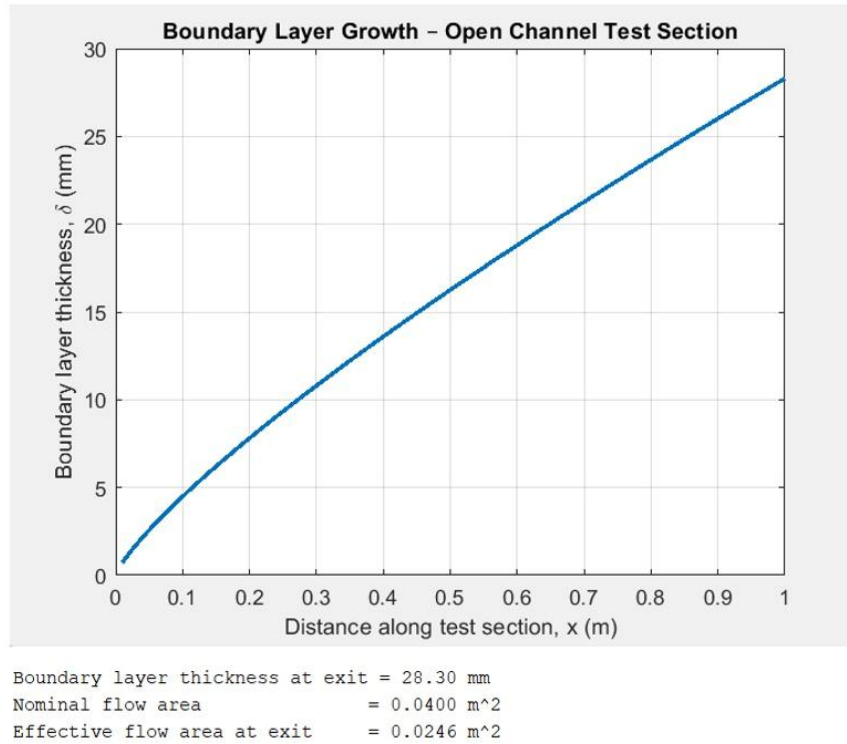


Figure 3.2: Boundary layer growth graph of open channel test section using MATLAB

Flow conditioning and honeycomb structure

The honeycomb cross section is sized to match the inlet face of the contraction cone.

Overall Width	600 mm
Overall Height	200 mm
Pump Flow Rate (Q)	13,000 gal/hr = 0.01367 m ³ /s
Average Flow Velocity (U)	$U = Q / A = 0.114$ m/s

Cell Diameter Selection

The cell diameter (D) is selected so that, the honeycomb contains many cells across the duct, and the resulting cell Reynolds number exceeds the turbulent threshold ($Re_D > 2000$) [8].

The diameter Reynolds number is,

$$Re_D = \frac{UD}{\nu} \quad (9)$$

Most literature recommends cell diameters in the range of 5 - 20 mm using commercially available polymer or aluminum honeycomb. Hexagonal cells are preferred as they eliminate

spatial gaps and ensure uniform flow distribution. Turbulent cell flow ($Re_D > 2000$) is preferred over laminar because it produces a more uniform exit velocity profile reducing velocity and pressure gradients downstream and therefore less residual turbulence in the test section.

Selected Cell Diameter (D)	10 mm
Diameter Reynolds Number (Re_D)	$Re_D = (0.114 \times 0.010) / 1.004 \times 10^{-6} \approx 2200$
Turbulence Criterion	$Re_D = 2200 > 2000$
Cell Shape	hexagonal preferred

The Reynolds number based on diameter and length, together with the length to diameter ratio, can be used to determine the pressure drop coefficient using Figure 3.3 (Chart 2). Additionally, the ratio of initial integral length scale to cell length, along with the pressure drop coefficient, can be used to estimate the turbulence intensity using Figure 3.3 (Chart 1) [8].

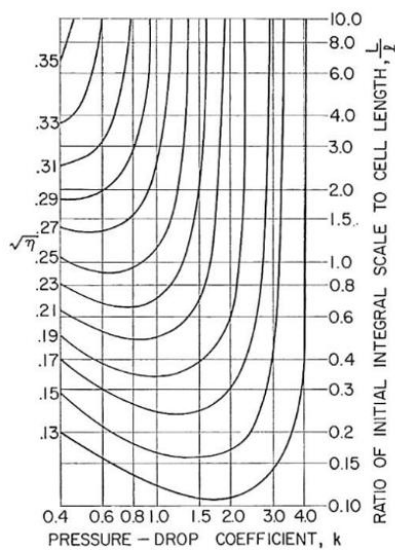


Fig. 1

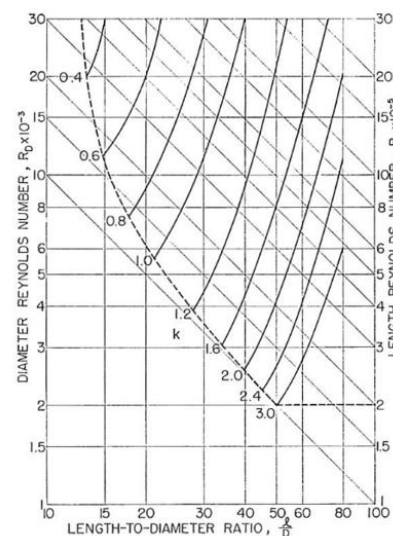


Fig. 2

Figure 3.3: Fig. 1 Isoreduction contours as a function of pressure-drop coefficient and ratio of integral scale of initial turbulence to cell length, Fig. 2 Pressure-drop coefficient and length Reynolds number as a function of diameter Reynolds number and length-to-diameter ratio. Flow is fully developed above and to the right of the dashed line.

Honeycomb Length Selection

The honeycomb length (l) is governed by the length-to-diameter ratio l/D . Practical designs require $l/D \geq 5$ to ensure effective turbulence suppression. A length of $l = 500$ mm is selected

to achieve $l/D = 50$, placing the operating point well within the fully developed turbulent flow regime on the Lumley & McMahon chart.

Selected Honeycomb Length (l)	500 mm
Length-to-Diameter Ratio (l/D)	$500 / 10 = 50$
Length Reynolds Number (Re _l)	$Re_l = (0.114 \times 0.50) / 1.004 \times 10^{-6} \approx 10^5$
Flow Regime	Fully developed turbulent cell flow

Pressure-Drop Coefficient

Using $Re_D \approx 2200$ and $l/D = 50$ as coordinates, the pressure-drop coefficient k is read from the Lumley & McMahon Fig. 2 chart (Pressure-drop coefficient vs. length-to-diameter ratio). The operating point falls above and to the right of the dashed line, confirming fully developed flow within the cells.

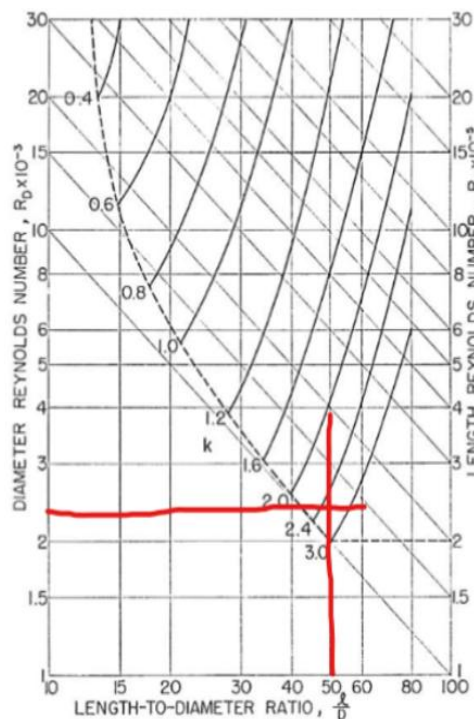


Figure 3.4: Variation of pressure-drop coefficient and length Reynolds number as a function of diameter Reynolds number and length-to-diameter ratio, indicating fully developed flow region above and to the right of the dashed line. The pressure loss across the honeycomb [8]

$$\Delta p = \frac{k \rho U^2}{2} \quad (10)$$

Pressure-Drop Coefficient (k)	2.4 (from Lumley & McMahon)
Water Density (ρ)	1000 kg/m ³
Dynamic Pressure ($\frac{1}{2}\rho U^2$)	$\frac{1}{2} \times 1000 \times 0.114^2 = 6.50$ Pa
Pressure Loss (Δp)	$\Delta p = 2.4 \times 6.50 \approx 15.6$ Pa

Integral Turbulence Length Scale (L)

The integral turbulence length scale L is a measure of the largest turbulent structures in the approaching flow. As a conservative engineering estimate for the current facility, L is taken as half the hydraulic diameter at the honeycomb inlet consistent with the approach used by Libin Daniel (Embry-Riddle Aeronautical University) and supported by Lumley & McMahon ($L \approx 0.3\text{--}0.5 \times$ upstream duct diameter).

The hydraulic diameter of the rectangular honeycomb section is:

$$D_h = \frac{4A}{P} = 0.30 \text{ m} \quad (11)$$

$$L = \frac{D_h}{2} = 0.15 \text{ m} \quad (12)$$

Honeycomb Area (A)	$0.60 \times 0.20 = 0.12$ m ²
Wetted Perimeter (P)	$2 \times (0.60 + 0.20) = 1.60$ m
Hydraulic Diameter (D_h)	0.30 m
Integral Length Scale (L)	$L = 0.15$ m
L / l Ratio	$0.15 / 0.50 = 0.30$

Turbulence Reduction Factor (η)

The turbulence reduction factor η is defined as the ratio of downstream to upstream mean-square velocity fluctuations.

$$\eta = \frac{u'^2_{\text{downstream}}}{u'^2_{\text{upstream}}} \quad (13)$$

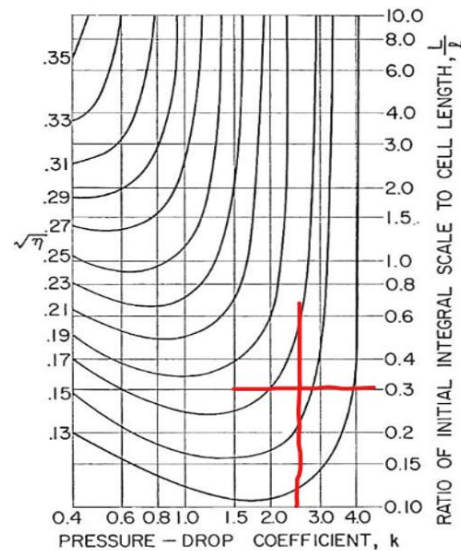


Figure 3.5 : Iso-reduction contours showing the relationship between pressure-drop coefficient and the ratio of the integral length scale of initial turbulence to the cell length [8]

Entering the Lumley & McMahon Fig. 1 chart with the pressure-drop coefficient $k = 2.4$ and the L/l ratio = 0.30, the velocity-based turbulence reduction factor $\sqrt{\eta}$ is read off the y-axis.

$$\sqrt{\eta} \approx 0.15 \rightarrow \eta \approx 0.023$$

A value of $\sqrt{\eta} = 0.15$ means the RMS turbulent velocity downstream of the honeycomb is only 15% of the upstream value and 85% reduction in turbulence intensity. This confirms the honeycomb design is highly effective [8].

k (pressure-drop coefficient)	2.4
L/l ratio	0.30
Chart Reference	Lumley & McMahon Fig. 1
$\sqrt{\eta}$ (velocity reduction factor)	≈ 0.15
η (energy reduction factor)	≈ 0.023 (~97.7% energy reduction)
Turbulence Intensity Reduction	~85% reduction in RMS turbulent velocity

The geometric design of the honeycomb flow straightener was selected based on recommendations reported in the literature. Several studies suggest that an optimum honeycomb length-to-diameter ratio (L/D) lies between 6 and 10, while most literature recommends a minimum ratio of $L/D > 5$. Many researchers have selected L/D ratios higher than range of 6–10. For example, Lumley [10] selected an L/D ratio of 36.

However, the final dimensions of the honeycomb must satisfy the flow development requirements within each cell. According to the flow-development criterion presented by

Lumley [10], fully developed flow inside honeycomb cells can only be achieved when the operating point lies within the region above and to the right of the critical boundary shown in Figure 3.3.

This criterion is applicable for cell-diameter Reynolds numbers (Re_D) greater than 2000. To ensure operation within the fully developed turbulent-flow regime, the honeycomb length was selected while maintaining a cell Reynolds number on the order of 10^5 . A length of $L = 50$ cm was selected, resulting in a length-to-diameter ratio of $L/D = 50$. This configuration provides sufficient flow-development distance within each cell. Consequently, the selected honeycomb geometry is expected to effectively suppress large-scale flow disturbances and deliver a more uniform velocity profile at the test section.

Settling chamber design

In hydrodynamic tunnel design, honeycombs break down turbulent eddies and remove swirl, but each cell generates small wakes and shear layers that leave the flow slightly turbulent. The settling chamber, positioned downstream of the honeycomb, allows these residual disturbances to decay naturally before reaching the contraction cone and test section. Without adequate settling length, residual eddies entering the contraction are amplified by accelerating flow, causing flow separation, increased turbulence intensity, and compromised experimental results. The settling chamber is therefore essential for achieving uniform, low-turbulence flow in the test section.

Design Criteria and Sizing

The primary design parameter governing the settling chamber is its length, which is directly linked to the honeycomb cell diameter. Honeycomb specifications require that the honeycomb must terminate 30 to 40 cell diameters upstream of the contraction cone entrance. For the current design, a honeycomb cell diameter (D) is 10 mm. Applying the 30 to 40 cell diameter rule gives,

- Minimum settling length: $30 \times 10 \text{ mm} = 300 \text{ mm}$

The settling chamber maintains a constant rectangular cross-section of $45 \text{ cm} \times 15 \text{ cm}$, matching the honeycomb outlet and contraction inlet to prevent sudden area changes. As flow exits the honeycomb, three simultaneous processes occur within the chamber: turbulence decays through viscous dissipation, the velocity profile becomes uniform, and residual swirl attenuates. Turbulent cell flow is preferred as it produces a flatter velocity

profile, accelerating the decay process. Together with the honeycomb, the settling chamber forms the flow conditioning assembly, ensuring reliable, low-turbulence flow reaches the test section for accurate experimental measurements.

Contraction Section

The contraction section accelerates flow from the settling chamber cross-section to the test section, while suppressing upstream turbulence through streamwise flow acceleration. The design followed the methodology established by Bell and Mehta [1] and validated in published water tunnel designs [3], [2].

Contraction Geometry

The contraction inlet dimensions were determined by the upstream settling chamber geometry: width $W_{in} = 0.45$ m, height $H_{in} = 0.15$ m, giving an inlet area:

$$A_{in} = W_{in} \times H_{in} = 0.45 \times 0.15 = 0.0675 \text{ m}^2 \quad (14)$$

The test section exit dimensions are 0.15×0.15 m, giving:

$$A_{ts} = 0.15 \times 0.15 = 0.0225 \text{ m}^2$$

The resulting contraction ratio:

$$r_c = \frac{A_{in}}{A_{ts}} = \frac{0.0675}{0.0225} = 3 \quad (15)$$

This is a two-dimensional contraction - the width reduces from 0.45 m to 0.15 m while the height remains constant at 0.15 m. A contraction ratio of 3:1, while lower than the 6–10 range typically recommended for wind tunnels, is consistent with published water tunnel designs where heavier construction requirements and spatial constraints limit the achievable ratio [3]. Sargison et al. employed an identical contraction ratio of 3:1 in a recirculating water tunnel designed for boundary layer research, demonstrating acceptable flow uniformity at the test section inlet [3].

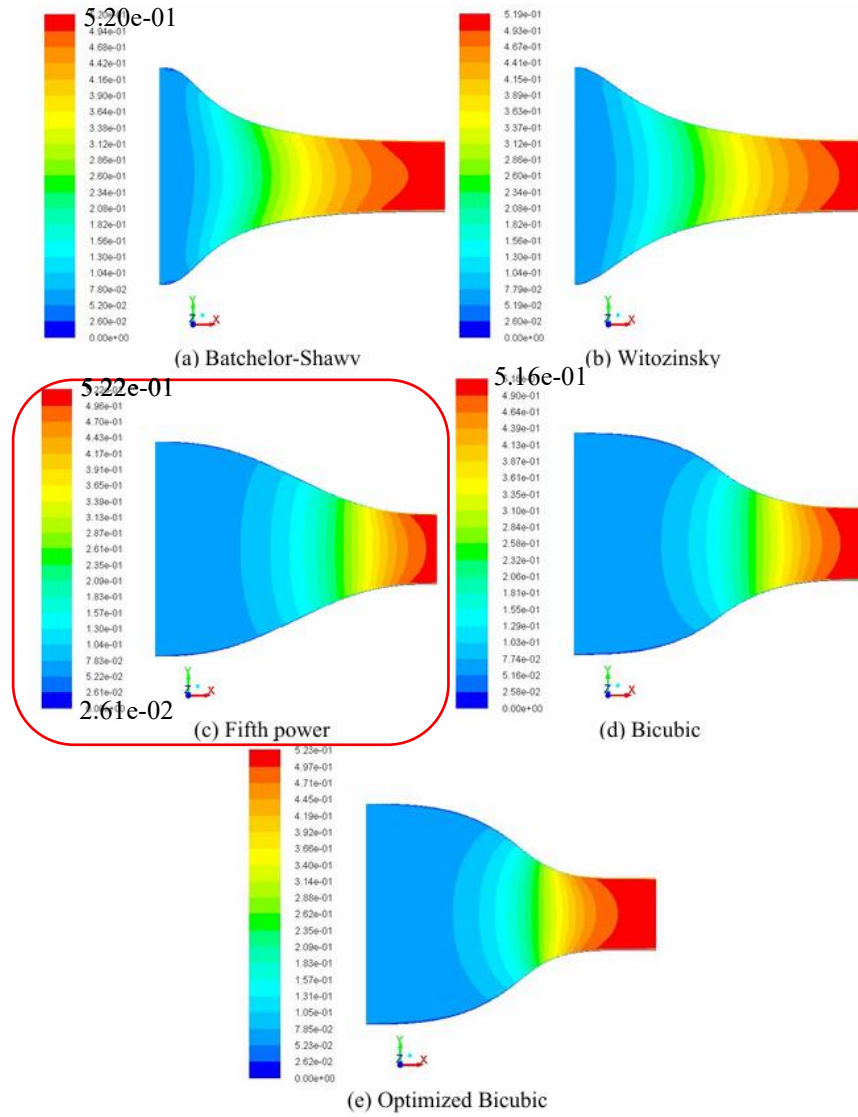


Figure 3.6: Bell-Mehta fifth-degree polynomial wall profile for the contraction section
Source: Y. Joang et al., 2018 [18]

Flow Velocities

From continuity:

$$U_{ts} = \frac{Q}{A_{ts}} = \frac{0.0136}{0.0225} = 0.604 \text{ m/s} \quad (16)$$

$$U_{in} = \frac{Q}{A_{in}} = \frac{0.0136}{0.0675} = 0.201 \text{ m/s} \quad (17)$$

The test section Reynolds number based on hydraulic diameter:

$$34 \quad (18)$$

$$Re_{ts} = \frac{U_{ts} \cdot D_h}{\nu} = \frac{0.604 \times 0.15}{1.0 \times 10^{-6}} \approx 90,600$$

For external flow over a cylinder of diameter $D = 13$ mm at maximum tunnel velocity:

$$Re_{cyl} = \frac{U_{ts} \cdot D}{\nu} = \frac{0.604 \times 0.013}{1.0 \times 10^{-6}} \approx 7,850$$

confirming the target Reynolds number range of 0–8,000 is achievable with the selected test section dimensions.

Contraction Length

The contraction length l was determined using the width-to-length ratio guidance of Bell and Mehta [1]:

$$0.667 \leq \frac{W_{in}}{l} \leq 1.79 \quad (20)$$

Taking $W_{in} = 0.45$ m and a width-to-length ratio of 1.0 for a compact geometry:

$$l = \frac{W_{in}}{1.0} = 0.45 \text{ m} \quad (21)$$

Contraction Wall Profile

Since the contraction operates only in the width direction, the Bell-Mehta fifth-degree polynomial was applied to the width profile [1]:

$$y(x) = H_i - (H_i - H_e) \left[6 \left(\frac{x}{l} \right)^5 - 15 \left(\frac{x}{l} \right)^4 + 10 \left(\frac{x}{l} \right)^3 \right] \quad (22)$$

where:

- $y(x)$ = local half-width at axial position x from inlet (m)
- H_i = inlet half-width = $0.45/2 = \mathbf{0.225 \text{ m}}$
- H_e = exit half-width = $0.15/2 = \mathbf{0.075 \text{ m}}$
- l = contraction length = $\mathbf{0.45 \text{ m}}$

This profile ensures zero wall slope and zero curvature at both inlet and exit, eliminating inflection-point-induced boundary layer separation [1], [2].

Pressure Drop Check

Applying Bernoulli's equation between contraction inlet (1) and test section exit (2), neglecting minor losses for a smooth contraction:

$$\Delta p = \frac{1}{2} \rho (U_{ts}^2 - U_{in}^2) = \frac{1}{2} \times 1000 \times (0.604^2 - 0.201^2) \approx 162 \text{ Pa} \quad (23)$$

This pressure drop is small relative to the available pump head and does not represent a significant energy demand on the system.

The finalized contraction section parameters are summarized in Table 3.5.

Table 3-5: Finalized contraction section design parameters

Parameter	Value
Inlet dimensions	0.45 m (W) × 0.15 m (H)
Exit dimensions	0.15 m × 0.15 m
Inlet area A_{in}	0.0675 m ²
Exit area A_{ts}	0.0225 m ²
Contraction ratio r_c	3
Contraction length l	0.45 m
Wall profile	Bell-Mehta 5th-degree polynomial
Inlet half-width H_i	0.225 m
Exit half-width H_e	0.075 m
Inlet velocity U_{in}	0.201 m/s
Exit velocity U_{ts}	0.604 m/s
Static pressure drop Δp	~162 Pa

Interconnecting Pipeline Selection

The interconnecting pipelines link the primary structural components of the tunnel circuit. Their design was governed by three criteria: maintaining acceptable flow velocity, minimizing head loss, and compatibility with commercially available PVC pipe sizes.

The mean flow velocity in a circular pipe of diameter d is:

$$U_{pipe} = \frac{4Q}{\pi d^2} \quad (24)$$

The Darcy-Weisbach equation gives head loss per unit length:

$$\frac{h_f}{L} = \frac{f \cdot U_{pipe}^2}{2gd} \quad (25)$$

where f is the Darcy friction factor from the Colebrook-White equation. Three standard PVC pipe diameters were evaluated as shown in Table 3.6.

Table 3-6: Head loss evaluation for candidate pipe diameters

Diameter (mm)	U_{pipe} (m/s)	Re	$h_f /$ L (m/m)	Verdict
50	6.92	346,000	1.18	✗ Excessive velocity and loss
75	3.07	230,000	0.144	✓ Selected
100	1.73	173,000	0.033	✗ Unnecessary bulk and cost

A diameter of **75 mm** standard uPVC pipe was selected, providing moderate flow velocity, manageable head loss, and availability through local suppliers. The Reynolds number in the pipe:

$$Re = \frac{U_{pipe} \cdot d}{\nu} = \frac{3.07 \times 0.075}{1.0 \times 10^{-6}} \approx 2.3 \times 10^5 \quad (26)$$

confirms fully turbulent flow, consistent with the Darcy-Weisbach friction factor assumption [8].

Table 3-7: Selected pipeline specifications

Parameter	Value
Selected diameter	75 mm
Material	Standard uPVC
Flow velocity	3.07 m/s
Reynolds number	$\sim 2.3 \times 10^5$
Head loss per meter	0.144 m/m

3.2.3 Head Loss Analysis

A systematic head loss analysis was carried out to determine the total hydraulic resistance of the tunnel circuit and verify that the available pump head is sufficient to sustain the design flow rate of $Q = 0.0136 \text{ m}^3/\text{s}$. The analysis was first performed manually using established fluid mechanics equations, then implemented in a MATLAB model to enable rapid parametric evaluation during the component design iterations.

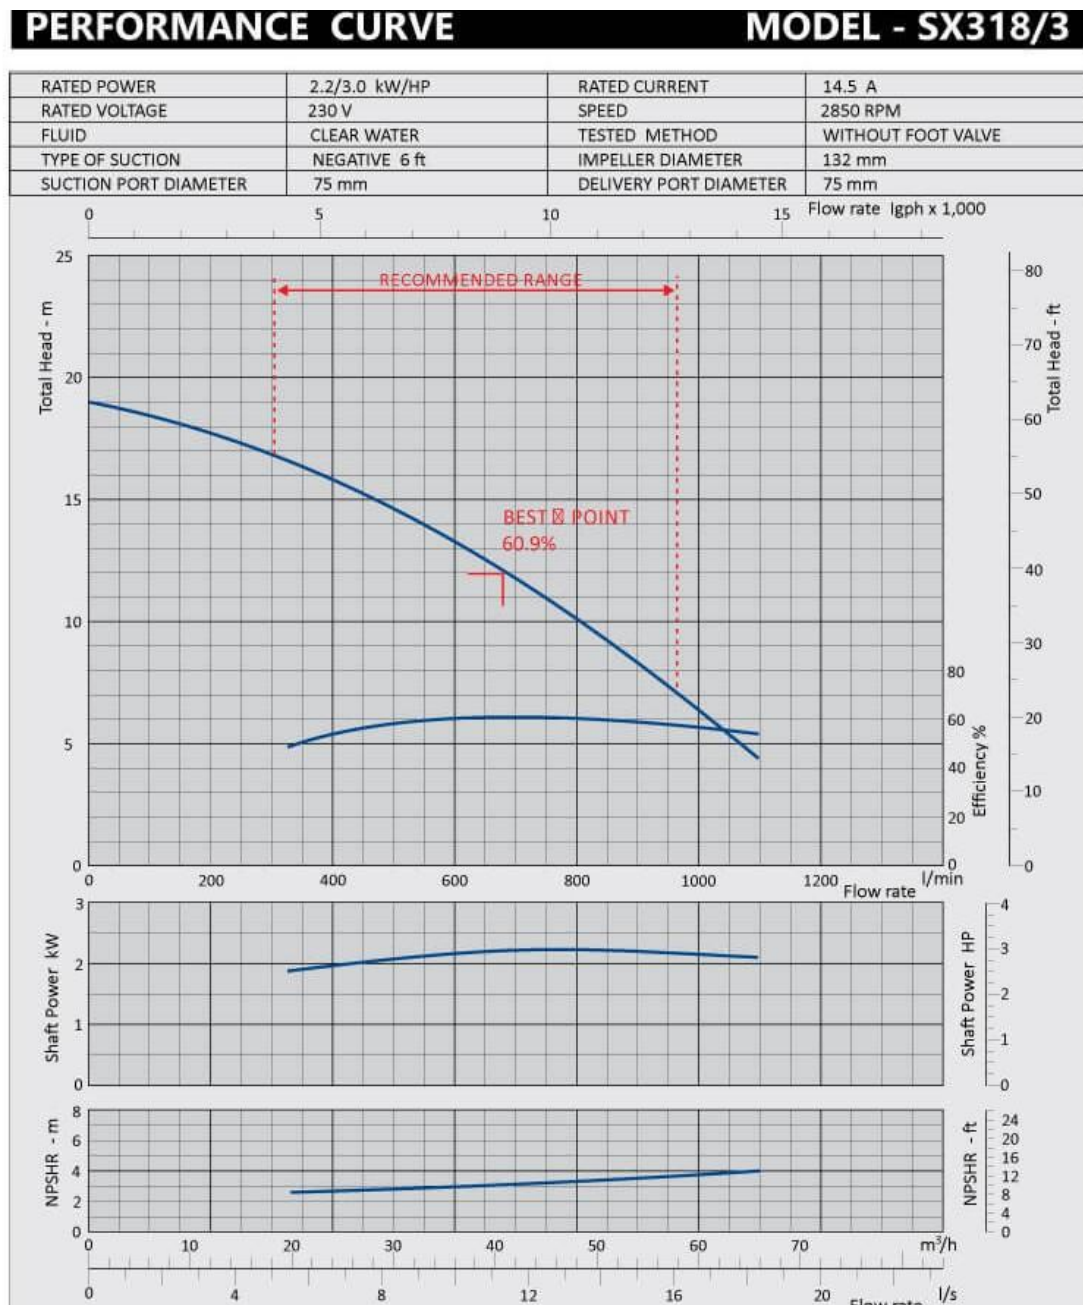


Figure 3.7: Pump characteristic curve

Head Loss

The total head loss around the circuit H_{total} is the sum of major losses h_f due to friction in straight pipe sections, and minor losses h_m due to flow through individual components:

$$H_{total} = \sum h_f + \sum h_m \quad (27)$$

Major Losses

Major losses in straight pipe and duct sections were calculated using the Darcy-Weisbach equation:

$$h_f = f \cdot \frac{L}{D_h} \cdot \frac{U^2}{2g} \quad (28)$$

where f is the Darcy friction factor, L is the section length, D_h is the hydraulic diameter, and U is the mean flow velocity. For turbulent flow in smooth-walled PVC pipes, f was obtained from the explicit Swamee-Jain approximation to the Colebrook-White equation [8]:

$$f = \frac{0.25}{\left[\log_{10} \left(\frac{\varepsilon}{3.7D_h} + \frac{5.74}{Re^{0.9}} \right) \right]^2} \quad (29)$$

where ε is the pipe roughness height (taken as $\varepsilon = 0.0015$ mm for smooth uPVC).

Minor Losses

Minor losses for each tunnel component were expressed using the dimensionless loss coefficient K :

$$h_m = K \cdot \frac{U^2}{2g} \quad (30)$$

where U is the mean flow velocity at the component inlet. Loss coefficients were obtained from established empirical correlations and component-specific design guidelines as summarized in Table 3.8.

Table 3-8: Loss coefficients for tunnel circuit components

Component	Loss Coefficient (K)	Reference
90° cascade bend with vanes	0.10 – 0.20	[2]
Wide-angle diffuser (49°, 6 vanes)	0.30 – 0.40	[3]
Vertical diffuser (7° half-angle)	0.15 – 0.25	[1]
Contraction section	0.04	[4]
Honeycomb structure	0.40 – 0.80	[5]
Wire mesh screen	0.20 – 0.40	[5]
Square-round transition	0.05	[1]
PVC pipe sections	Darcy-Weisbach	[1]

Total System Head Loss

Applying the loss framework around the complete tunnel circuit, the total head loss was expressed as:

$$H_{total} = \sum_{i=1}^n K_i \cdot \frac{U_i^2}{2g} + \sum_{j=1}^m f_j \cdot \frac{L_j}{D_{h,j}} \cdot \frac{U_j^2}{2g} \quad (31)$$

where subscripts i and j denote individual minor loss components and pipe sections respectively. All velocities U_i were computed from continuity at each cross-section using $Q = 0.0136 \text{ m}^3/\text{s}$.

Pump Adequacy Check

The required pump head H_{pump} must satisfy:

$$H_{pump} \geq H_{total} + \Delta z \quad (32)$$

where, $H_{pump} = 30 \text{ feet}$, Δz is the static head difference between the pump inlet and outlet due to the vertical tunnel geometry. The available pump head was obtained from the pump characteristic curve supplied with the procured pump.

MATLAB Model

A MATLAB-based head loss model was developed to automate the calculation across all components and enable sensitivity analysis during design iteration. The model accepts component dimensions as inputs, computes the flow velocity at each cross-section from continuity, evaluates major and minor losses for each element, and outputs the total circuit head loss alongside a component-by-component breakdown. This allowed the influence of individual design parameters - such as pipe diameter, diffuser angle, and honeycomb dimensions - to be assessed rapidly without manual recalculation.

The structure of the MATLAB model is illustrated in Figure below, and the full model code is provided in Appendix B.

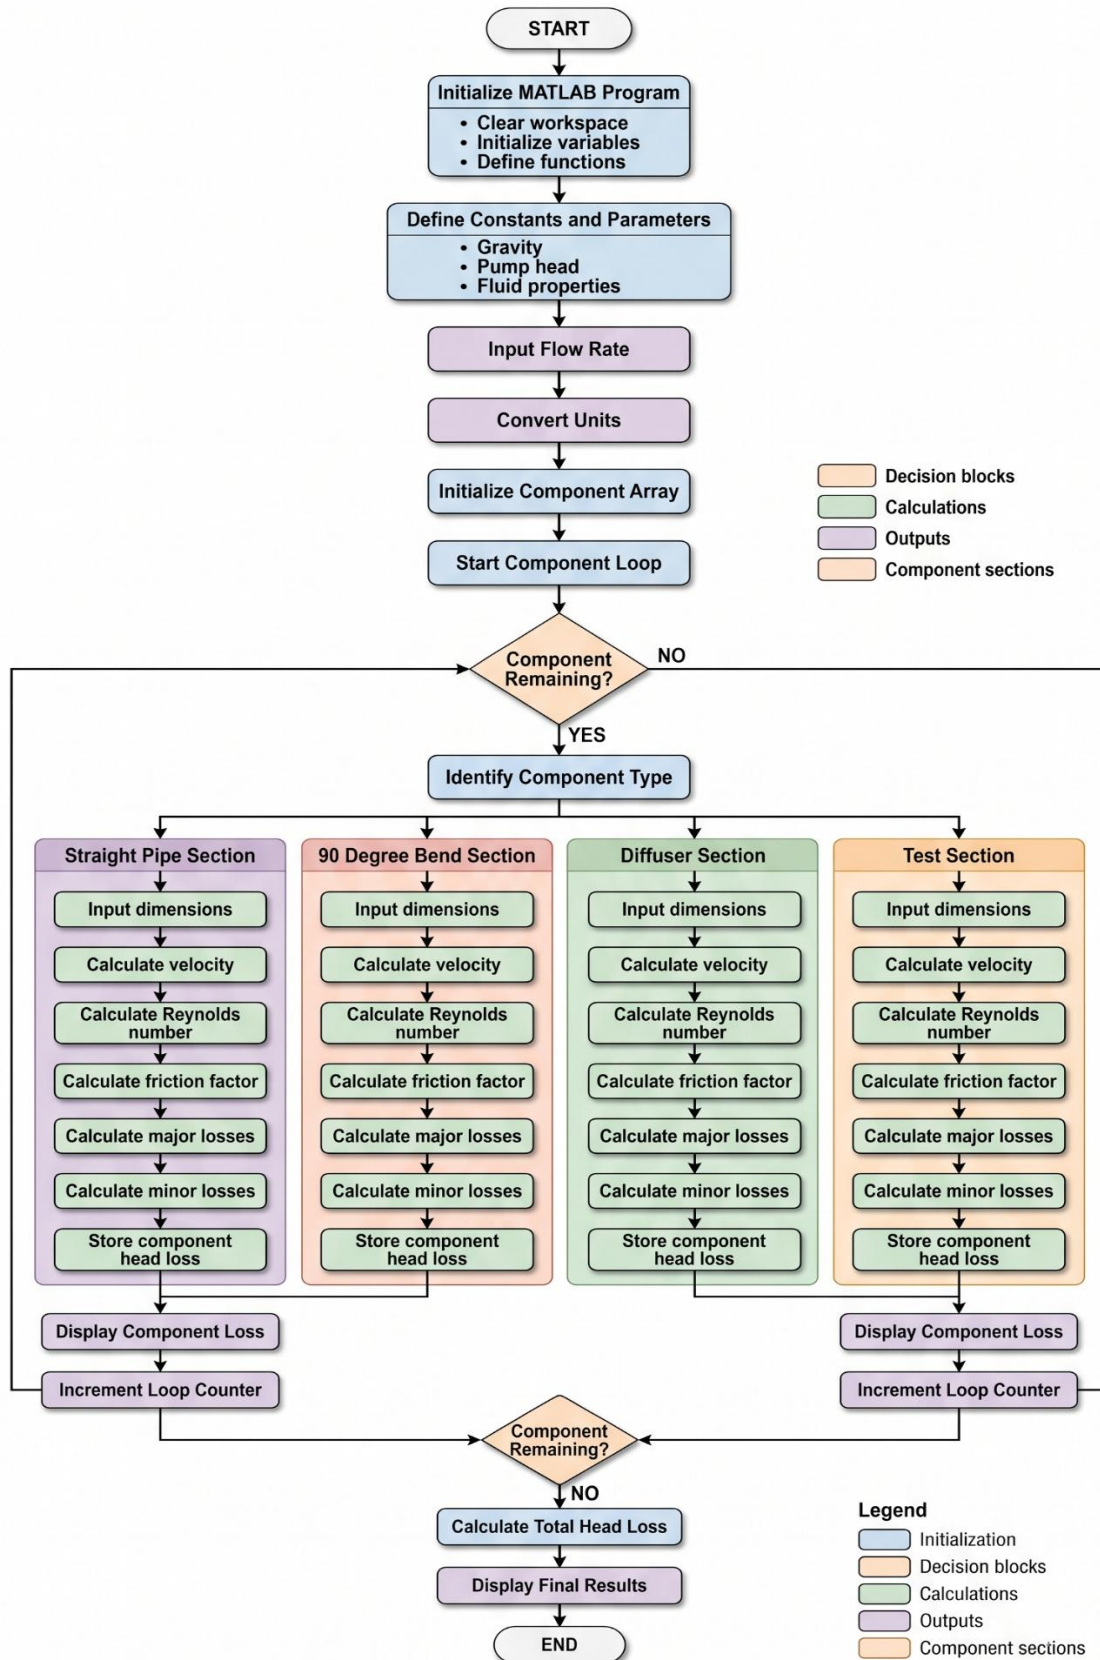



Figure 3.8: Flowchart of the MATLAB head loss model

3.2.4 Flow Visualization Implementation

Flow visualization using the hydrogen bubble technique was selected and integrated into the test section design during the initial design phase. The selection of this method over the more commonly used dye injection approach was driven by a fundamental constraint of closed-loop tunnel operation: dye injected into the circuit accumulates with repeated experimental runs, progressively contaminating the water and degrading flow quality. The hydrogen bubble method avoids this problem entirely, as the bubbles are generated in-situ and dissolve downstream without leaving any residual contamination [17].

Operating Principle

Hydrogen bubbles are generated by electrolysis using a thin stainless steel wire stretched across the flow direction in the test section. The wire acts as the cathode (negative electrode) in a DC electrical circuit, with the tunnel structure or a separate electrode serving as the anode. When current is applied, water molecules at the wire surface dissociate according to:



producing a continuous stream of small hydrogen bubbles that are carried downstream by the flow, making the velocity field directly visible [[17].

Wire Specifications and Placement

The wire diameter is a critical parameter - finer wires produce smaller, more uniform bubbles that follow the flow more faithfully. A wire diameter in the range of 25–50 μm is recommended for low Reynolds number applications [17]. The wire was positioned transversely across the full width of the test section, upstream of the cylinder model location, to generate a uniform bubble sheet that reveals the approaching flow structure and its subsequent development around the model.

Electrical Circuit

The circuit consists of a DC power supply, the cathode wire, and a return electrode. Applied voltage and current are adjusted to control bubble generation rate and density. Typical operating parameters for water tunnel hydrogen bubble systems are in the range of 10–50 V DC, with current adjusted to produce a visible but non-disruptive bubble density [17].

Imaging Setup

Adequate backlighting or side-lighting is required to make the bubble sheet visible against the test section background. A high-contrast background and LED lighting directed perpendicular to the bubble sheet provides sufficient visibility for qualitative flow pattern observation and photographic recording.

The integration of the hydrogen bubble system into the test section is illustrated in Figure 3.4.

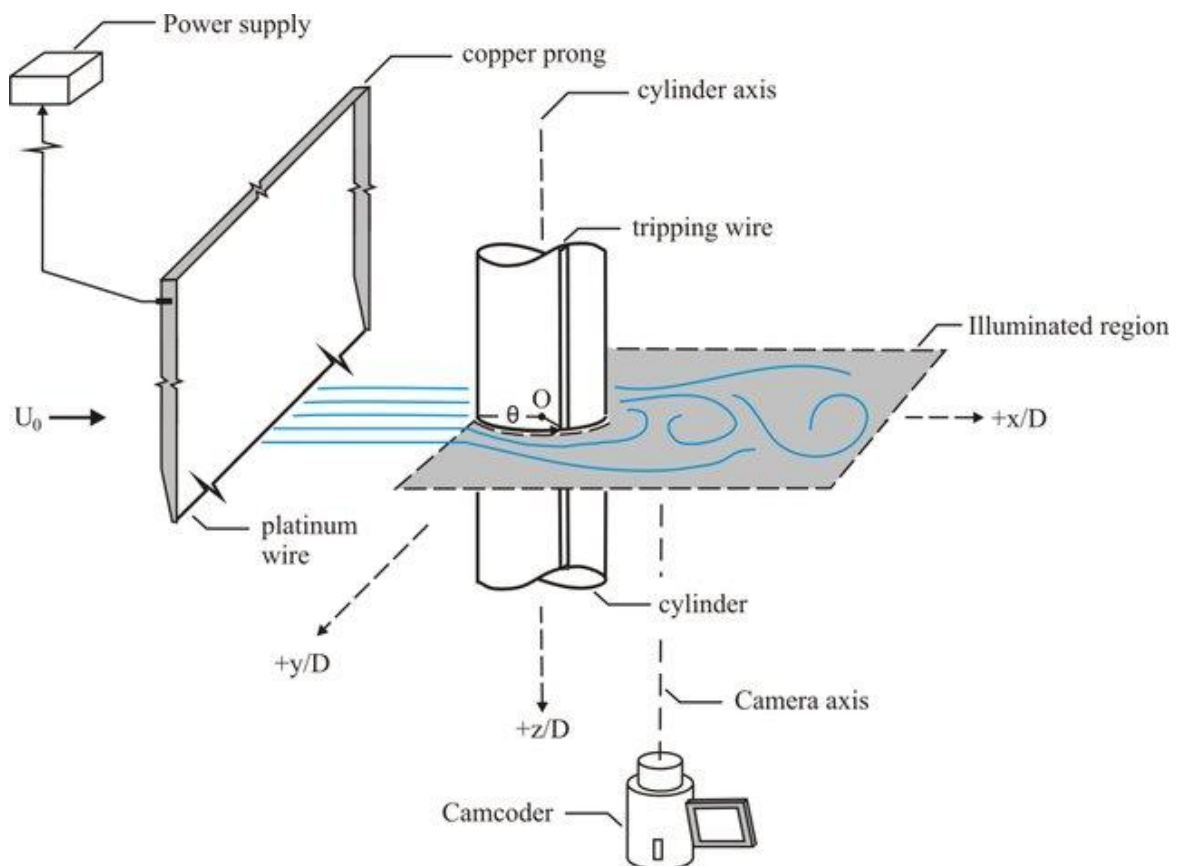


Figure 3.9: A representative schematic of the experimental setup employing the hydrogen bubble flow visualization system. The cylinder/wire and the platinum wire holder

4 Chapter 4 – Simulation, Optimization and detailed design

4.1 CFD Analysis Approach

4.1.1 Simulation Objectives and Scope

Role of Simulation in the Design Process

The hydrodynamic tunnel was designed primarily on the basis of established theoretical principles, empirical correlations, and guidance drawn from relevant literature. While this approach provided a well-founded starting geometry, it inherently involves simplifications that may not fully capture the complex three-dimensional flow behavior within the tunnel. CFD simulation was therefore employed as a complementary tool to validate the design and investigate specific flow phenomena that analytical methods alone could not adequately resolve.

The primary objective of the CFD analysis was to assess the internal flow characteristics of the critical components, specifically the wide-angle diffuser, the 90° bend, the settling chamber, the contraction section, and the test section. A key motivation was the known susceptibility of wide-angle diffusers to flow separation, which leads to reduced pressure recovery efficiency, increased turbulence intensity, and non-uniform velocity distributions downstream. The CFD analysis was therefore used to confirm the presence and extent of this separation and to evaluate design modifications, particularly the introduction of splitter vanes within the diffuser.

In summary, simulation served three distinct roles: as a validation tool to verify component performance, as a diagnostic tool to identify flow deficiencies, and as an optimization platform to guide design improvements prior to physical construction.

Scope and Limitations of the Simulation

The simulation domain encompasses the key flow-conditioning components of the tunnel: the vertical diffuser, 90° bend, wide-angle diffuser, settling chamber, contraction section, and test section. Two notable simplifications were made relative to the physical tunnel. First, the recirculation pump was excluded from the domain, with a uniform velocity inlet boundary condition applied instead to represent the flow delivered by the pump. Second, the honeycomb flow straightener was not included, as resolving its individual cells would result in an excessively large mesh and prohibitive computational cost. Despite these

simplifications, the simulation domain and boundary conditions are considered sufficiently representative to fulfil the primary objectives of validation and diffuser optimization.

4.1.2 Computational Fluid Dynamics (CFD) Methodology - Governing Equations and Turbulence Modelling

Selection of CFD Approach and Software

ANSYS Fluent was selected as the CFD solver for this study due to its widespread use in engineering applications and its well-validated turbulence modelling capabilities. The SST $k-\omega$ turbulence model was adopted for all simulations, as it is well suited for flows involving adverse pressure gradients, boundary layer separation, and recirculation zones, all of which are characteristic of flow through a wide-angle diffuser. Water was treated as an incompressible, Newtonian fluid with constant properties at ambient temperature, which is appropriate as the working fluid remains entirely in the liquid phase during normal tunnel operation.

Governing Equations

The fluid flow through the hydrodynamic tunnel components was modelled by solving the Reynolds-Averaged Navier-Stokes (RANS) equations, which govern the conservation of mass and momentum for incompressible, viscous flows.

Continuity Equation (Conservation of Mass):

$$\frac{\partial U_i}{\partial x_i} = 0 \quad (34)$$

where U_i represents the time-averaged velocity component in the i -th coordinate direction, and x_i denotes the corresponding spatial coordinate. This enforces the incompressibility condition, valid for liquid water at the velocities encountered in this study.

RANS Momentum Equation:

$$\rho \left(U_j \frac{\partial U_i}{\partial x_j} \right) = -\frac{\partial P}{\partial x_i} + \frac{\partial}{\partial x_j} \left[\mu \left(\frac{\partial U_i}{\partial x_j} + \frac{\partial U_j}{\partial x_i} \right) - \rho \overline{u'_i u'_j} \right] \quad (35)$$

where ρ is the fluid density, P is the mean static pressure, μ is the dynamic viscosity, and $-\rho \bar{u_i' u_j'}$ is the Reynolds stress tensor, accounting for the effect of turbulent velocity fluctuations on the mean flow.

Fluid Properties:

Water was treated as incompressible and Newtonian with constant properties at $\sim 20^\circ\text{C}$:

- $\rho = 998.2 \text{ kg/m}^3$
- $\mu = 1.003 \times 10^{-3} \text{ Pas.}$

The RANS approach was selected over LES or DNS, providing an appropriate balance between computational cost and accuracy for the engineering flow configurations in this study.

Turbulence Modelling - SST k – ω

The SST k- ω (Shear Stress Transport) turbulence model, originally developed by Menter [14], was selected for all simulations in this study. The model solves two additional transport equations - one for the turbulent kinetic energy k , and one for the specific dissipation rate ω - which together provide the turbulent (eddy) viscosity μ_t required to close the RANS equations.

Transport Equations:

$$\frac{\partial(\rho k)}{\partial t} + \frac{\partial(\rho U_j k)}{\partial x_j} = P_k - \beta^* \rho \omega k + \frac{\partial}{\partial x_j} \left[(\mu + \sigma_k \mu_t) \frac{\partial k}{\partial x_j} \right] \quad (36)$$

Where;

k = Turbulent kinetic energy

P_k = Production of turbulent kinetic energy

β^* = Closure coefficient for dissipation term

ω = Specific dissipation rate

σ_k = Turbulent Prandtl number for k

μ_t = Turbulent (eddy) viscosity

$$\frac{\partial(\rho\omega)}{\partial t} + \frac{\partial(\rho U_j \omega)}{\partial x_j} = \frac{\gamma \rho}{\mu_t} P_k - \beta \rho \omega^2 + \frac{\partial}{\partial x_j} \left[(\mu + \sigma_\omega \mu_t) \frac{\partial \omega}{\partial x_j} \right] + 2(1 - F_1) \frac{\rho \sigma_{\omega 2}}{\omega} \frac{\partial k}{\partial x_j} \frac{\partial \omega}{\partial x_j} \quad (37)$$

Where;

γ = Closure coefficient (production term in ω equation)

β = Closure coefficient for ω destruction term (*note: different from β^**)

σ_ω = Turbulent Prandtl number for ω

$\sigma_{\omega 2}$ = Cross-diffusion coefficient constant

F_1 = Blending function (*mentioned later in text but never formally defined here*)

Why SST k- ω was selected:

The SST k- ω model was chosen over alternative RANS models such as the standard k- ϵ or realizable k- ϵ for two principal reasons. First, the standard k- ϵ model is known to perform poorly in flows with strong adverse pressure gradients and boundary layer separation, which are the dominant flow features in the wide-angle diffuser. Second, the SST formulation improves upon the standard k- ω model by eliminating its sensitivity to free-stream turbulence boundary conditions, achieved through the blending function F_1 . The SST k- ω model is therefore well suited to the mixed flow regime present in this study attached boundary layers in the contraction and test section, and separated, recirculating flow in the diffuser.

4.1.3 Computational Domain, Boundary Conditions and Solver Settings

A transient simulation was performed for the wide-angle diffuser without vanes to capture the unsteady flow behavior within the diffuser. The transient approach was adopted as flow separation in a wide-angle diffuser is inherently unsteady in nature, the separated shear layers and recirculation zones fluctuate over time, and a steady-state RANS solution would not adequately represent this behavior. The transient simulation therefore resolves the time-dependent evolution of the separated flow, providing a physically representative picture of the flow field within the wide-angle diffuser.

Transient Simulation Settings:

The transient simulation used the PISO (Pressure-Implicit with Splitting of Operators) pressure-velocity coupling scheme, which is well suited to time-dependent flow problems due to its predictor-corrector structure and efficient handling of transient terms. The simulation was conducted in two phases of time stepping to balance accuracy and computational efficiency. In the initial phase, a fixed time step of $\Delta t = 0.001$ s was employed for the first 4 seconds of physical time to accurately capture the early transient development of the flow. Subsequently, due to computational resource limitations, the time step was increased to $\Delta t = 0.01$ s for the remaining simulation duration, with a maximum of 40 iterations per time step to ensure sufficient convergence within each time increment.

The Courant-Friedrichs-Lewy (CFL) condition was used to assess the temporal resolution of the simulation, defined as:

$$CFL = \frac{V \times \Delta t}{\Delta x} \quad (38)$$

where V is the local flow velocity (m/s), Δt is the time step size (s), and Δx is the local cell size (m), approximated here as the cube root of the cell volume:

$$\Delta x = V_{cell}^{1/3} \quad (39)$$

Based on the maximum flow velocity of 3 m/s and minimum cell size of 4×10^{-4} m, the maximum CFL number was approximately **7.5** during the initial phase ($\Delta t = 0.001$ s) and approximately **75** during the second phase ($\Delta t = 0.01$ s), both within the acceptable range for the implicit PISO scheme. The simulation was run for a total physical time of 15 seconds, with convergence within each time step assessed using a normalized residual criterion of 10^{-3} for all solved variables, including velocity components, pressure, and turbulence quantities. Data sampling for time-averaged statistics was enabled throughout the simulation, with a total sampled time of approximately 15 s.

Simulation Domain Definition and Boundary Conditions

Computational Domain and Geometry

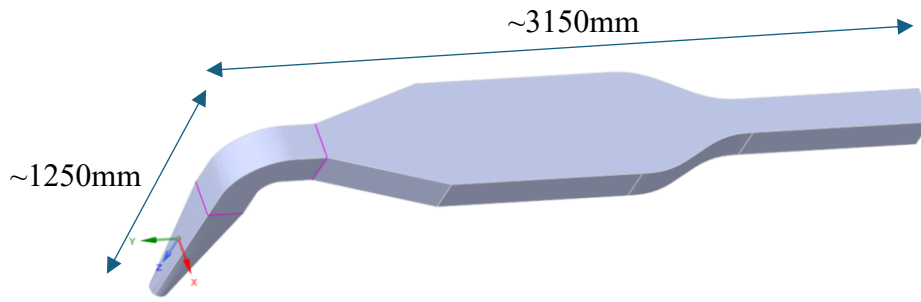


Figure 4.1 - Fluid domain

The computational domain includes the vertical transition diffuser, the 90° bend wide-angle diffuser, the settling chamber, the contraction section, and the test section. The honeycomb flow straightener was excluded from the domain as discussed in later sections.

Boundary Condition Setup

The boundary conditions were defined consistently across both simulations at the inlet, with differences applied at the outlet to suit the objectives of each simulation approach.

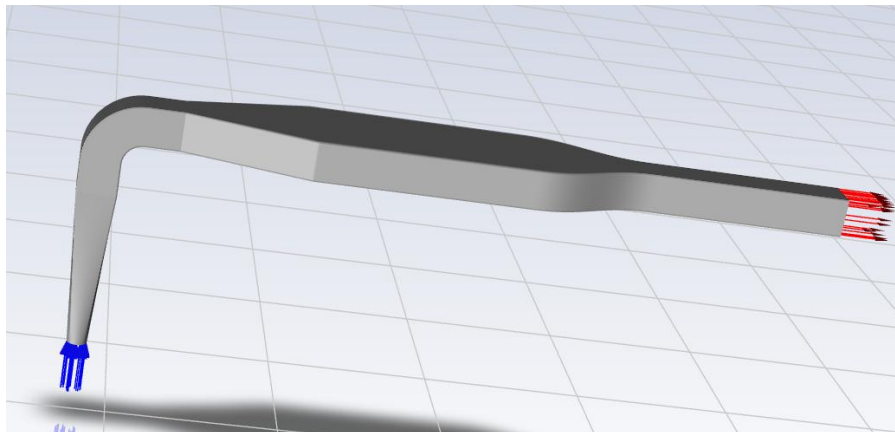


Figure 4.2 - Boundary condition setup

Inlet: A velocity inlet boundary condition was applied at the vertical transition diffuser inlet for both simulations, with a uniform inlet velocity of 3 m/s and turbulence intensity of 8%.

Outlet : A pressure outlet boundary condition was applied at the test section outlet for the transient simulation, with a gauge pressure of 0 Pa specified at the outlet plane. This condition is more appropriate for time-dependent simulations, allowing pressure fluctuations associated with unsteady flow separation to be naturally accommodated at the domain exit.

Walls: A no-slip boundary condition was applied to all solid wall surfaces in both simulations, enforcing zero velocity at the wall and allowing the boundary layer to develop naturally within the mesh resolution provided.

4.1.4 Mesh Generation and Quality Assessment

Mesh Generation Strategy

A structured hexahedral mesh was generated for the computational domain, consisting of **1,743,532 elements** and **1,787,422 nodes**. Hexahedral elements were selected due to their superior alignment with the flow direction and reduced numerical diffusion compared to tetrahedral alternatives.

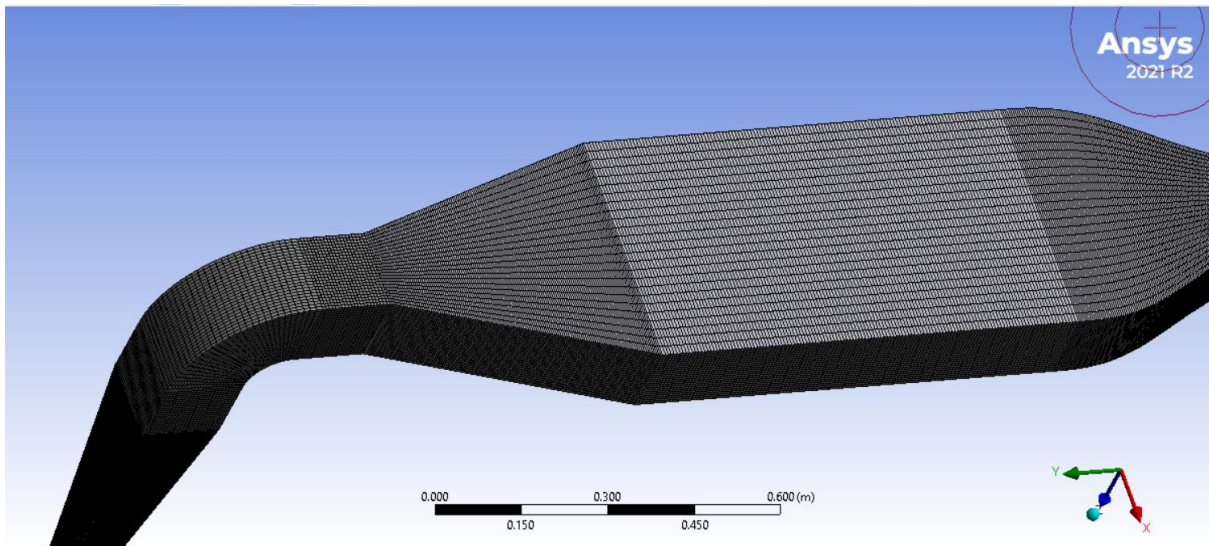


Figure 4.3 - Mesh

Mesh Quality analysis

The mesh quality was assessed using skewness and orthogonal quality metrics. The skewness of the majority of elements falls within the 0.00–0.06 range with no elements exceeding 0.80, and orthogonal quality peaks in the 0.95–1.00 range, confirming the mesh is of acceptable quality for the intended simulations.

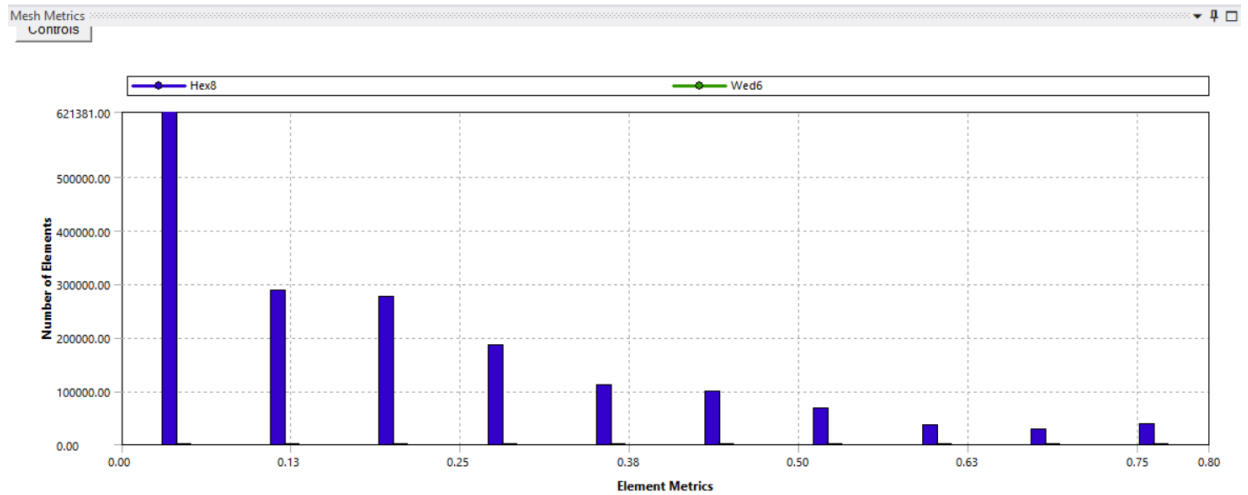


Figure 4.4 – Skewness

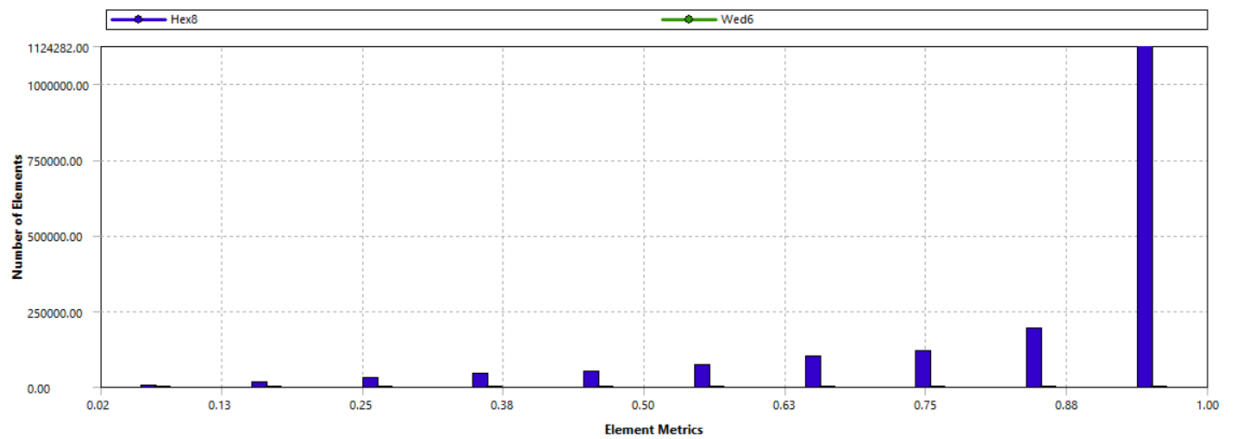


Figure 4.5 - Orthogonal quality

Near wall Treatment

Inflation layers were applied to all solid wall boundaries using the sweep and inflation method to resolve the viscous sublayer accurately. A first layer height of 5×10^{-5} m was specified, with 15 inflation layers and a growth rate of 1.2. This configuration ensures adequate near-wall mesh resolution consistent with the $y^+ \approx 1$ requirement of the SST k- ω turbulence model.

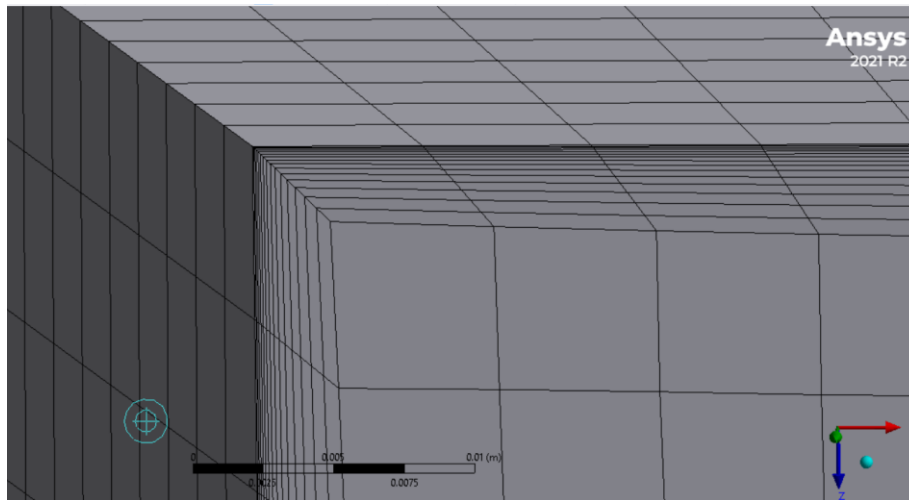


Figure 4.6 - Near wall treatment

Post-simulation inspection of the facet-average y^+ values confirmed values of 0.841, 0.897, and 1.136 across the principal wall boundaries, validating that the viscous sublayer was fully resolved throughout the domain.

4.2 Structural Analysis (FEA) Approach

4.2.1 Overview of Structural Analysis Methodology

Finite Element Analysis (FEA) was carried out using Abaqus/Standard to evaluate the structural adequacy of the glass fiber reinforced polymer (GFRP) components under internal water pressure loading. Three components were selected for analysis based on their large surface area and susceptibility to outward deflection under hydrostatic pressure: the contraction section, the wide-angle diffuser, and the settling chamber. The primary objective of the analysis was to determine whether the as-fabricated 3 mm GFRP wall thickness alone was sufficient to withstand the internal pressure without exceeding the material's tensile strength. The analysis was conducted in two stages a baseline simulation of the unreinforced shell, followed by a reinforced simulation incorporating external ribs to quantify the structural improvement achieved through reinforcement. Results of both stages are presented in Chapter 5.

4.2.2 Material Properties and Assumptions

All three components were fabricated using a hand-layup GFRP process with a total laminate of three layers: one layer of 300 GSM woven glass fiber fabric and two layers of 450 GSM

woven glass fiber fabric, consolidated with polyester resin to a nominal wall thickness of 3 mm. The material was modelled as a linear elastic, homogeneous, and isotropic solid - a reasonable approximation for a balanced woven laminate under static loading conditions [21]. The material properties used in Abaqus, defined in the mm-tone-second (MTS) unit system, are given in Table 4.1.

Table 4-1: GFRP material properties used in Abaqus FEA (MTS unit system)

Property	Value	Unit
Density ρ	1.85×10^{-9}	tone/mm ³
Young's Modulus E	10,000	MPa
Poisson's Ratio ν	0.3	-
Tensile Strength σ_t	180	MPa
Wall Thickness t	3	mm

A tensile strength of 180 MPa was adopted based on published data for hand-layup GFRP laminates with similar fibre volume fractions of 35–40% [21], [3]. No failure criteria were explicitly defined within Abaqus; instead, the maximum Von Mises stress output from each simulation was compared against the tensile strength in the post-processing stage to assess structural adequacy.

4.2.3 Component Geometries and Element Type

The CAD geometry for each component was imported directly into Abaqus from the detailed design model. A mixed meshing strategy was adopted for all three components, using structured hexahedral elements on the regular wall regions and unstructured tetrahedral elements at the flange faces and geometrically complex transition regions where structured meshing was not feasible. The element types assigned to each region are summarized in Table 4.2.

Table 4-2: Element types assigned to each component in Abaqus

Component	Regular Wall Regions	Flange / Transition Regions
Contraction	C3D8R - 8-node linear brick, reduced integration	C3D10 - 10-node quadratic tetrahedron
Wide-angle diffuser	C3D20R - 20-node quadratic brick, reduced integration	C3D10 - 10-node quadratic tetrahedron

Settling chamber	C3D20R - 20-node quadratic brick, reduced integration	C3D10 - 10-node quadratic tetrahedron
------------------	---	---------------------------------------

The C3D8R element was selected for the contraction section wall regions due to the predominantly structured, regular geometry of the contracting surface. For the wide-angle diffuser and settling chamber, the higher-order C3D20R element was employed to better capture the stress gradients in these geometrically simpler but larger flat-panel regions, where bending-dominated deformation under pressure loading benefits from quadratic interpolation [22]. The C3D10 quadratic tetrahedral element was used consistently across all three components for the flange regions, providing accurate stress recovery at the constrained boundaries without requiring structured meshing. The meshes for all three components are shown in Figures 4.16, 4.17, and 4.18 respectively.

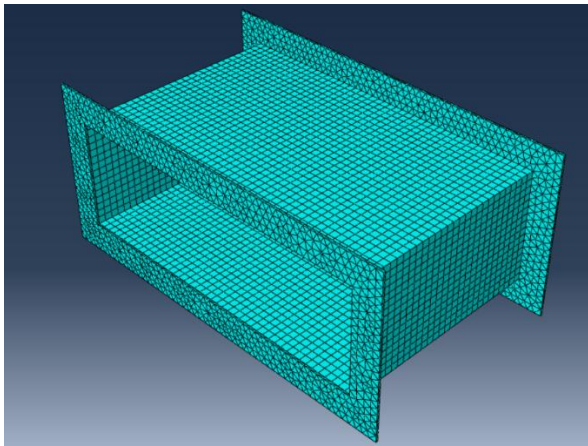


Figure 4.7: Abaqus mesh - settling chamber

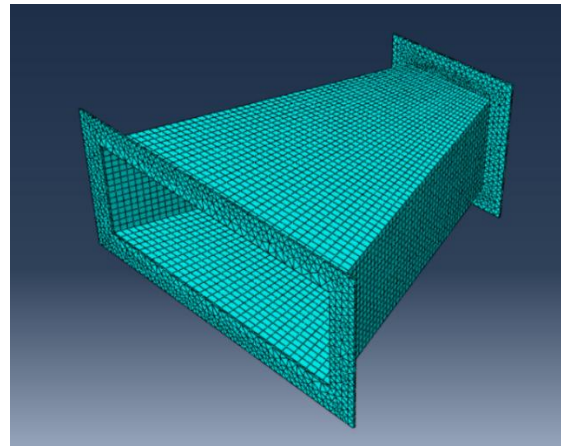


Figure 4.8: Abaqus mesh - wide angle diffuser

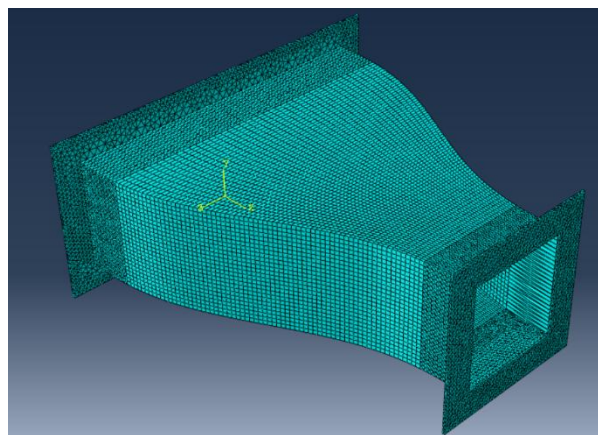


Figure 4.9: Abaqus mesh - contraction section

4.2.4 Boundary Conditions and Loading

Identical boundary conditions were applied to all three components, reflecting their physical installation condition within the tunnel circuit. Both the inlet and outlet flanges of each component were fully constrained in all three translational degrees of freedom ($U_1 = U_2 = U_3 = 0$), representing the rigid connection to adjacent tunnel components at each flange face. Rotational degrees of freedom (UR_1, UR_2, UR_3) were left unconstrained, consistent with a pinned-flange condition. A ramp amplitude was applied to both the boundary conditions and the pressure load to ensure numerical stability during the static solution. The boundary condition setup for settling chamber is shown in figure 4.19, which is similar to other two components as well.

A uniform internal pressure of **0.02 MPa (20 kPa)** was applied to all inner surfaces of each component, representing the hydrostatic pressure exerted by the internal water column. This value corresponds to a water column height of approximately 2 m, consistent with the worst-case hydrostatic head in the vertical tunnel circuit:

$$p = \rho gh = 1000 \times 9.81 \times 2.0 \approx 19,620 \text{ Pa} \approx 0.02 \text{ MPa}$$

It is acknowledged that the applied internal pressure of 0.02 MPa represents the hydrostatic contribution only and does not account for the additional pump-generated pressure head of approximately 0.088 MPa (equivalent to the ~9 m available pump head). However, preliminary physical assessment during fabrication indicated that the unreinforced fiberglass shell would be insufficient to withstand the total operating pressure under prolonged loading. To address this, circumferential structural ribs were added to each component and subsequently reinforced with an additional layer of fiberglass mat laminated over the rib surface, as shown in Figures 4.10. This reinforcement strategy was adopted as a practical mitigation measure given the fabrication constraints of the project, and a full pressure

analysis incorporating pump operating pressure is recommended as part of future structural validation work.



Figure 4.10: fiber components reinforced with ribs

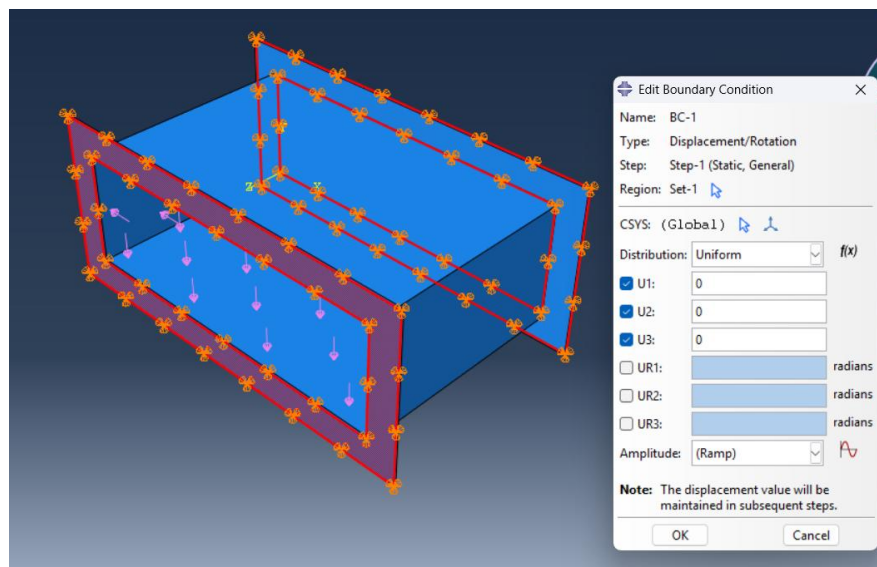


Figure 4.11: Boundary conditions - settling chamber (other components are also like this)

4.2.5 Analysis Procedure and Acceptance Criteria

All simulations were performed as Static, General steps in Abaqus/Standard, appropriate for linear elastic structural analysis under static pressure loading. The primary output quantities extracted from each simulation were:

- **Maximum Von Mises stress σ_{VM}** - used to assess the onset of yielding or failure
- **Maximum displacement U_{max}** - used to assess geometric distortion of the tunnel profile

The acceptance criterion for structural adequacy was defined as:

$$\sigma_{VM} \leq \frac{\sigma_t}{FoS} \quad (40)$$

where $\sigma_t = 180$ MPa is the tensile strength of the GFRP laminate and a factor of safety of $FoS = 3$ was applied, consistent with recommended practice for hand-layup composite structures subject to manufacturing variability [21]. This gives an allowable stress of:

$$\sigma_{allowable} = \frac{180}{3} = 60 \text{ MPa} \quad (41)$$

Where the baseline simulation indicated that σ_{VM} exceeded $\sigma_{allowable}$, external ribs were added to the component geometry and the simulation was repeated to verify that the reinforced design satisfied the acceptance criterion. The rib design and the results of both baseline and reinforced simulations for all three components are presented in Section 5.2.

4.3 Finalized Component Dimensions and Design Parameters

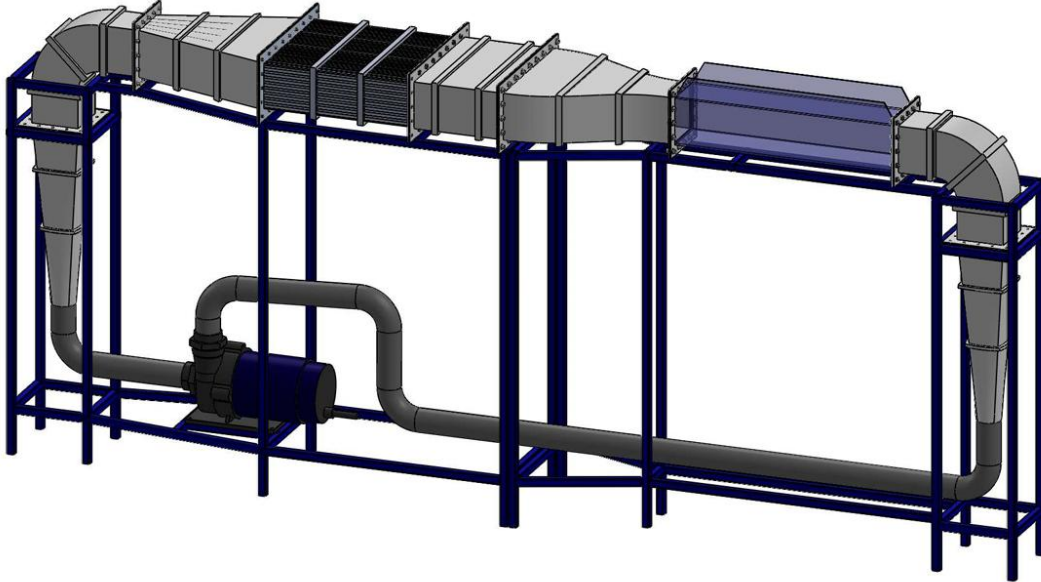


Figure 4.12: Complete CAD model of the Hydrodynamic tunnel

4.3.1 Vertical Transition section

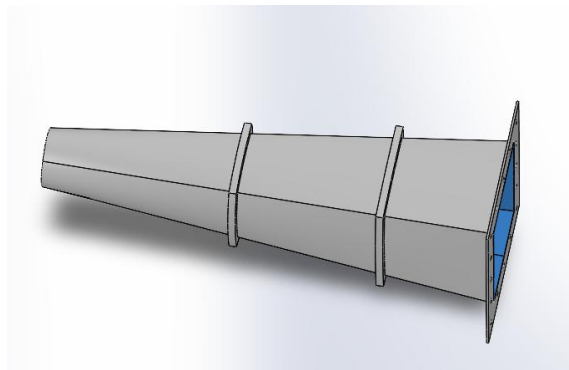


Figure 4.13: vertical transition section

The vertical transition section reduces pump-generated turbulence and compensates for gravitational pressure loss through pressure recovery. It's designed to gradually expand the flow from a circular inlet of 75 mm diameter to a square outlet of 150 mm × 150 mm while minimizing flow separation and pressure losses. The component was fabricated using GFRP hand layup with structural reinforcements to ensure smooth flow development and adequate rigidity.

Table 4-3: vertical transition section Detailed design parameters

Parameter	Value	Description
Geometry & Dimensions		
Overall length	613 mm	Along the central axis of the transition
Inlet diameter	75 mm	Circular cross-section at inlet
Outlet dimensions	150 mm × 150 mm	Square cross-section at outlet
Transition angle	7°	Total divergence angle
Material & Layup		
Material	GFRP	Woven glass fiber reinforced polymer
Layer 1	300 GSM × 1 layer	Inner surface layer for finish quality
Layers 2 & 3	450 GSM × 2 layers	Structural layers for load-bearing capacity

Resin system	Polyester resin	Compatible with hand layup process
Manufacturing Process		
Fabrication method	Hand layup	Manual wet layup of glass fiber plies
Mold type	Thin sheet metal mold	Forming surface for the transition geometry
Structural reinforcement	External wood frames	Outer wall reinforcement for added rigidity

4.3.2 Rectangular Bend

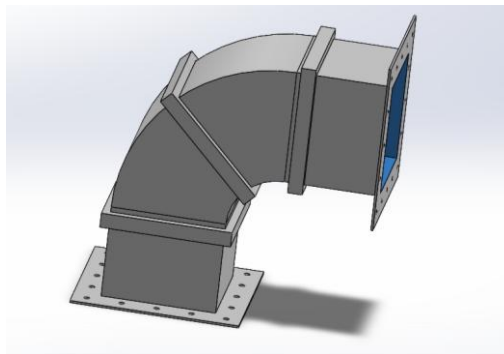


Figure 4.14: Rectangular 90-degree bend

The rectangular 90-degree bend is used to redirect the flow within the hydrodynamic tunnel while maintaining a consistent square cross-section throughout the section. Its primary purpose is to guide the flow smoothly around the corner with minimum pressure loss and reduced flow separation. The bend was fabricated using GFRP through a hand layup process.

Table 4-4: 90 degree bend Detailed design parameters

Parameter	Value	Notes
Geometry & Dimensions		
Inlet dimensions	150 mm × 150 mm	Square cross-section at inlet
Outlet dimensions	150 mm × 150 mm	Square cross-section at outlet
Bend angle	90°	Right-angle turn
Material & Layup		
Material	GFRP	Woven glass fiber reinforced polymer
Layer 1	300 GSM × 1 layer	Inner surface layer
Layers 2 & 3	450 GSM × 2 layers	Structural layers
Resin system	Polyester resin	Hand layup compatible
Manufacturing Process		

Fabrication method	Hand layup	Manual wet layup of glass fiber plies
Assembly method	Template-guided fixing	Flat GFRP panels aligned and fixed using templates; no formal mold used
Structural reinforcement	External wood frames	Outer wall rigidity and strength

4.3.3 Wide Angle Diffuser

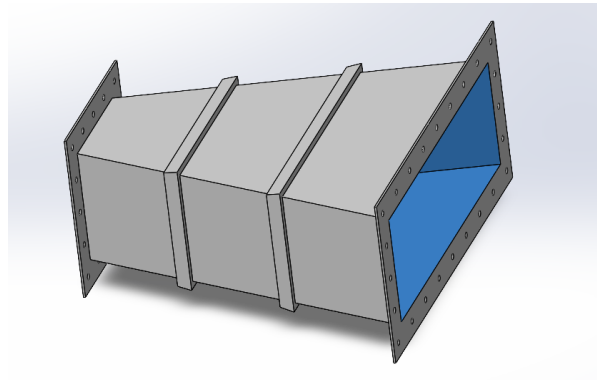


Figure 4.15: Wide angle diffuser

The wide-angle diffuser is used to gradually reduce the flow velocity and recover static pressure before the fluid enters the downstream sections. Due to the large divergence angle, four internal vanes were incorporated to guide the flow and minimize flow separation. The diffuser was fabricated using GFRP through a hand layup process.

Table 4-5: wide angle diffuser Detailed design parameters

Parameter	Value	Notes
Geometry & Dimensions		
Overall length	475 mm	Square cross-section at inlet
Total divergence angle	35°	Full included angle of the diffuser walls
Number of vanes	4	Flow-straightening vanes to control separation
Vane angle	7°	Individual vane setting angle relative to flow axis
Material & Layup		
Material	GFRP	Woven glass fiber reinforced polymer
Layer 1	300 GSM × 1 layer	Inner surface layer
Layers 2 & 3	450 GSM × 2 layers	Structural layers
Resin system	Polyester resin	Hand layup compatible
Manufacturing Process		
Fabrication method	Hand layup	Manual wet layup of glass fiber plies

Assembly method	Template-guided fixing	Flat GFRP panels aligned and fixed using templates; no formal mold used
Structural reinforcement	External frames wood	Outer wall rigidity and strength

4.3.4 Honeycomb section

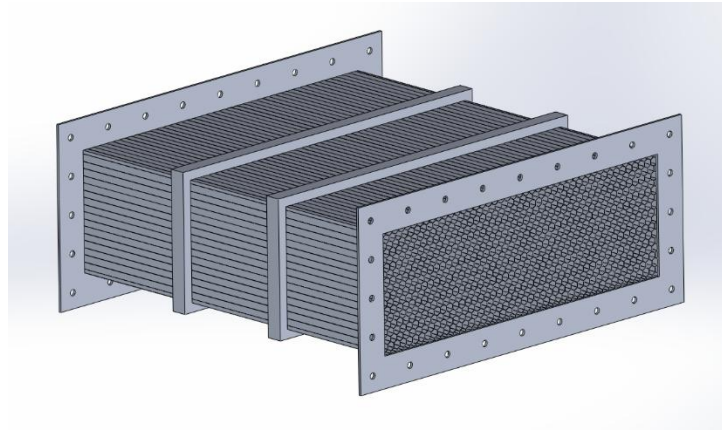


Figure 4.16: Honeycomb structure

The honeycomb section is installed to reduce large-scale turbulence and remove swirl generated by upstream components such as the pump and bends. Its hexagonal cell structure guides the flow into parallel passages, improving flow uniformity before the contraction and test section. The honeycomb was manually fabricated using thin aluminum foil sheets bent and bonded together to form the required geometry. Wooden and glass fiber supports were used to provide structural stability and secure the component within the tunnel.

Table 4-6: Honeycomb structure detailed design parameters

Parameter	Value	Description
Geometry & Dimensions		
Honeycomb type	Hexagonal cell structure	Selected for improved flow uniformity and minimal gaps
Overall length	500 mm	Length of the honeycomb section along flow direction
Cell diameter	10 mm	Hydraulic diameter of individual honeycomb cells
Cross-sectional size	450 mm × 150 mm	Matches settling chamber dimensions
Material & Construction		
Cell material	Aluminum foil	Lightweight material for flow conditioning
Structure type	Honeycomb array	Parallel flow passages for swirl reduction
Wall thickness	0.1–0.2 mm	Thin walls to minimize pressure loss

Support frame	Wooden and glass fiber	Provides structural stability inside chamber
Manufacturing Process		
Fabrication method	Aluminum foil sheets were bent and bonded together to form a hexagonal honeycomb structure	Manual fabrication process used to achieve the required cell geometry
Installation location	Settling chamber	Positioned upstream of the contraction cone
Mounting method	Bolted / fixed support	Secures honeycomb within tunnel structure

4.3.5 Settling chamber

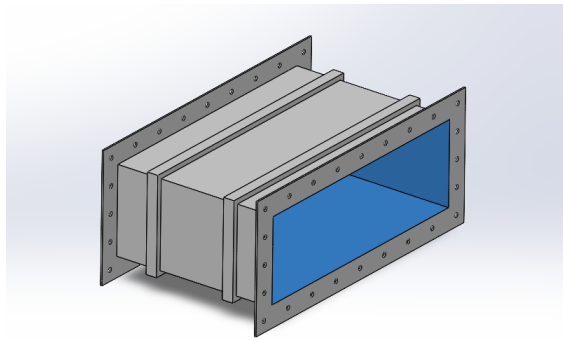


Figure 4.17: Settling chamber

The settling chamber is used to stabilize and condition the flow before it enters the contraction and test section. Its primary purpose is to reduce turbulence intensity and provide a more uniform velocity distribution by allowing disturbed flow structures to dissipate. The chamber was fabricated using GFRP through a hand layup process, providing sufficient structural strength and a smooth internal surface.

Table 4-7: settling chamber Detailed design parameters

Parameter	Value	Description
Geometry & Dimensions		
Overall length	300 mm	Along the central axis
Material & Layup		
Material	GFRP	Woven glass fiber reinforced polymer
Layer 1	300 GSM $\times$ 1 layer	Inner surface layer
Layers 2 & 3	450 GSM $\times$ 2 layers	Structural layers

Resin system	Polyester resin	Hand layup compatible
Manufacturing Process		
Fabrication method	Hand layup	Manual wet layup of glass fiber plies
Structural reinforcement	External wood frames	Outer wall rigidity and strength

4.3.6 Contraction section

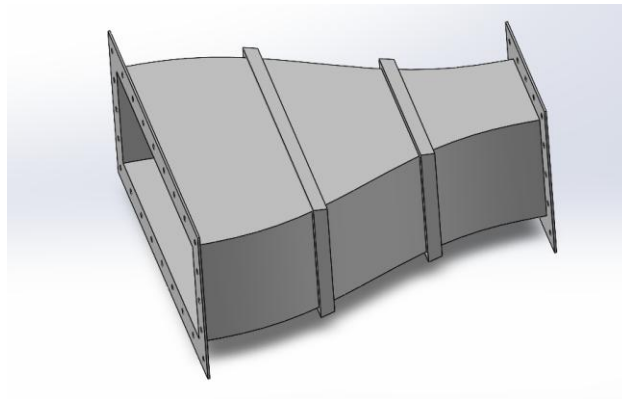


Figure 4.18: Contraction section detailed design

The contraction section is used to accelerate the flow and improve flow uniformity before the fluid enters the test section of the hydrodynamic tunnel. By gradually reducing the cross-sectional area, it helps decrease turbulence intensity and produce a smoother, more stable flow profile. The component was fabricated using GFRP through a hand layup process with multiple glass fiber layers to provide structural strength and a smooth internal surface.

Table 4-8: Contraction section Detailed design parameters

Parameter	Value	Notes
Geometry & Dimensions		
Overall length	522 mm	Along the central axis of the contraction
Material & Layup		
Material	GFRP	Woven glass fiber reinforced polymer
Layer 1	300 GSM $\times$ 1 layer	Inner surface layer
Layers 2 & 3	450 GSM $\times$ 2 layers	Structural layers
Resin system	Polyester resin	Hand layup compatible
Manufacturing Process		
Fabrication method	Hand layup	Manual wet layup of glass fiber plies
Structural reinforcement	External wood frames	Outer wall rigidity and strength

4.3.7 Test Section

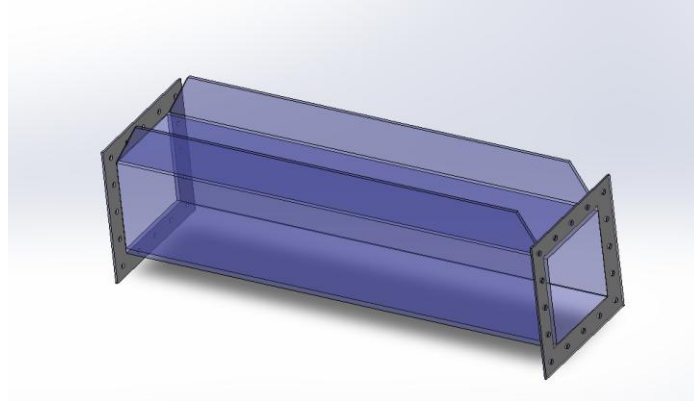


Figure 4.19: Test section detailed drawing

The test section serves as the primary experimental region where flow conditions are evaluated under controlled and observable conditions. Its main purpose is to provide a uniform and stable flow field after the contraction section, ensuring that measurements are not influenced by upstream disturbances. It also enables detailed flow visualization and data acquisition, allowing assessment of velocity distribution, turbulence characteristics, and overall flow quality. The transparent acrylic construction further supports optical access, making it suitable for visualization studies.

Table 4-9: Test section Detailed design parameters

Parameter	Value	Notes
Cross-section	150 mm × 150 mm	Square open channel cross-section
Overall length	750 mm	Along the central axis of the test section
Channel type	Open channel	Top surface open to atmosphere
Material	Transparent acrylic	Allows full optical access for flow visualization

5 Chapter 5 - Results and Discussion

5.1 Analytical Calculation Results

This section presents the consolidated results of the analytical design calculations detailed in Chapter 3. The results establish the key geometric parameters of each tunnel component, quantify the total hydraulic resistance of the circuit, and verify the adequacy of the selected pump at the design flow rate of $Q = 0.0136 \text{ m}^3/\text{s}$.

5.1.1 Component Design Summary

The finalized geometric parameters of all primary tunnel components are summarized in Table 5.1.

Table 5-1: Finalized design parameters for all tunnel components

Component	Inlet Dimensions (mm)	Outlet Dimensions	Key Parameter
Vertical diffuser	Ø 75 (circular)	150×150	Half-angle = 7°
Settling chamber	450×150	450×150	Length = 300 mm
Contraction section	450×150	150×150	Contraction ratio = 3
Test section	150×150	150×150	Open channel
Wide-angle diffuser	150×150	150×450	Total angle = 35° , 4 vanes
90° bends	150×150	150×150	Bend radius = 150
Interconnecting pipe	Ø 75	Ø 75	Standard uPVC
Honeycomb	450×150	450×150	Length = 500mm

All mean flow velocities at each cross-section were computed from the continuity equation:

$$U = \frac{Q}{A} \quad (42)$$

where A is the local cross-sectional flow area. The resulting velocity at each component is summarized in Table 5.2.

Table 5-2: Mean flow velocity at each tunnel cross-section

Component	Cross-sectional Area (m ²)	Mean Velocity (m/s)
Interconnecting pipe	4.42×10^{-3}	3.07
Vertical diffuser inlet	4.42×10^{-3}	3.07
Vertical diffuser outlet / Settling chamber	6.75×10^{-2}	0.201
Contraction inlet	6.75×10^{-2}	0.201
Contraction outlet / Test section	2.25×10^{-2}	0.604
90° bend	2.25×10^{-2}	0.604

5.1.2 Contraction Design Verification

The contraction section reduces the cross-sectional area from $A_{in} = 0.0675 \text{ m}^2$ at the inlet to $A_{ts} = 0.0225 \text{ m}^2$ at the exit, yielding a contraction ratio of:

$$r_c = \frac{A_{in}}{A_{ts}} = \frac{0.0675}{0.0225} = 3 \quad (43)$$

The inlet and exit velocities are:

$$U_{in} = \frac{Q}{A_{in}} = \frac{0.0136}{0.0675} \approx 0.201 \text{ m/s}$$

$$U_{ts} = \frac{Q}{A_{ts}} = \frac{0.0136}{0.0225} \approx 0.604 \text{ m/s}$$

The static pressure drop across the contraction was verified using the Bernoulli equation:

$$\Delta p = \frac{1}{2} \rho (U_{ts}^2 - U_{in}^2) = \frac{1}{2} \times 1000 \times (0.604^2 - 0.201^2) \approx 162 \text{ Pa} \quad (44)$$

This pressure drop is small relative to the available pump head and does not impose a significant energy demand on the system. The Bell-Mehta fifth-degree polynomial wall profile adopted for the contraction is illustrated in Figure 5.1.

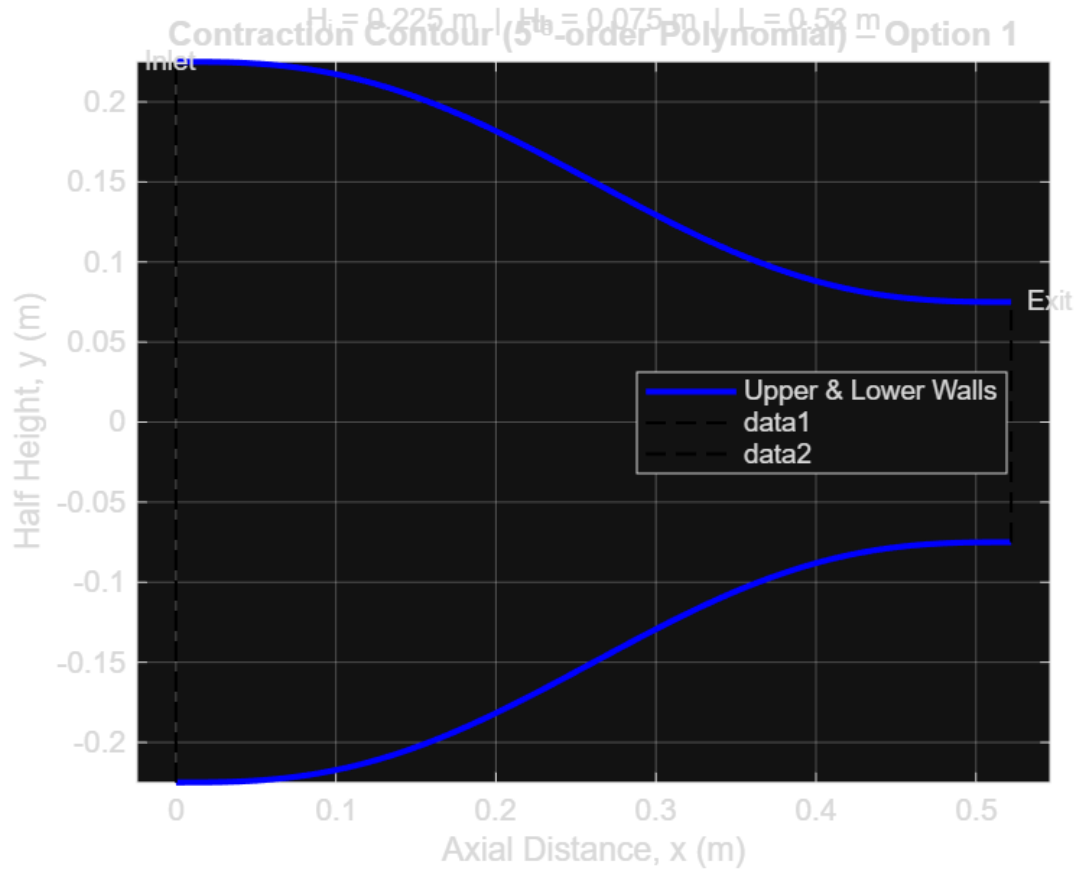


Figure 5.1: Bell-Mehta contraction wall profile plot from MATLAB

5.1.3 Interconnecting Pipeline Selection

The mean flow velocity in the 75 mm diameter interconnecting pipeline is:

$$U_{pipe} = \frac{4Q}{\pi d^2} = \frac{4 \times 0.0136}{\pi \times 0.075^2} \approx 3.07 \text{ m/s} \quad (45)$$

The corresponding Reynolds number confirms fully turbulent flow:

$$Re_{pipe} = \frac{U_{pipe} \cdot d}{\nu} = \frac{3.07 \times 0.075}{1.0 \times 10^{-6}} \approx 2.3 \times 10^5 \quad (46)$$

consistent with the Darcy-Weisbach friction factor assumption applied in the head loss analysis. The selected 75 mm pipe diameter also matches the suction and delivery port diameter of the pump, eliminating the need for reducers at the pump connections.

5.1.4 Head Loss Analysis Results

The total system head loss was evaluated by applying the head loss framework around the complete tunnel circuit. Major losses in straight pipe sections were computed using the Darcy-Weisbach equation:

$$h_f = f \cdot \frac{L}{D_h} \cdot \frac{U^2}{2g} \quad (47)$$

where the Darcy friction factor f was obtained from the Swamee-Jain approximation to the Colebrook-White equation:

$$f = \frac{0.25}{\left[\log_{10} \left(\frac{\varepsilon}{3.7D_h} + \frac{5.74}{Re^{0.9}} \right) \right]^2} \quad (48)$$

with pipe roughness $\varepsilon = 0.0015$ mm for smooth uPVC. Minor losses for each component were computed using:

$$h_m = K \cdot \frac{U^2}{2g} \quad (49)$$

where loss coefficients K were obtained from established empirical correlations as listed in Table 3.8. The MATLAB-based head loss model evaluated all components and produced a component-by-component breakdown of hydraulic resistance. The results are presented in Table 5-3: component wise head loss calculated values.

Table 5-3: component wise head loss calculated values

COMPONENT HEAD LOSS BREAKDOWN				
Component				Head Loss (m)
1. Horiz. pipe	PVC	D=75mm	L=300mm	0.0203 m
2. Elbow	PVC	D=75mm	90°	0.2865 m
3. Vert. pipe	PVC	D=75mm	L=250mm	0.0169 m
4. Vert. diffuser	GFRP	75mm→150×150	7° half-angle	0.0021 m
5. 90° bend	GFRP	150×150	no vanes	0.0147 m
6. Wide-angle diff.	GFRP	150×150→450×150	35°, no vanes	0.0056 m
7. Honeycomb	PLA	450×150	L=250mm, cell D=10mm	0.0013 m
8. Settling chamber	GFRP	450×150	L=300mm	0.0000 m
9. Contraction	GFRP	450×150→150×150	L=450mm	0.0006 m
10. Test section	Acrylic	150×150	L=800mm	0.0013 m
11. 90° bend	GFRP	150×150	no vanes	0.0147 m
12. Return diffuser	GFRP	150×150→75mm	converging	0.0005 m
13. Vert. pipe	PVC	D=75mm	L=250mm	0.0169 m
14. Elbow	PVC	D=75mm	90°	0.2865 m
15. Horiz. pipe	PVC	D=75mm	L=2000mm	0.1351 m
16. 2× elbows + 3× pipes	PVC	D=75mm	L=300mm each	0.6338 m
TOTAL HEAD LOSS				1.4369 m
AVAILABLE PUMP HEAD				9.1440 m
REMAINING HEAD				7.7071 m
SAFETY FACTOR				6.36

The total system head loss was determined as:

$$H_{total} = \sum h_f + \sum h_m \approx 0.9 \text{ m} \quad (50)$$

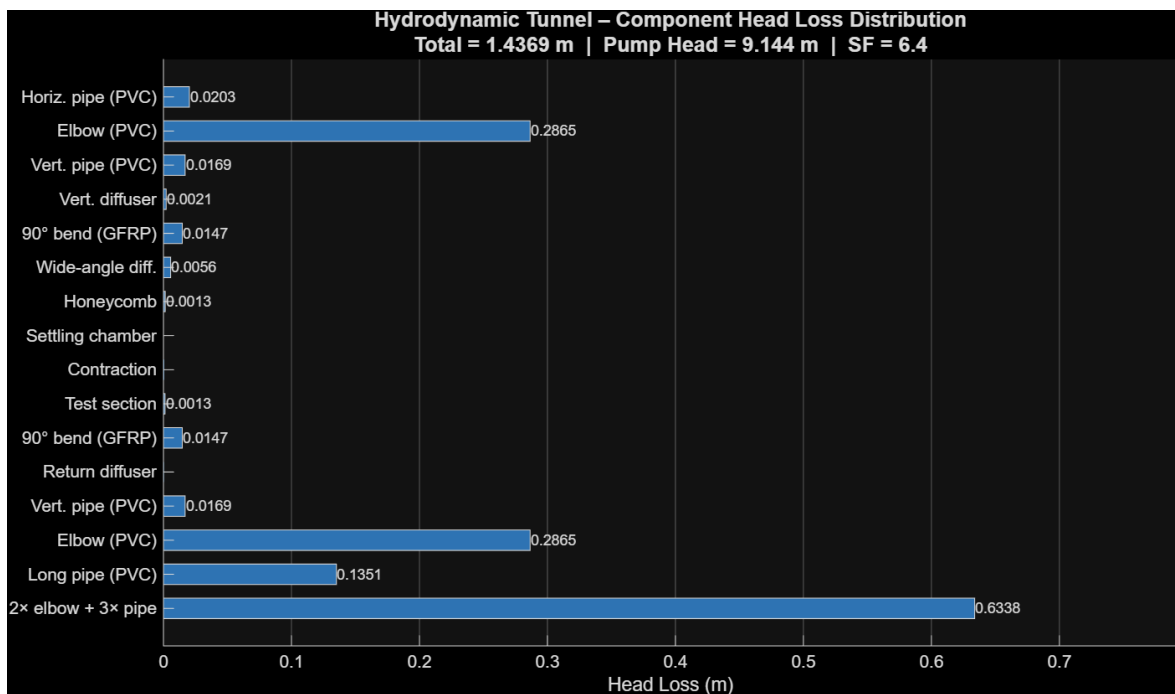


Figure 5.2: Bar chart of component head loss contributions from MATLAB output

5.1.5 Pump Adequacy Verification

The selected pump is a SOLEX SX318/3T centrifugal pump driven by an EVERGEAR YE3-90L three-phase asynchronous motor rated at 2.2 kW / 3 HP at 2840 RPM. The pump performance characteristic curve is shown in Figure 5.3: SOLEX SX318/3T pump performance characteristic curve.

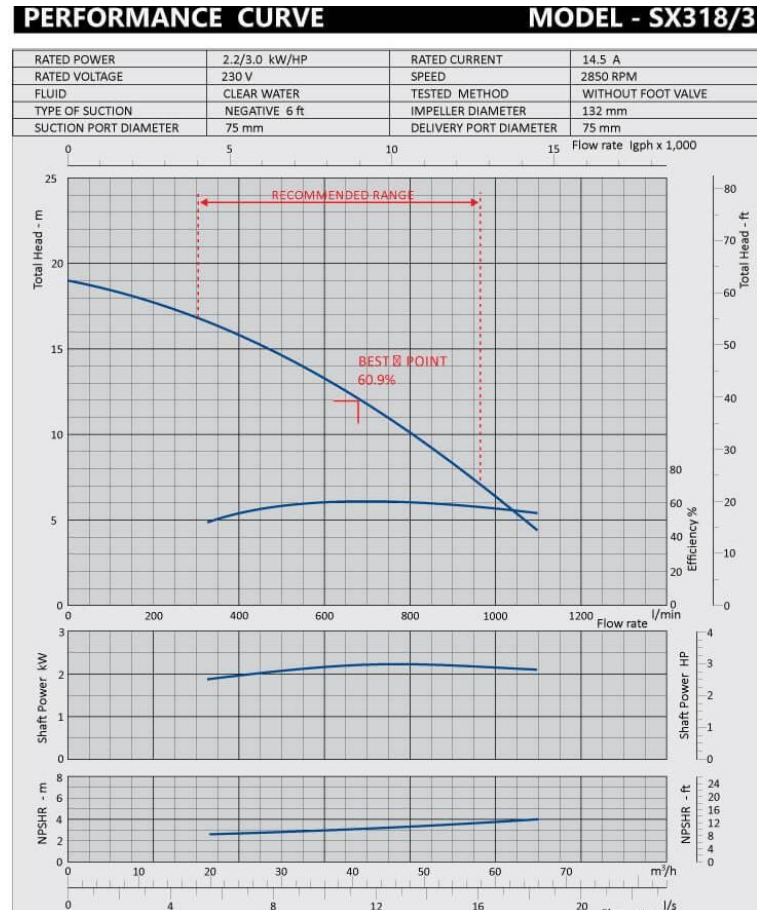


Figure 5.3: SOLEX SX318/3T pump performance characteristic curve

The pump adequacy condition requires:

$$H_{pump} \geq H_{total} + \Delta z \quad (51)$$

where Δz is the static head difference arising from the vertical geometry of the tunnel circuit. At the design flow rate of $Q = 0.0136 \text{ m}^3/\text{s}$, the available pump head read from the characteristic curve is:

$$H_{pump} = 30 \text{ ft} = 9.14 \text{ m}$$

Since $H_{pump} = 9.14 \text{ m} \gg H_{total} \approx 0.9 \text{ m}$, the pump head exceeds the total circuit resistance by a factor of approximately 10, confirming that the selected pump is more than adequate to sustain the design flow rate. The notable margin between available and required head further confirms that at this scale, head loss is not the critical pump selection criterion; rather, the required flow rate and available port geometry govern the pump specification.

5.2 Simulation Results - CFD

5.2.1 Wide-Angle Diffuser - Baseline Simulation

Transient Flow Separation Analysis

The transient simulation was carried out to capture the unsteady flow behavior within the wide-angle diffuser. Unlike the steady-state approach, the transient simulation resolves the time-dependent development of flow separation, revealing the location, extent, and evolution of separated flow regions over time.

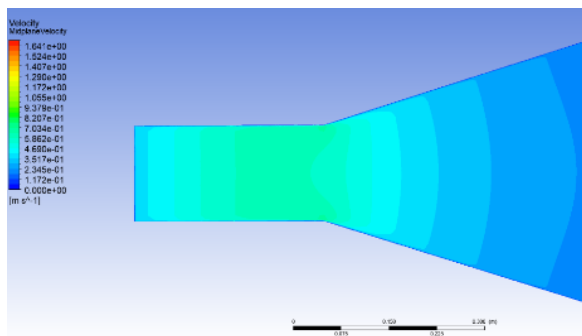


Figure 5.4: 0.25 S - Early transient stage (Attached flow)

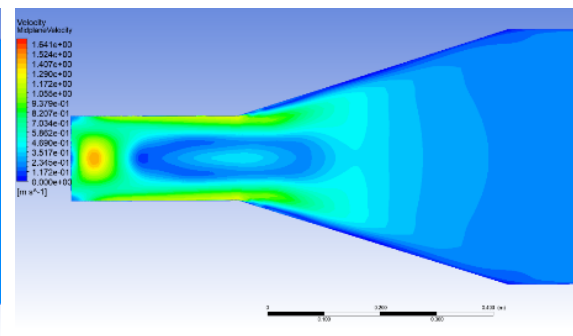


Figure 5.5: 1.5 S – Separation forming

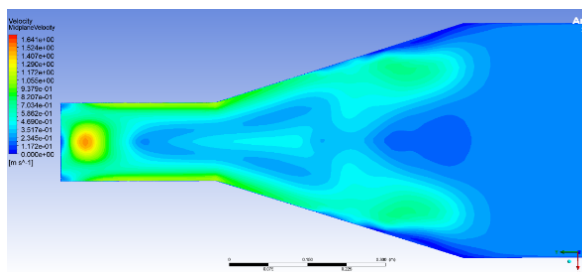


Figure 5.6: 2.2 S - Developed separation

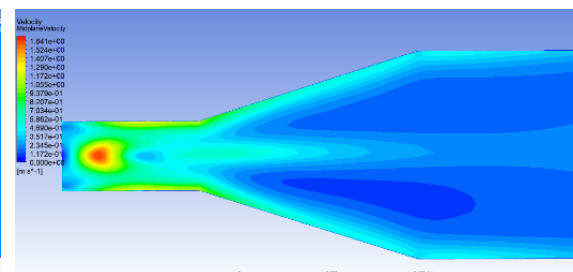


Figure 5.7: Timestep 19.6 S– Quasi steady flow

The transient velocity contours in Figures 5.1 through 5.4 show how the flow inside the wide-angle diffuser changes over time. At $t = 0.25 \text{ s}$, the flow is smooth and moves evenly

through the diffuser without any issues. At $t = 1.5$ s, the flow begins to separate from the walls and a recirculation bubble starts to form. By $t = 2.2$ s, the separation is fully developed and the flow splits into two high-velocity regions along the top and bottom walls, with a large slow-moving zone forming in the center. At $t = 2.8$ s, this central dead zone grows significantly larger while the two wall jets persist, maintaining a symmetric but severely separated flow pattern. By $t = 19.6$ s, the flow settles into a quasi-steady state where the two wall jets remain but become unequal in strength, and the central dead zone dominates most of the diffuser cross-section. Throughout this process, the separated flow forces the remaining fluid into a high-velocity jet through the core of the diffuser, retaining kinetic energy that should have been converted into static pressure recovery. This represents a direct loss in diffuser efficiency. These results confirm that the wide-angle diffuser without vanes suffers from severe flow separation that persists over time. This uneven flow would carry downstream and negatively affect the quality of flow in the test section. Therefore, splitter vanes were introduced into the diffuser to divide the flow into smaller channels, reducing the effective expansion angle and suppressing flow separation.

Pressure Recovery Analysis at Wide angle diffuser

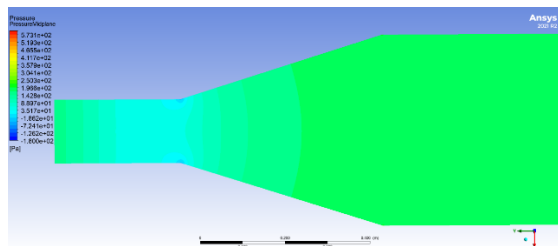


Figure 5.8: Timestep 25 - Uniform Pressure Recovery

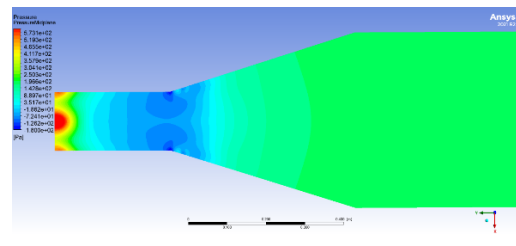


Figure 5.9: Timestep 150 - Early pressure disturbance

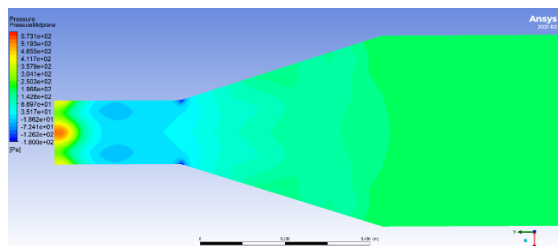


Figure 5.10: Timestep 220 - Symmetric Low-Pressure Regions

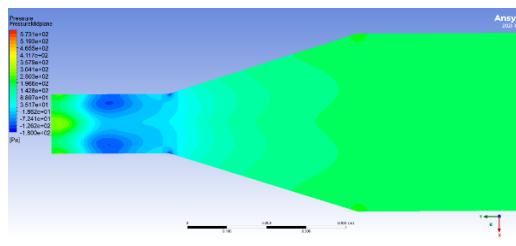


Figure 5.11: Timestep 1960 - Nearly stable pressure distribution

The transient pressure contours in Figures 5.5 through 5.8 show how pressure changes inside the wide-angle diffuser over time. At $t = 0.25$ s, the pressure rises smoothly from inlet to

exit, showing good pressure recovery. At $t = 1.5$ s, negative pressure zones appear in the upstream region as the recirculation bubble develops, and a high-pressure spot forms at the inlet wall. By $t = 2.2$ s, two low-pressure pockets form symmetrically about the centerline, matching the split flow pattern seen in the velocity contours. At $t = 2.8$ s, these low-pressure zones grow and extend further into the diffuser. By $t = 19.6$ s, several alternating low-pressure zones settle into a nearly stable pattern. Throughout all time steps, the diffuser exit maintains a relatively uniform positive pressure, confirming that some pressure recovery is still achieved. However, the highly disturbed pressure field inside the diffuser confirms that significant pressure recovery is lost due to flow separation.

Pressure Recovery Coefficient at Quasi-Steady State

The Pressure Recovery Coefficient (C_P) at quasi-steady state was evaluated using the expression:

$$C_P = \frac{P_{out} - P_{in}}{0.5 \times \rho \times V_{in}^2} \quad (51)$$

where P_{out} and P_{in} are the area-averaged static pressures at the diffuser outlet and inlet respectively, ρ is the fluid density of water (998.2 kg/m³), and V_{in} is the mean inlet velocity at the diffuser inlet (m/s). The pressure recovery coefficient quantifies the fraction of dynamic pressure converted to static pressure recovery along the diffuser. The computed value of C_P at quasi-steady state was found to be 0.593, indicating that approximately 59.3% of the inlet dynamic pressure was successfully recovered as static pressure through the diffuser section.

5.2.2 Turbulence Intensity Decay Analysis

Turbulence intensity is a key parameter governing the flow quality within the test section of a hydrodynamic tunnel. High turbulence levels in the flow can significantly affect experimental measurements by introducing unsteady fluctuations that interfere with the behavior of test models. Therefore, understanding how turbulence evolves through the tunnel components is essential for evaluating the suitability of the design for experimental testing. In this study, the inlet turbulence intensity was set to 8% at the vertical transition diffuser inlet, representing the turbulent flow delivered by the recirculation pump.

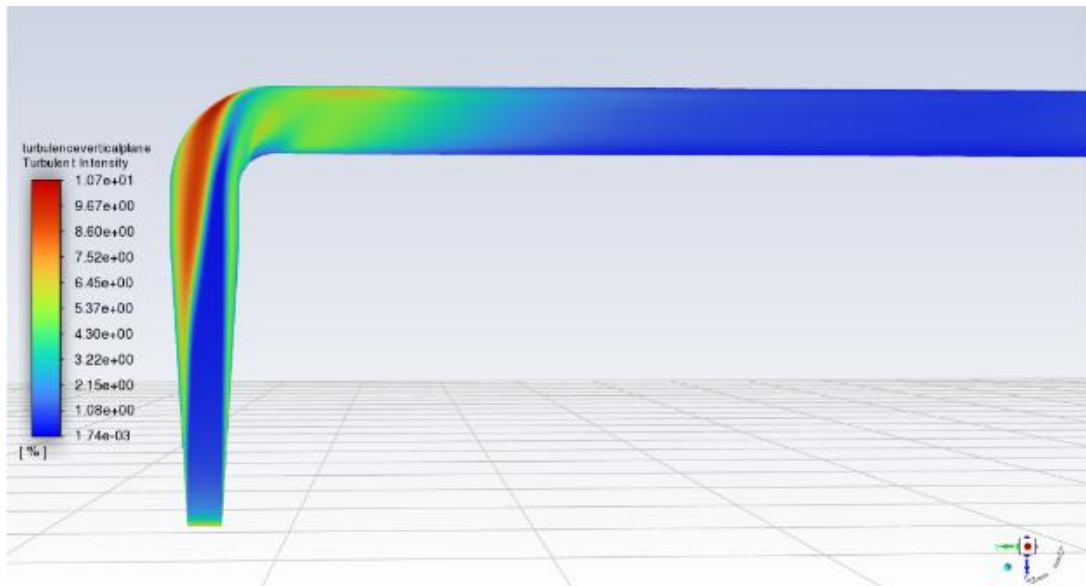


Figure 5.12 - Turbulence intensity variation from diffuser inlet

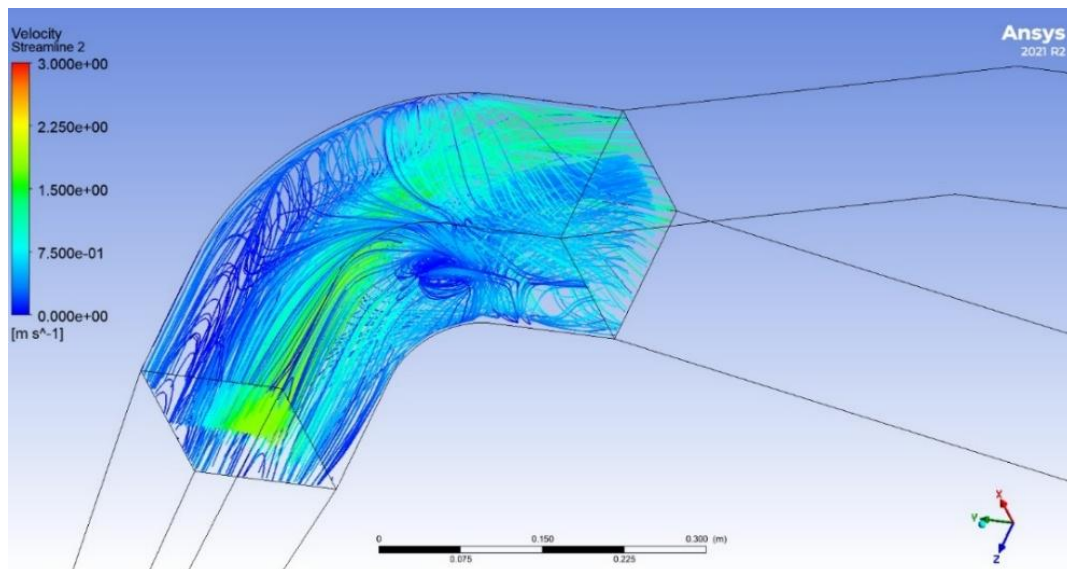


Figure 5.13 - 90 bend Velocity streamlines

Figure 5.9 shows the turbulence intensity distribution along the vertical transition diffuser and 90° bend on a vertical plane. In the original design intent, the vertical diffuser was included to provide static pressure rise and to allow turbulence intensity to decay before the flow enters the wide-angle diffuser. However, the simulation revealed that while the vertical diffuser does reduce the turbulence intensity as intended, the 90° bend immediately following it reintroduces turbulence back into the flow. As clearly visible in Figure 5.9, the turbulence intensity is relatively low within the vertical diffuser section, but rises sharply to a peak of 10.71% at the outer wall of the 90° bend. This increase is caused by the strong

flow curvature and secondary flow effects induced by the bend geometry, which energize the boundary layer and generate additional turbulent fluctuations. This finding highlights that the 90° bend acts as an additional turbulence source beyond the initial design assumption.

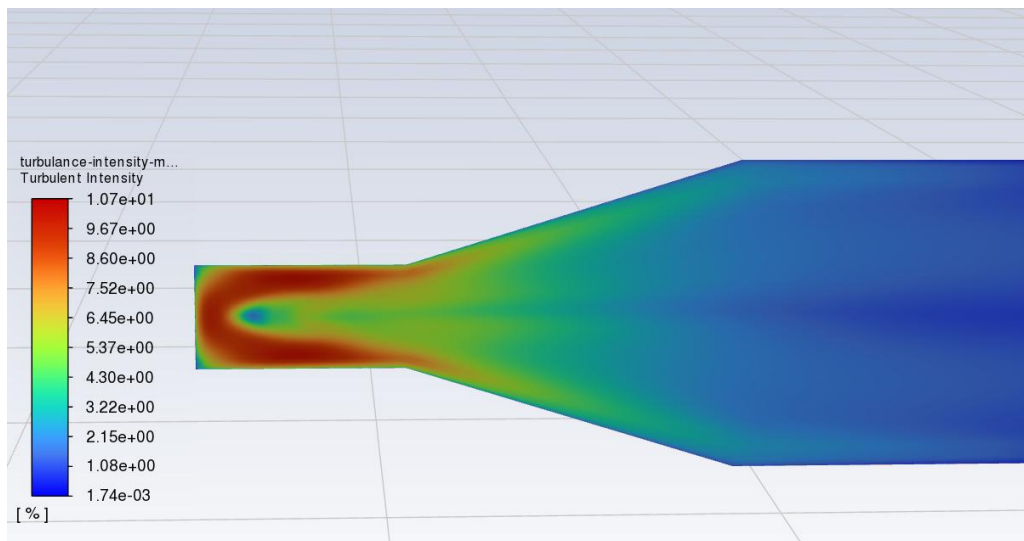


Figure 5.14 - Turbulence intensity decay through the wide-angle diffuser

Figure 5.11 shows the turbulence intensity distribution on the horizontal midplane, capturing the flow through the wide-angle diffuser. As the high turbulence flow entering the wide-angle diffuser at 10.71% passes through the expanding diffuser section, the turbulence intensity decays significantly along the diffuser length. This decay occurs due to the increasing cross-sectional area of the diffuser, which reduces the mean flow velocity and allows the turbulent fluctuations to dissipate. By the diffuser exit, the turbulence intensity has reduced to approximately 2.08%, representing a significant improvement in flow quality. Following the diffuser exit, the flow passes through the honeycomb flow straightener, which is expected to reduce the turbulence intensity even further by breaking down the remaining large-scale turbulent structures before the flow enters the settling chamber and test section. This confirms that the wide-angle diffuser, despite suffering from flow separation in its baseline configuration, still plays an important role in decaying turbulence intensity along the tunnel circuit.

5.2.3 Design Modifications Arising from CFD

The CFD simulation of the baseline wide-angle diffuser configuration clearly demonstrated that the diffuser in its original form suffers from severe flow separation, poor pressure recovery, and uneven flow conditions. These findings established the need for a design

modification to suppress flow separation and improve the overall flow quality delivered to the settling chamber and test section. Based on the simulation findings and supported by the work of Waitman, Reneau, and Kline [12], who investigated the effects of inlet conditions on the performance of two-dimensional subsonic diffusers, splitter vanes were introduced into the wide-angle diffuser as the primary design modification.

Splitter Vane Design and Parameters

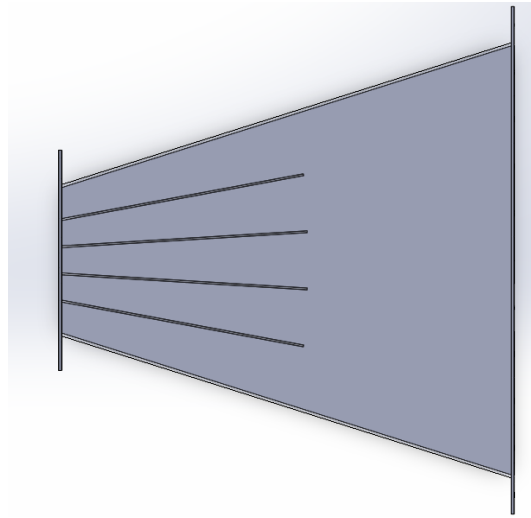


Figure 5.15 - Splitter vane design

The splitter vane geometry was determined based on the design criteria established by Waitman, Reneau, and Kline [12]. Table 2, reproduced from their work, presents the recommended vane configurations for a range of diffuser divergence angles. For the present design with a total divergence angle of $2\theta = 35^\circ$, the highlighted row recommends a configuration of 4 vanes with an individual vane angle of $\alpha = 7^\circ$ relative to the centerline, which was adopted as the basis for the splitter vane design in the present study.

2 θ , deg	n	α , deg	b/a	b	a	f/a_{max}	fmax	ftested
6	1	3	1.2	1.8	1.5	11.4	17.1	15
10	1	5	1.2	1.8	1.5	11.4	17.1	15
14	1	7	1.2	1.8	1.5	11.4	17.1	15
21	2	7	1.2	1.2	1	11.4	11.4	12
28	3	7	1.2	0.9	0.75	11.4	8.56	9

35	4	7	1.2	0.72	0.6	11.4	6.84	6
----	---	---	-----	------	-----	------	------	---

Table 5-4 - Waitman, Reneau and Kline Recommendations

Based on these recommendations and the physical dimensions of the wide-angle diffuser, the actual vane parameters were calculated and are summarized in Table 1. The spacing between adjacent vanes and between the wall and the adjacent vane were determined to closely match the recommended ratios from the reference design criteria. The vane length in the flow direction was also selected to fall within the recommended range, ensuring effective flow guidance through each sub-channel.

Parameter	Description	Value
Number of vanes	Total vanes installed	4
α	Vane angle relative to centerline	7°
t	Vane thickness	2mm
a	Minimum spacing between adjacent vanes	25.98 mm
b	Minimum spacing between wall and adjacent vane	31.98 mm
b/a	Spacing ratio	1.23
f	Vane length in flow direction	260 mm
f/a	Vane aspect ratio	10

Table 5-5 - Splitter vane parameters


5.3 Simulation results - FEA

Baseline FEA simulations were conducted for the contraction section, wide-angle diffuser, and settling chamber under a uniform internal pressure of 0.02 MPa, with no reinforcement present. The objective was to determine whether the as-designed 3 mm GFRP wall could independently withstand the hydrostatic loading, or whether additional structural reinforcement was required. The acceptance criterion, as defined in Section 4.2.5, requires:

$$\sigma_{VM} \leq \sigma_{allowable} = \frac{\sigma_t}{FoS} = \frac{180}{3} = 60 \text{ MPa} \quad (52)$$

The Von Mises stress distributions for all three components are presented below.

5.3.1 Contraction Section – baseline FEA results analysis

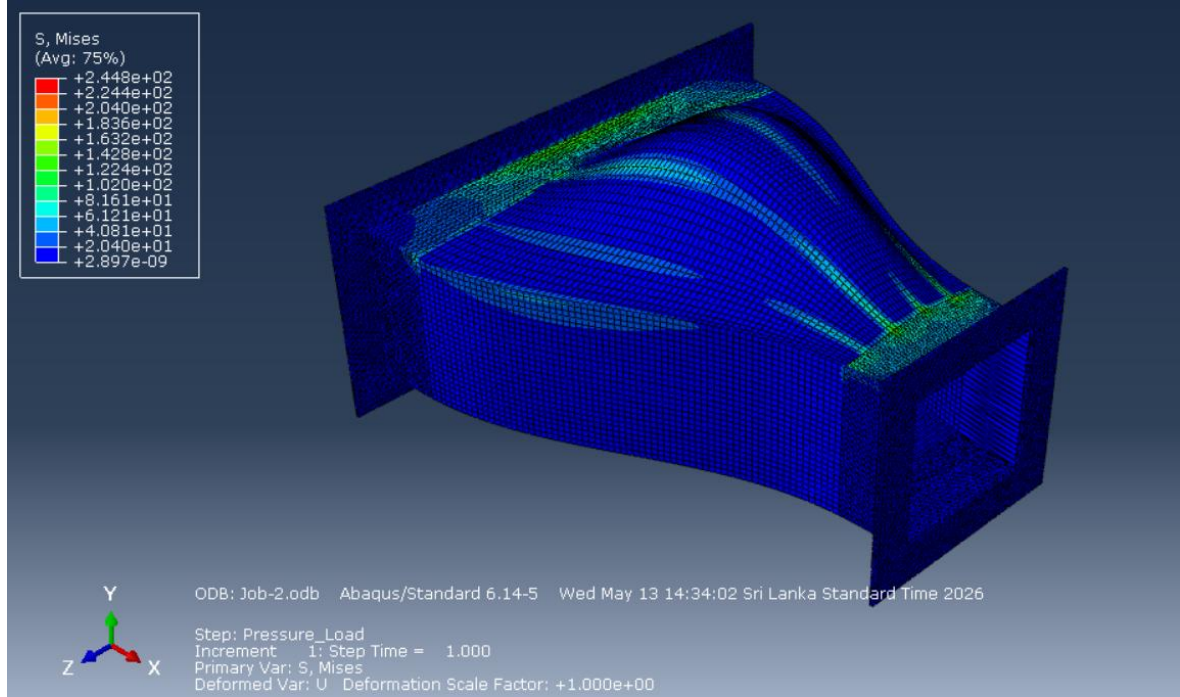


The baseline simulation of the contraction section produced a maximum Von Mises stress of **244.8 MPa**, which not only exceeds the allowable stress of 60 MPa but critically exceeds the tensile strength of the GFRP material (180 MPa). This indicates that the unreinforced 3 mm wall would undergo catastrophic failure under the design pressure loading. The highest stress concentrations are observed along the curved wall regions of the Bell-Mehta contraction profile, where the non-uniform curvature generates localized bending and membrane stress that the thin shell cannot resist without support. The flanges, being fully constrained, show near-zero stress as expected.

The large discrepancy between the applied pressure (0.02 MPa) and the resulting stress level is explained by the thin-shell bending mechanics governing the response. For a thin curved plate under uniform pressure, the bending stress scales as:

$$\sigma \propto \frac{p \cdot a^2}{t^2} \quad (53)$$

where a is the unsupported span and t is the wall thickness. With $t = 3$ mm and large unsupported curved spans across the contraction profile, the resulting bending stress amplification is severe, producing stresses far exceeding what the membrane alone would suggest [23].


5.3.2 Wide-Angle Diffuser - baseline FEA results analysis

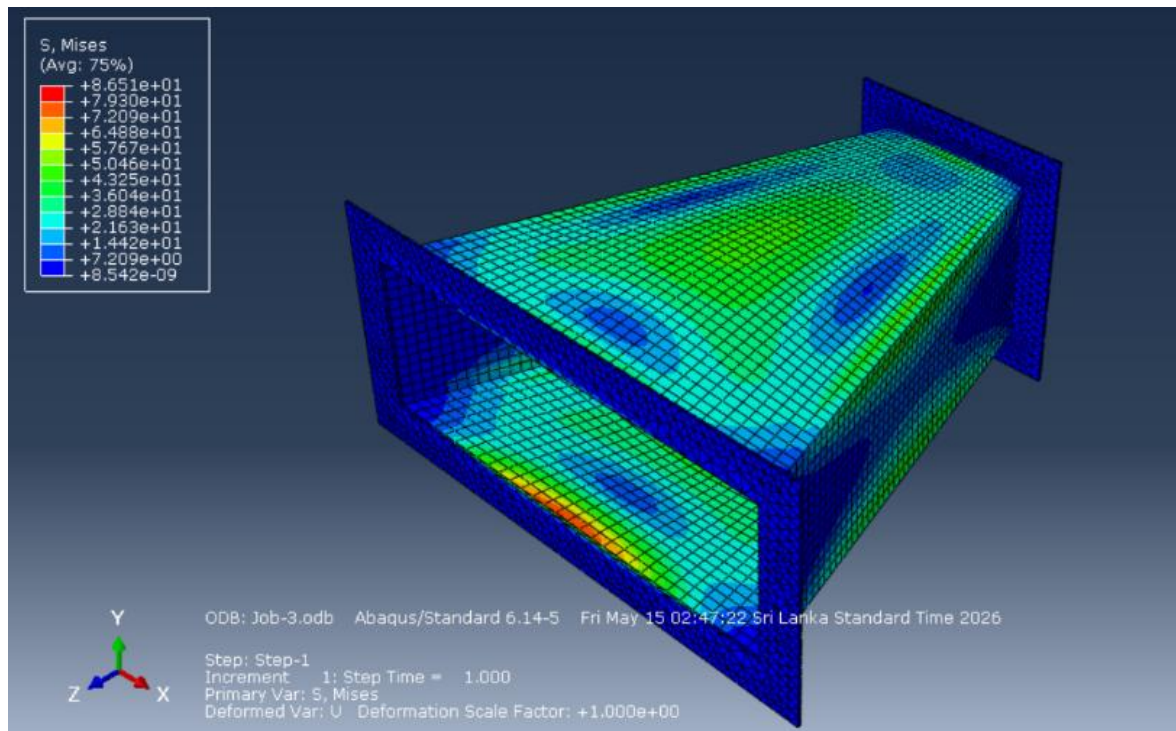

The baseline simulation of the wide-angle diffuser yielded a maximum Von Mises stress of **86.51 MPa**, exceeding the allowable stress of 60 MPa but remaining below the tensile strength of 180 MPa. The stress distribution shows that the majority of the component operates at low stress levels (below 22 MPa), with the critical concentration localized at the mid-span of the bottom wall, where the longest unsupported flat panel span produces the highest bending moment under the applied pressure. This behavior is consistent with classical plate bending theory for a uniformly loaded rectangular plate with fixed edges, where maximum stress occurs at the center of the longest free span [23].

While the component would not undergo immediate fracture at this stress level, the exceedance of the allowable stress with a factor of safety of 3 indicates that the design does not provide adequate structural reliability for sustained operation under the internal water column pressure.

5.3.3 Settling Chamber - baseline FEA results analysis

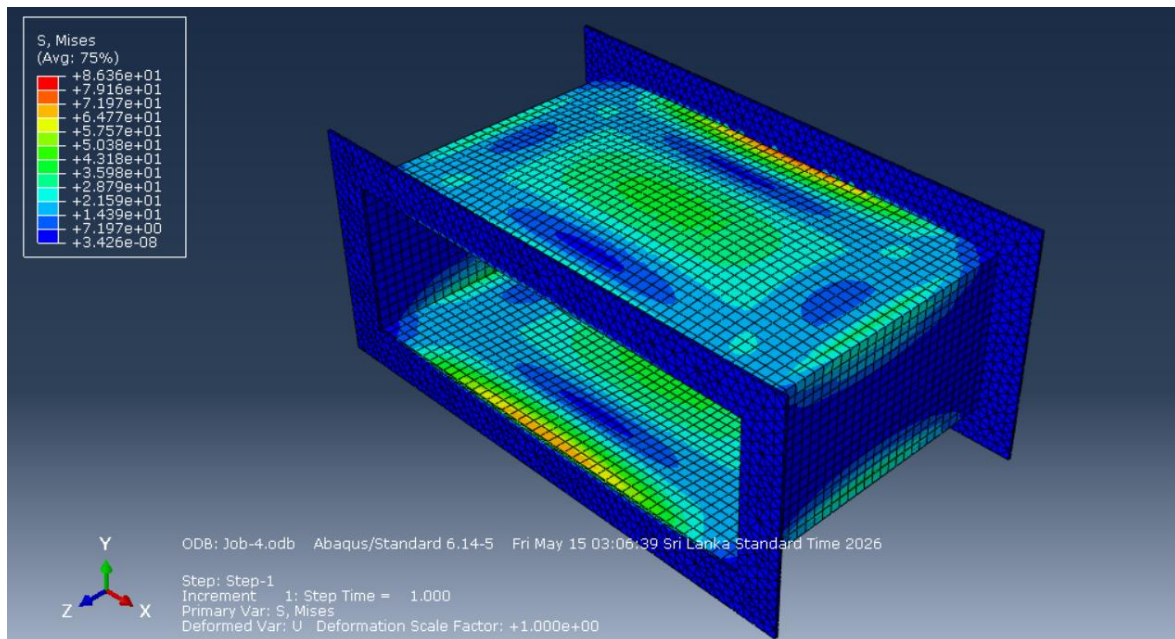

The baseline simulation of the settling chamber produced a maximum Von Mises stress of **86.36 MPa**, almost identical to the wide-angle diffuser result. The stress distribution is similarly characterized by low stress across most of the component, with concentrated bending stress at the mid-span regions of the bottom and side walls. The near-symmetry of the stress pattern reflects the uniform pressure loading on a regular rectangular geometry. As with the wide-angle diffuser, the peak stress exceeds the allowable of 60 MPa, indicating structural inadequacy of the unreinforced 3 mm GFRP wall.

5.3.4 Summary of Baseline FEA Results

The results for all three components are summarized in Table 5.2.

Table 5-6: Summary of baseline FEA results for all three components

Component	Max σ_{VM} (MPa)	$\sigma_{allowable}$ (MPa)	$\sigma_{tensile}$ (MPa)	Status
Contraction section	244.8	60	180	X Exceeds tensile strength
Wide-angle diffuser	86.51	60	180	X Exceeds allowable
Settling chamber	86.36	60	180	X Exceeds allowable

All three components fail the structural acceptance criterion under the design internal pressure of 0.02 MPa. The contraction section represents the most critical case, with the

maximum Von Mises stress exceeding the tensile strength of the material, indicating that catastrophic failure would occur without reinforcement. The wide-angle diffuser and settling chamber, while not predicted to fracture, exhibit stresses 44% above the allowable limit, providing insufficient safety margin for reliable operation.

These findings confirm that the 3 mm GFRP wall thickness alone is structurally inadequate, and that additional reinforcement is necessary for all fabricated components. Based on these results, external ribs and additional GFRP reinforcement layers were incorporated into the physical fabrication of all three components, as described in Section 5.3. Post-reinforcement FEA simulations to verify the structural adequacy of the reinforced design are planned and will be presented in the revised submission.

5.4 Fabrication

5.4.1 Material Selection - Evaluation of Options & Justification of Glass Fiber

Table 5-7: Material selection criteria

Component	Selected Material	Alternative Considered	Reason for Selection over Alternative
Vertical diffusers, 90° bends, wide angle diffuser, settling chamber, contraction section	Glass fiber	Aluminum, Sheet metal	Corrosion resistant, lightweight, smooth internal surface, easy to fabricate complex shapes, lower cost
Test section	Acrylic	Glass	Optically transparent for flow visualization, lighter than glass, easier to machine and handle
Honeycomb	Aluminum sheets	Polycarbonate	Both equally suitable, polycarbonate unavailable in required specification

5.4.2 Fabrication Method and Process Overview

Glass Fiber Components Fabrication

For all glass fiber components, the hand layup method was employed. For all components except the vertical diffusers, flat glass fiber sheets were first manufactured using this method. To achieve a smooth internal surface finish, the glass fiber layers were laid up directly onto a flat glass surface, which acted as a mold. The laminate consisted of one 300 GSM glass fiber sheet sandwiched between two 450 GSM sheets, bonded using polyester resin and cured at room temperature. The cured sheets were then cut to the required part shapes using CNC machining. The individual cut parts were subsequently assembled and joined together to form each component, and additional glass fiber layers were applied at the edges and joints to provide structural strength and prevent leakage.



Figure 5.16: Glass fiber sheets fabrication



Figure 5.17 - CNC machined glass fiber sheet parts

Then the components are reinforced with wood ribs all around the component in different lengths, approximately 2 ribs per component according to the length and shape of the component. Finally the ribs are reinforced with another layer of 450 GSM fiber sheet and bonded using resin to ensure maximum pressure bearing capacity.



Figure 5.18: reinforced fiber components

Glass fabrication

The test section was first decided to fabricate using acrylic sheets. But because the acrylic sheets needed to withstand the required pressure was determined as at least 10mm thick which is cost around 70,000 LKR per sheet. With the cost limitations it was decided to fabricate the test section with 8mm thick glass which reduce the fabrication cost significantly. The glass sheets was first cut using diamond cutter to the desired shape, and then bonded with silicon with the additional support provided with aluminum L bars.



Figure 5.19: fabricated glass test section

3D printing

The honeycomb structure was first decided to ship from China with the exact specifications fabricated using aluminum. But with time limitations (45 days for sea parcels) and high cost

for shipping (120,000 LKR), 3D printing was selected as an alternative method for demonstration purposes. First the 3D model has been prepared considering the 3D printer nozzle diameter and other relevant parameters like bed size. Then the parts are sliced and 3D printed in few machines simultaneously to reduce the time because for 1/8 of the honeycomb structure it takes about 1 day 10 hours to 2 days totaling 16 days.



Figure 5.20: 3D printed using CREALITY K1C printer with 0.4mm nozzle

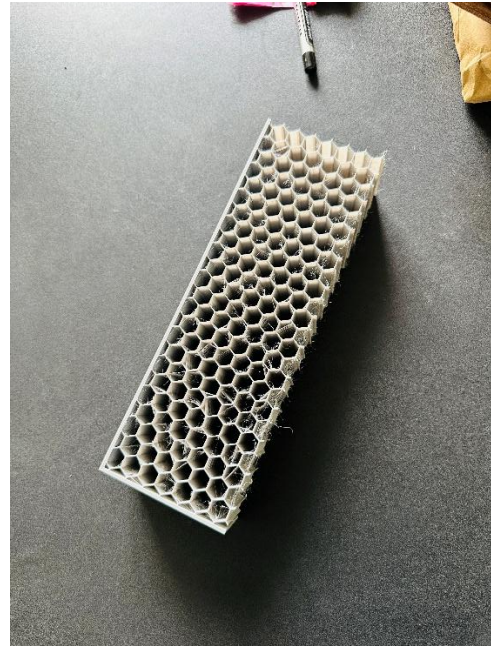


Figure 5.21: 3D printed sample

Metal structure fabrication

The metal structure was fabricated using box bars, 1.4mm gauge and 1x1 inch size. The box bars are first laser cut for desired sizes using metal laser cutting machine.



Figure 5.22: laser cut box bar parts



Figure 5.23: drawings prepared for welding

Then the laser cut box bar parts were welded and then a primer coat applied for better protection and rust resistance.



Figure 5.24: fabricated 2 metal structures

5.4.3 Glass Fiber Fabricated Components

Vertical Diffusers (×2)

The vertical diffusers are circular to rectangular transition sections connecting the circular pump outlet to the rectangular tunnel circuit. Due to the complex transition geometry, fabricating these components from flat glass fiber sheets was not feasible. Instead, a thin sheet metal mold was first constructed by bending and spot welding, and glass fiber layers were then laid up over this mold using the hand layup method with polyester resin and cured at room temperature.



Figure 5.25 - Thin sheet metal molds for vertical diffuser sections



Figure 5.26 - Vertical transition sections manufacturing

90° Bends (×2)

The 90° bends were fabricated using the same glass fiber sheet method described in Section 5.2.1. The cured glass fiber sheets were cut to the required part shapes using CNC machining and then assembled into the final bend geometry. To ensure precise alignment of the individual parts during assembly, laser cut plywood templates were used as alignment guides. Additional glass fiber layers were applied at the edges and joints after assembly to provide structural strength and prevent leakage.



Figure 5.27 - Plywood templates for part alignment during assembly



Figure 5.28 - Fabricated 90 bends

Wide-Angle Diffuser with Integrated Vanes

The wide-angle diffuser was fabricated using the same method as the previously described glass fiber components, where CNC machined glass fiber sheet parts were assembled and

reinforced with additional fiber layers at the edges and joints. The splitter vanes were designed to be fabricated from 2mm acrylic sheet due to its smooth surface finish and ease of cutting. However, the installation of the vanes into the diffuser body had not been completed at the time of writing and remains as part of the remaining fabrication work.

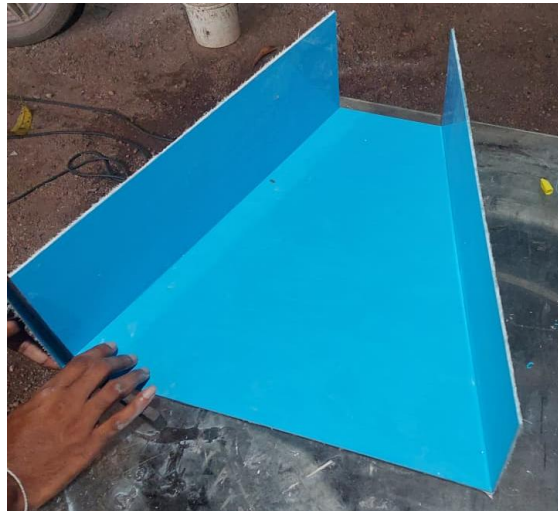


Figure 5.29 - Wide angle diffuser fabrication

Settling Chamber

The settling chamber was fabricated using the same method as the previously described glass fiber components, where CNC machined glass fiber sheet parts were assembled and reinforced with additional fiber layers at the edges and joints. Similar to the 90° bends, laser cut plywood templates were used during assembly to ensure precise alignment of the individual parts.

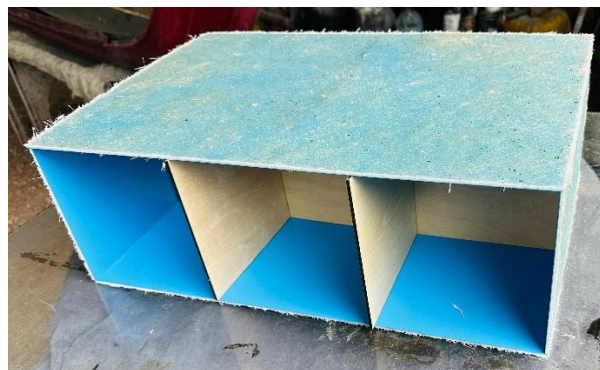


Figure 5.30 - Dimension verification using Plywood templates

Contraction Section

The contraction section was fabricated using the same method as the previously described glass fiber components, where CNC machined glass fiber sheet parts were assembled and

reinforced with additional fiber layers at the edges and joints. Laser cut plywood templates were used during assembly to ensure precise alignment of the individual parts. Due to the curved geometry of the contraction profile, achieving the correct curvature during assembly was particularly challenging. Additional plywood templates were therefore used to guide and maintain the curved shape accurately during the assembly process.

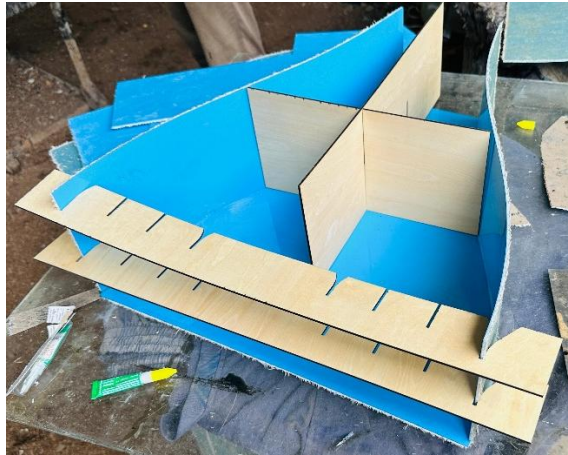


Figure 5.31- Plywood templates used to maintain curved contraction profile during assembly



Figure 5.32 - Contraction section

5.4.4 Dimensional Verification and Quality Assessment

Upon completion of fabrication, each component was inspected against its design dimensions using a tape measure and digital vernier caliper. Given the nature of the fabrication methods employed - primarily hand layup and manual assembly - exact dimensional replication was not expected; rather, the assessment aimed to confirm that deviations remained within acceptable tolerances for each method. The results are summarized in Table 5-8: Actual dimensional accuracy of each method.

The mild steel support structure was fabricated from box section bar and intentionally designed as two independent sub-frames. This two-part configuration serves a dual purpose: it simplifies transportation and handling of the assembled tunnel, and it provides a practical means of accommodating any dimensional variation arising from GFRP warping, gasket compression between flanges, or minor fabrication deviations. By adjusting the gap between the two sub-frames during final assembly, the overall tunnel length can be fine-tuned without any modification to the components themselves, ensuring correct alignment across all flange connections.

Table 5-8: Actual dimensional accuracy of each method

Fabrication Method	Components	Typical Tolerance Achieved	Surface Quality	Notes
GFRP hand layup	Diffusers, settling chamber, contraction, 90° bends	$\pm 2\text{--}3\text{ mm}$	Smooth internal surface (glass mold finish)	Minor thickness variation across panels; reinforcement ribs added externally
Glass sheet (hand cut and silicon bonded)	Test section	$\pm 0.5\text{--}1\text{ mm}$	Optically clear; smooth glass surface	Dimensional accuracy has been reduced because of manual bonding process.
Mild steel welded frame (laser cutting and arc welding)	Support structure	$\pm 1\text{--}2\text{ mm}$	Painted finish	Provides rigid alignment platform for all components
FDM 3D printing (PLA)	Honeycomb flow straightener	$\pm 0.3\text{--}0.5\text{ mm}$	Consistent cell geometry	Four sections aligned and bonded; minor joint gaps sealed
Sheet metal (laser cutting and arc welding)	Honeycomb casing	$\pm 0.5\text{--}1\text{ mm}$	Smooth, sharp corners to leave room for 3D printed honeycomb structure	Fitted within GFRP settling chamber section. Sheet metal bending was ignored to leave room for sharp corners of the 3D printed part.

6 Chapter 6 - Conclusions and Recommendations

6.1 Summary of Work Completed Against Objectives

The project was carried out against four objectives, restated here in specific and measurable terms consistent with the scope defined in Section 1.3:

Objective 1

To identify and document the relationships between key tunnel design parameters (contraction ratio, diffuser half-angle, settling chamber length, and honeycomb L/D ratio) and test section flow quality indicators (velocity uniformity and turbulence intensity), through a structured review of published small and medium-scale hydrodynamic tunnel designs.

Completed. A comprehensive literature review was carried out covering the theoretical basis and published design guidelines for all major tunnel components. Configuration selection was completed through a systematic comparison of circuit types and test section arrangements, culminating in the selection of a vertical, closed-loop circuit with a rectangular open-channel test section, as justified in Chapter 2.

Objective 2

To design all primary components of a small/medium-scale closed-loop hydrodynamic tunnel capable of delivering a design flow rate of $Q = 0.0136 \text{ m}^3/\text{s}$ through a $150 \text{ mm} \times 150 \text{ mm}$ open-channel test section, targeting a maximum Reynolds number of $Re \approx 8,000$ based on cylinder diameter as the characteristic length.

Completed. A substantial body of analytical calculations was carried out to determine the geometry and dimensions of every primary tunnel component, including the contraction profile, diffuser half-angles, settling chamber length, honeycomb cell dimensions, and 90° bend geometry. A MATLAB-based head loss model was developed to evaluate the total hydraulic resistance of the complete circuit and verify pump adequacy, confirming that the total system head loss of approximately 0.9 m is well within the available pump head of 9.14 m at the design flow rate. The full component design parameter summary is presented in Table 5.1.

Objective 3

To optimise the tunnel design using single-phase CFD simulation and FEA to achieve attached, uniform flow through the wide-angle diffuser and to ensure structural adequacy of all GFRP components under an internal operating pressure of 0.02 MPa.

Completed. A transient single-phase CFD simulation of the wide-angle diffuser was conducted in ANSYS Fluent, confirming severe flow separation within the 35° diverging geometry in the absence of internal guide vanes. This was resolved in simulation by introducing four guide vanes designed according to the Waitman, Reneau, and Kline recommendations, reducing the effective diffusion angle to 7° per channel. However, by the time the CFD results were obtained, the wide-angle diffuser had already been fully fabricated, making physical vane installation impractical within the project timeframe. Vane installation is therefore identified as a priority item in future work. FEA was conducted on the three primary GFRP components - the contraction section, the wide-angle diffuser, and the settling chamber - and revealed that the unreinforced 3 mm wall thickness produced peak Von Mises stresses exceeding the allowable limit of 60 MPa in all three cases. External wooden ribs and supplementary GFRP reinforcement layers were incorporated into all fabricated components in response.

Objective 4

To fabricate and assemble a fully operational hydrodynamic tunnel within the available project budget and timeframe, and to validate the test section flow quality through flow visualization across the Reynolds number range $Re = 0$ to 8,000.

Completed. All primary structural components were successfully fabricated within the project budget and timeframe using a combination of GFRP hand layup, acrylic sheet construction, FDM 3D printing, sheet metal fabrication, and mild steel box section welding. The support structure was designed as two independent adjustable sub-frames to facilitate transport and accommodate any dimensional variation arising from fabrication tolerances or gasket compression during assembly. The complete tunnel circuit, including all GFRP components, the acrylic test section, the 3D-printed PLA honeycomb, and the SOLEX SX318/3T centrifugal pump with its interconnecting uPVC pipework, was fully assembled and commissioned.

Initial testing was subsequently conducted, during which steady water flow was successfully established through the test section. The pump operated as expected with no mechanical vibrations, functioning within the designed 4–6 A Direct-On-Line (DOL) overload protection range. Minor leaks were identified at the honeycomb casing joints and selected pipeline connection points during the initial test run and were successfully rectified during the testing phase. Preliminary dye injection flow visualization was attempted using food colouring administered through syringe nozzles; however, consistent and repeatable results were not achieved within the project timeframe and this work is ongoing. Based on the observed steady flow behaviour in the test section, it is anticipated that the test section flow field is reasonably well-ordered, consistent with the design intent. Full flow visualization results are therefore reserved for future work as outlined in Section 6.4.



Figure 6.1: First assembly of tunnel components prior to pump and pipeline installation



Figure 6.2: Fully assembled hydrodynamic tunnel prior to testing



Figure 6.3: Tunnel during initial testing phase

6.2 Key Findings and Contributions

1. Optimal configuration selection framework for low-cost, laboratory-scale hydrodynamic tunnels: Finding 1.

A literature review revealed that the most promising configuration for a low-cost laboratory-scale facility was a vertical closed-loop circuit featuring a rectangular open channel test section. The selection was made based on the compact floor footprint, easy fabrication, optical access for flow visualization, and the desire to work in a low operating velocity range of $Re = 0 - 8,000$. The building of the evaluation framework in this study combining both qualitative and quantitative performance indices of published facilities offers a reusable tool in order to conduct decision making for future tunnel design projects. It is a reflection of the efforts put in by all three group members, H.M.D.A. Herath, P.M.J. Pathiraja and W.M.D.C. Weerakoon, who had done the literature review together and also had done the configuration selection process.

2. Finding 2 - Guide vane insertion is an effective solution to the problem of wide-angle diffuser flow separation:

CFD calculations show that the 35° wide-angle diffuser creates a considerable amount of flow separation without the addition of guide vanes, and without modification it is not suitable for use as a flow conditioner. Smooth, attached flow was achieved across the diffuser cross-section in simulation by introducing four guide vanes, with an effective diffusion angle of 7° per channel, and successfully suppressing separation. The design approach used by Waitman, Reneau and Kline is successfully validated at the laboratory level. The result was obtained from the CFD simulation studies performed by P.M.J. Pathiraja who designed the wide-angle diffuser, calculated the transition section and conducted all the CFD analysis presented in this study.

3. Conclusions from the finding: finding 3 - Smooth internal surface finish possible with glass-surface hand layup in low-cost, medium-scale hydrodynamic tunnels:

As the GFRP laminate is laid directly on a flat glass plate serving as a mould, a smooth surface finish of the inner surface was obtained for all flat-panel components, without the need for using expensive CNC machined moulds. This is especially important for hydrodynamic tunnel fabrication, as the rougher the inside surfaces the more it will influence the development of the boundary layer and flow quality within the test section. It is shown that acceptable surface finish can be achieved with simple low cost tooling in a resource constrained University workshop and is suggested as an appropriate fabrication process for future low cost medium scale hydrodynamic tunnel projects. This result was a result of the GFRP fabrication work conducted by W.M.D.C where all component was designed using GFRP, finite element analysis and model development of head loss model was performed using MATLAB software.

4. The 3D printed PLA honeycomb is a practical and inexpensive alternative solution for a flow straightening application in resource limited environments:

Commercial honeycomb sections with desired cross section were not available in the local market, so a more suitable one had to be fabricated. In 3D printing, PLA was used to successfully produce a 4-piece piece of a honeycomb flow straightener. 4-piece PLA body of a honeycomb flow straightener successfully produced. In conclusion, this indicates that 3D printing is a viable and attainable alternative to commercial honeycomb in low-cost projects of hydrodynamic tunnels, especially in low resource areas where specialists components are not readily available. H.M.D.A. Herath designed and fabricated the honeycomb and the test section design, and the supporting structure.

5. It is found that the flow separation in wide-angle diffusers can only be captured by conducting transient CFD simulation.

The wide-angle diffuser case was simulated in a transient manner, and a separated shear layer and recirculation zone were observed to be unstable and oscillatory in this geometry. This behaviour could not have been captured in a steady state RANS simulation, potentially leading to a lack of design response and underestimation of the severity of separation. It is important to note from this finding that a transient simulation approach should be used when examining wide angle diffuser geometries in hydrodynamic tunnel design.

6. Contribution - Sri Lanka's first hydrodynamic tunnel, successful demonstration of the flow and design framework for a consolidated design:

This project resulted in the first hydrodynamic tunnel that was designed and fabricated in Sri Lanka, which was a gap in the experimental fluid dynamics facilities in the University of Moratuwa. The facility was successfully commissioned and dye injection flow visualization showed well-ordered coherent flow in the test section, with clear separation between the dye and the surrounding flow around the cylindrical test model, confirming the flow conditions that the tunnel produces are suitable for fundamental fluid dynamics experimentation. The project also documents the full design process from initial selection of configuration to design of the components, CFD optimisation, structural analysis to physical fabrication, all of which can be applied to small/medium scale hydrodynamic tunnel development in a real-world budget, space and material constraint. The three all helped in manufacturing the components and putting it together, H.M.D.A. Herath, P.M.J. Pathiraja and W.M.D.C. Weerakoon.



Figure 6.4: Dye injection flow visualization showing coherent dye streak in test section



Figure 6.5: Dye separation around cylindrical test model observed during flow visualization

6.3 Limitations and Self-Critical Evaluation

To be updated

6.4 Recommendations for Future Work

Based on the outcomes of the design, fabrication, and initial testing phases, the following improvements and additions are recommended for the continued development of the hydrodynamic tunnel facility:

a. Install flanged connections on the modular pipeline:

The structure of the pipeline did not support the modular design with two separate pipeline halves because the necessary connecting flanges to join the two pipeline halves at the split point could not be sourced locally within the project delivery timeframe. Ideal flanged pipe couplings are recommended to be procured internationally or custom fabricated, and installed to complete the modular pipeline connection. This will enable easy separation and reassembly of the two sub-frames for transport, reconfiguration or dimensional changes.

b. Install and connect the hydrogen bubble flow visualization system;

As the project was designed and planned, a hydrogen bubble flow visualization setup was designed but not commissioned during the available time frame. The installation of the electrode wire, DC power supply and electrical circuit to the test section is recommended to be a priority so that a systematic quantitative flow visualization can be performed over the entire Reynolds number range of $Re = 0$ to 8,000. This will enable to see and document the transitions in flow regimes around the cylindrical test model directly.

c. Produce and fit a firm and safe mechanical tie between the two sub frames:

The two mild steel sub-frames are located side by side at present with no formal locking and connection mechanism. A stable bolted/pinned connection system should be designed and fabricated to maintain a rigid connection between the two sub-frames during operation to prevent any relative motion or misalignment when dealing with pump induced vibration and hydraulic loading.

d. Substitute the 3D printed PLA honeycomb with a precisely made one:

The current honeycomb flow straightener is a 3D printed version of PLA as it was not possible to purchase locally honeycomb sections of the necessary size. The aluminium or stainless steel honeycomb should be manufactured from a precision-manufactured international honeycomb manufacturer to ensure the best flow conditioning performance, with the exact specified cell diameter of 10 mm, cell wall thickness, and the entire length of the design. This will ensure the L/D ratio of the honeycomb is in the recommended range of 6-10 and make the flow more uniform in the test section.

e. Use a Variable Frequency Drive (VFD) to operate the pumps at variable speeds:

This tunnel is currently only run at one fixed flow velocity, so there is only one Reynolds number condition for experimentation. The SOLEX SX318/3T pump motor is recommended to be installed with a Variable Frequency Drive for continuous variable speed operation over a broad flow rate range. This would enable systematic Reynolds number sweeps to be performed without any physical change to the circuit and extend the experimental capability of the facility greatly.

f. Fit splitter vanes in the wide angle diffuser:

The 35° wide-angle diffuser was found to result in considerable flow separation, as verified by CFD analysis without any internal guide vanes installed. In this project the proposed vane design by the Waitman, Reneau and Kline was developed and validated in simulation, but was not actually installed because fabrication was complete prior to the receipt of the CFD results. Installation of splitter vanes, four in number, with an effective diffusion angle of 7° per vane is highly recommended as the single most important aerodynamic modification that can be made to the tunnel circuit, and the geometry and parameters for each vane are fully and clearly described in Table 21 of this report.

7 References

- [1] J. H. Bell and R. D. Mehta, "Contraction design for small low-speed wind tunnels," Dept. Aeronaut. Astronaut., Stanford Univ., Stanford, CA, USA, Rep. JIAA TR-84 / NASA-CR-182747, 1988.


- [2] I. Nedyalkov, "Design of contraction, test section, and diffuser for a high-speed water tunnel," M.S. thesis, Dept. Appl. Mech., Chalmers Univ. Technol., Gothenburg, Sweden, 2012.
- [3] J. E. Sargison, A. F. Barton, G. J. Walker, and P. A. Brandner, "Design and calibration of a water tunnel for skin friction research," *Aust. J. Mech. Eng.*, vol. 7, no. 2, pp. 111-124, 2009, doi: 10.1080/14484846.2009.11464585.
- [4] M. Saeed, E. Uddin, A. Mubashar, S. U. Zahir, and A. A. Zaidi, "Design and development of low-speed water tunnel," in *Proc. 15th Int. Bhurban Conf. Appl. Sci. Technol. (IBCAST)*, Islamabad, Pakistan, Jan. 2018, pp. 614-619, doi: 10.1109/IBCAST.2018.8312288.
- [5] F. Surahmanto, D. Adityantoro, and A. R. Satria, "Laboratory-scale low-speed water tunnel: Comparison of experimental flow visualization and computer-aided simulation," *J. Adv. Res. Fluid Mech. Therm. Sci.*, vol. 107, no. 1, pp. 142-164, 2023, doi: 10.37934/arfmts.107.1.142164.
- [6] M. A. Oyeyemi, "The design and qualification of the UGA water tunnel," M.S. thesis, Univ. Georgia, Athens, GA, USA.
- [7] R. J. Etter, J. M. Cutbirth, S. L. Ceccio, D. R. Dowling, and M. Perlin, "High Reynolds number experimentation in the US Navy's William B Morgan Large Cavitation Channel," *Meas. Sci. Technol.*, vol. 16, no. 9, pp. 1701-1709, 2005, doi: 10.1088/0957-0233/16/9/001.
- [8] B. R. Elbing, L. Daniel, Y. Farsiani, and C. E. Petrin, "Design and validation of a recirculating, high-Reynolds number water tunnel," *J. Fluids Eng.*, vol. 140, no. 8, p. 081102, Aug. 2018, doi: 10.1115/1.4039509.
- [9] D. L. Cochran and S. J. Kline, "Use of short flat vanes for producing efficient wide-angle two-dimensional subsonic diffusers," *Nat. Advisory Committee Aeronaut., Tech. Note* 4309, 1958.
- [10] J. L. Lumley and J. F. McMahon, "Reducing water tunnel turbulence by means of a honeycomb," *J. Basic Eng.*, vol. 89, no. 4, pp. 764-770, Dec. 1967, doi: 10.1115/1.3609700.

- [11] L. R. Reneau, J. P. Johnston, and S. J. Kline, "Performance and design of straight two-dimensional diffusers," *J. Basic Eng.*, vol. 89, no. 1, pp. 141-150, Mar. 1967, doi: 10.1115/1.3609544.
- [12] B. A. Waitman, L. R. Reneau, and S. J. Kline, "Effects of inlet conditions on performance of two-dimensional subsonic diffusers," *J. Basic Eng.*, vol. 83, no. 3, pp. 349-360, Sep. 1961, doi: 10.1115/1.3658953.
- [13] P. Bradshaw and R. C. Pankhurst, "The design of low-speed wind tunnels," *Prog. Aerosp. Sci.*, vol. 5, pp. 1-69, 1964, doi: 10.1016/0376-0421(64)90003-X.
- [14] F. R. Menter, "Two-equation eddy-viscosity turbulence models for engineering applications," *AIAA J.*, vol. 32, no. 8, pp. 1598-1605, Aug. 1994, doi: 10.2514/3.12149.
- [15] E. Alvarez-Alvarez, M. Rico-Secades, A. Fernandez-Jimenez, R. Espina-Valdes, E. L. Corominas, and A. J. Calleja-Rodriguez, "Hydrodynamic water tunnel for characterization of hydrokinetic microturbines designs," *Clean Technol. Environ. Policy*, vol. 22, no. 9, pp. 1843-1854, Nov. 2020, doi: 10.1007/s10098-020-01924-w.
- [16] M. Zahari and S. S. Dol, "Design and development of low-cost water tunnel for educational purpose," *IOP Conf. Ser. Mater. Sci. Eng.*, vol. 78, p. 012040, Apr. 2015, doi: 10.1088/1757-899X/78/1/012040.
- [17] S. Ristic, "Flow visualization - a view in the invisible," *Theor. Appl. Mech.*, vol. 40, no. 1, pp. 87-119, 2013, doi: 10.2298/TAM1301087R.
- [18] Y. Jiang, C. Gao, Z. Geng, and C. Chen, "The hydrodynamic design and critical techniques for 1m x 1m water tunnel," *AIP Conf. Proc.*, vol. 1955, no. 1, p. 030038, 2018, doi: 10.1063/1.5033637.
- [19] R. Koirala, "Sediment erosion and its effect on guide vanes of Francis turbine," M.S. thesis, Dept. Mech. Eng., Kathmandu Univ., Dhulikhel, Nepal, 2017.
- [20] L. Wang, F. Shi, Z. Wang, and S. Liang, "Blockage effects in wind tunnel tests for tall buildings with surrounding buildings," *Appl. Sci.*, vol. 12, no. 14, p. 7087, 2022, doi: 10.3390/app12147087.
- [21] B. D. Agarwal, L. J. Broutman, and K. Chandrashekhara, *Analysis and Performance of Fiber Composites*, 3rd ed. Hoboken, NJ, USA: Wiley, 2006.


- [22] Dassault Systemes, Abaqus Analysis User's Guide, Version 6.14. Providence, RI, USA: Dassault Systemes Simulia Corp., 2014.
- [23] S. P. Timoshenko and S. Woinowsky-Krieger, Theory of Plates and Shells, 2nd ed. New York, NY, USA: McGraw-Hill, 1959.

8 Appendices

8.1 Appendix 1 – technical drawings

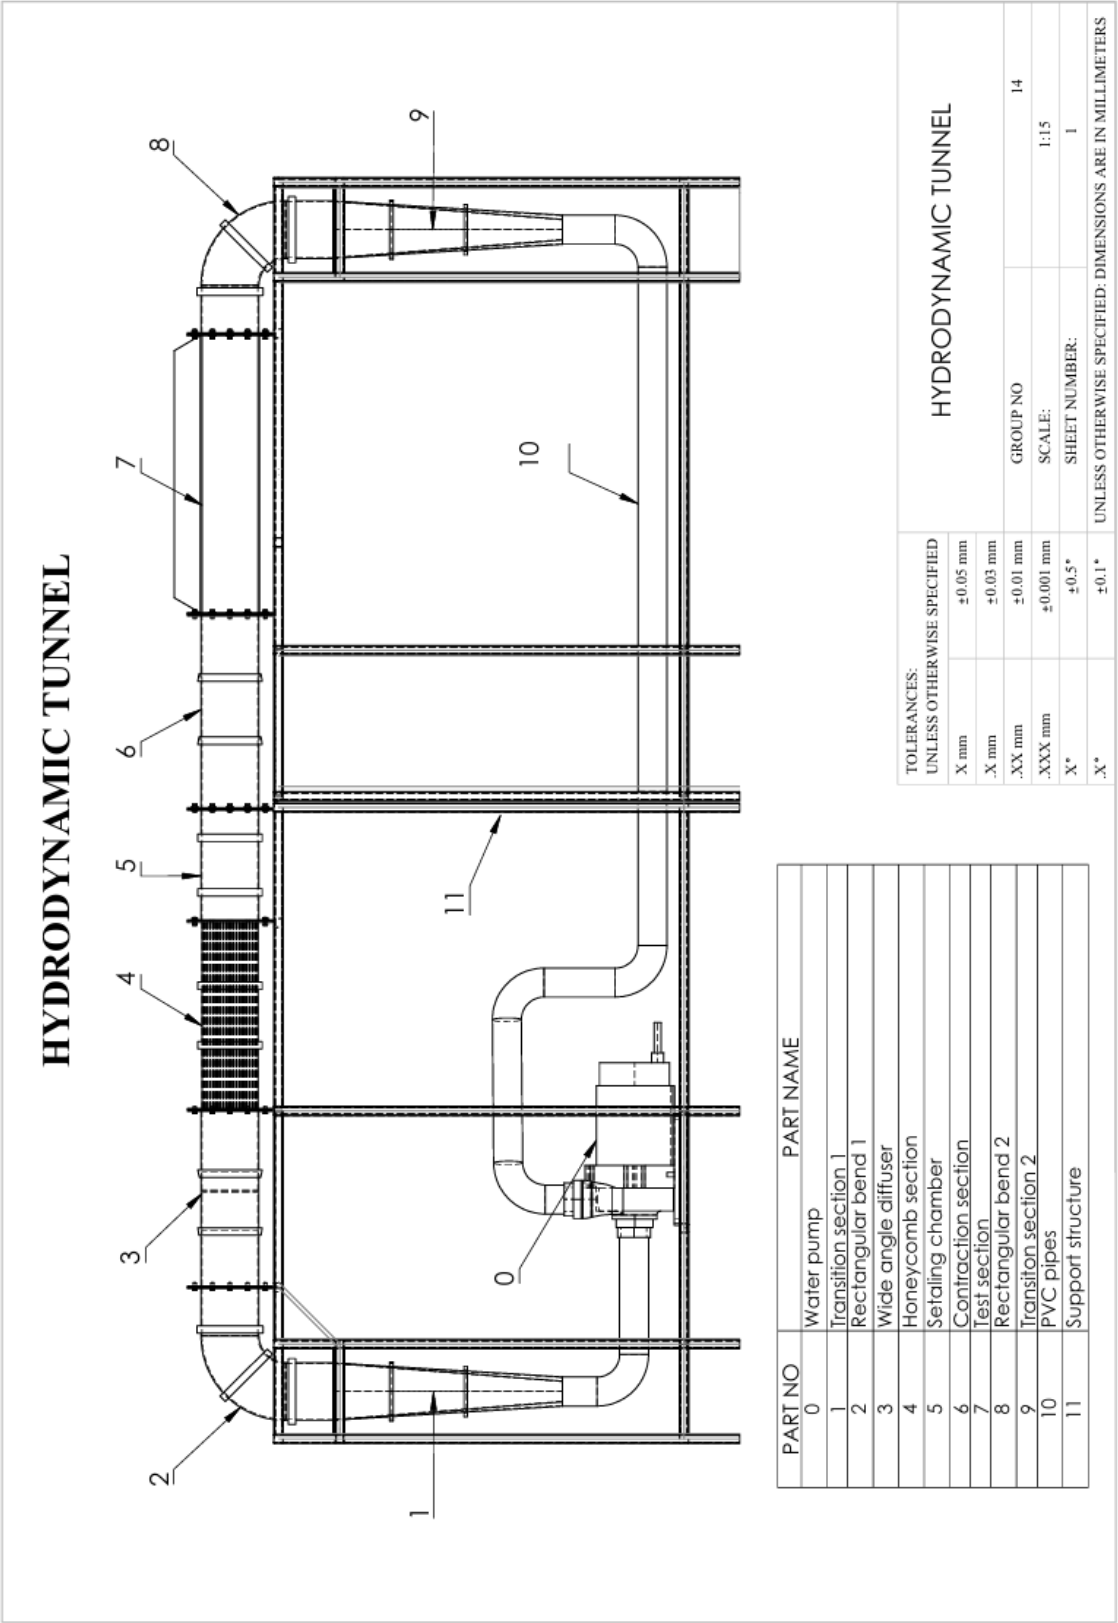


HYDRODYNAMIC TUNNEL

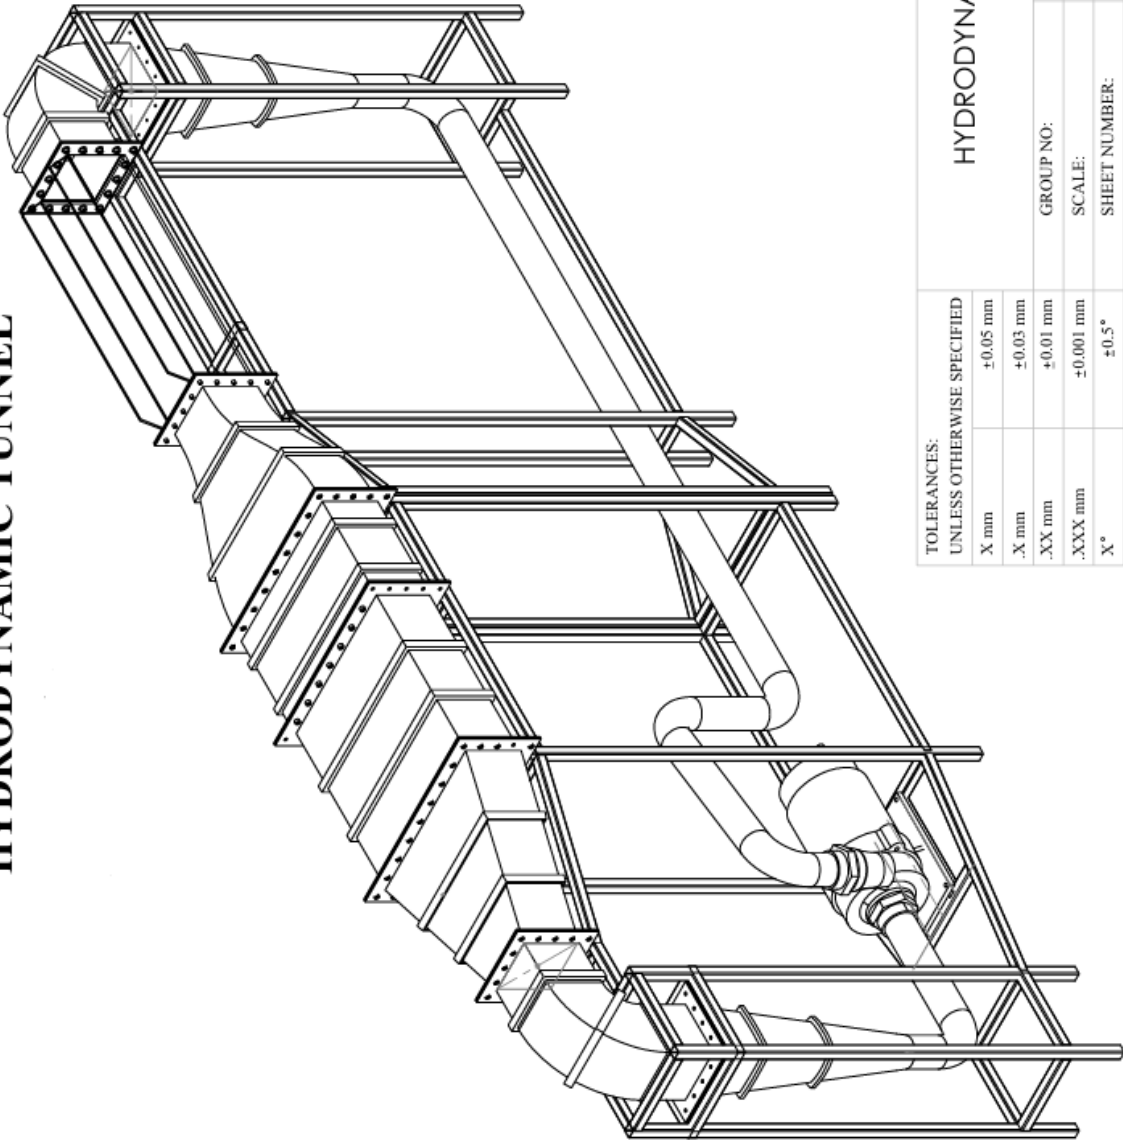


TOLERANCES: UNLESS OTHERWISE SPECIFIED		HYDRODYNAMIC TUNNEL		
X mm	±0.05 mm			
.X mm	±0.03 mm			
.XX mm	±0.01 mm	GROUP NO:		14
.XXX mm	±0.001 mm	SCALE:		1:14
X°	±0.5°	SHEET NUMBER:		2
.X°	±0.1°	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS		


VERTICAL TRANSITION SECTION

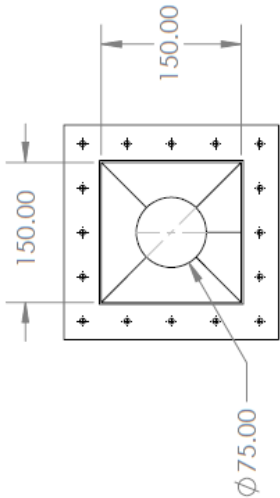


FRONT ELEVATION

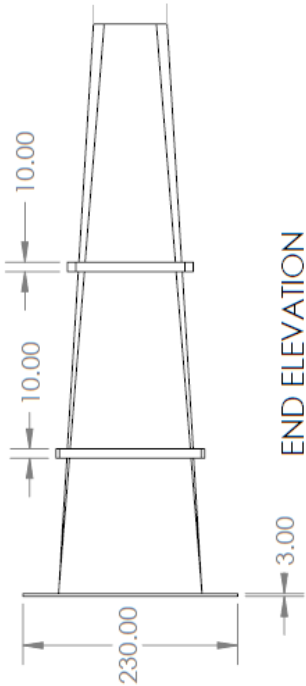

END ELEVATION

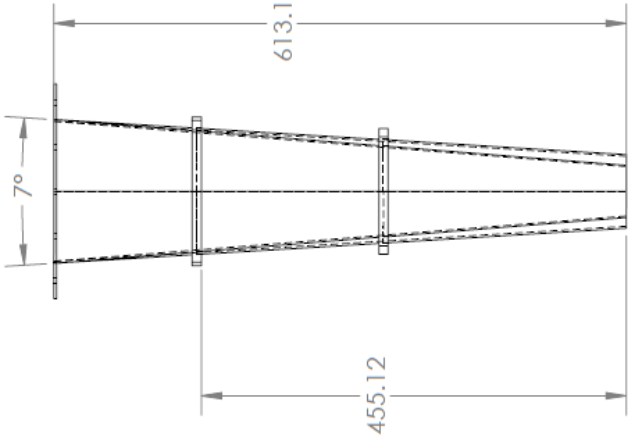


PLAN ELEVATION

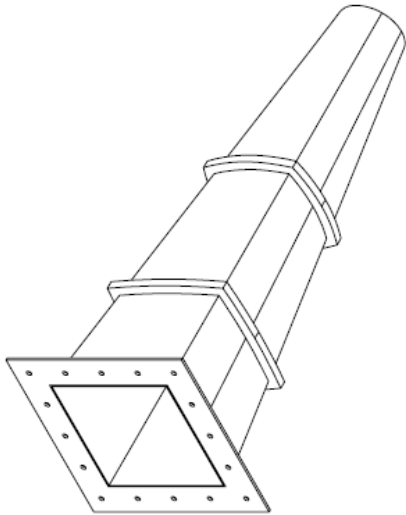

ISOMETRIC VIEW




TOLERANCES: UNLESS OTHERWISE SPECIFIED		VERTICAL TRANSITION SECTION		
X mm	±0.05 mm			
X mm	±0.03 mm			
XX mm	±0.01 mm	MATERIAL:	Glass Fiber	
XXX mm	±0.001 mm	SCALE:	1:10	
X°	±0.5°	PART NUMBER:	1	
X°	±0.1°	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS		

RECTANGULAR BEND

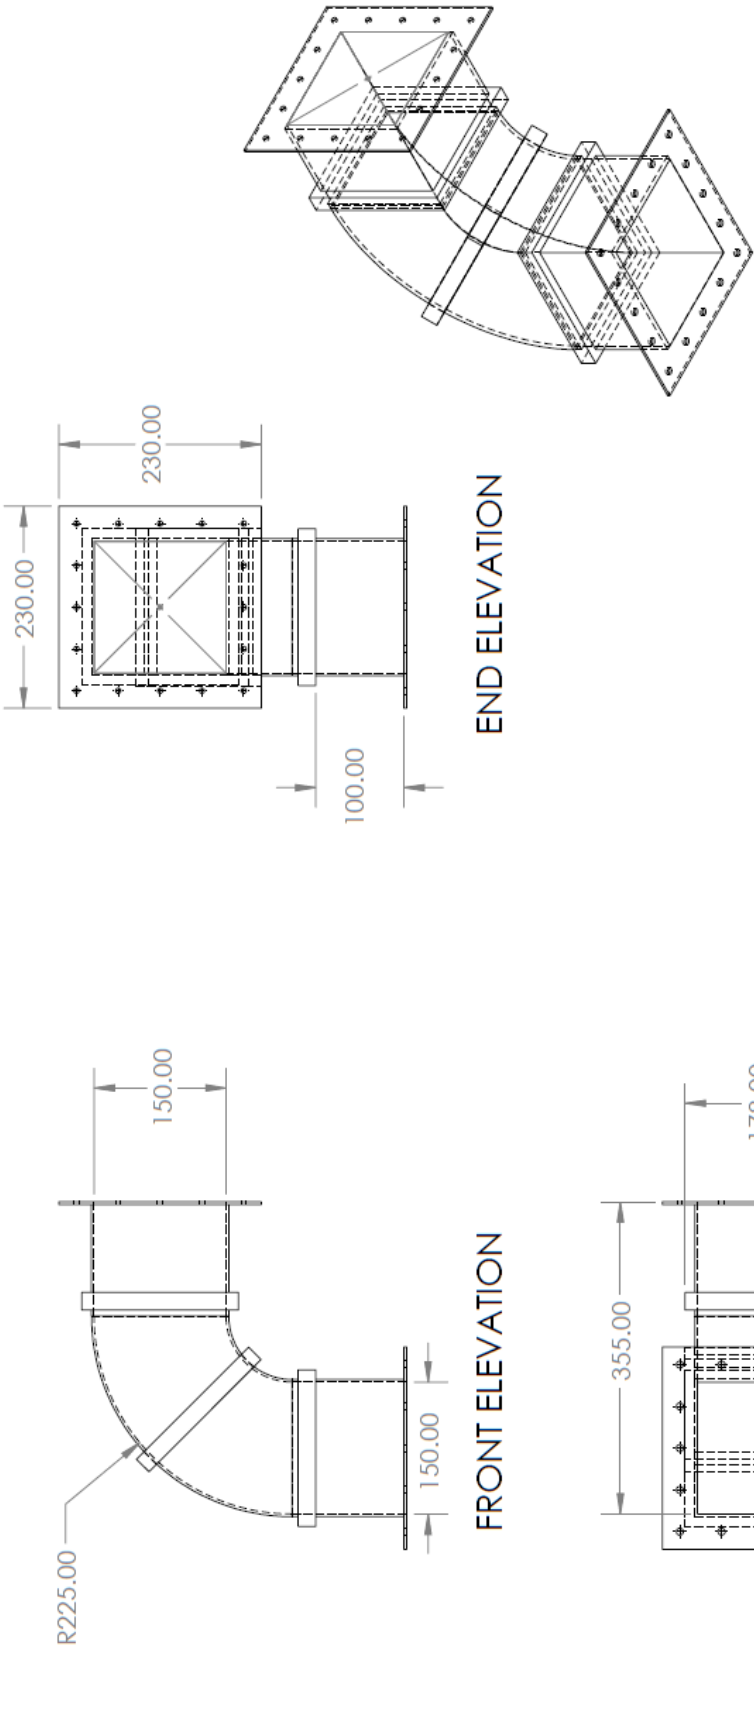


TOLERANCES: UNLESS OTHERWISE SPECIFIED		RECTANGULAR BEND		
X mm	± 0.05 mm			
X mm	± 0.03 mm			
XX mm	± 0.01 mm		MATERIAL:	Glass Fiber
XXX mm	± 0.001 mm		SCALE:	1:7
X°	$\pm 0.5^\circ$		PART NUMBER:	2
X°	$\pm 0.1^\circ$		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS	

WIDE ANGLE DIFFUSER

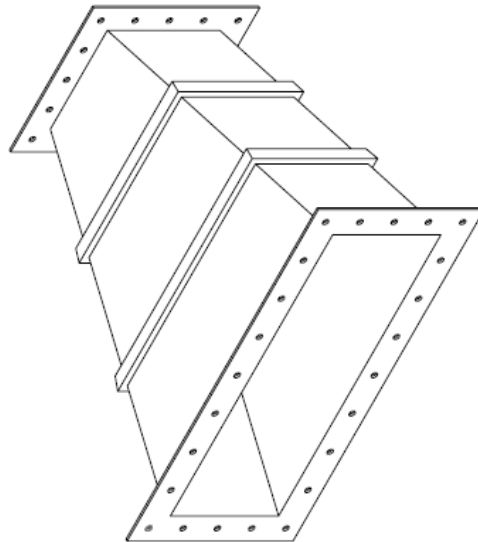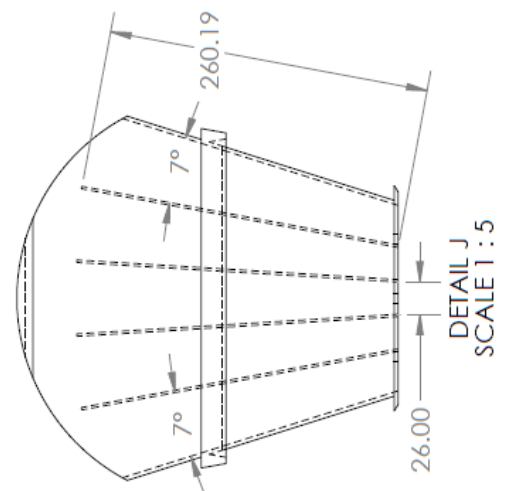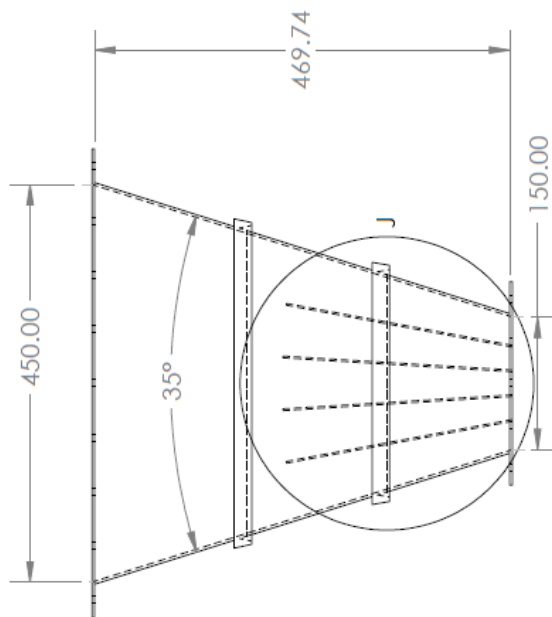


TOLERANCES: UNLESS OTHERWISE SPECIFIED		WIDE ANGLE DIFFUSER	
X mm	±0.05 mm	MATERIAL: SCALE: PART NUMBER:	Glass Fiber 1:7 3
X mm	±0.03 mm		
.XX mm	±0.01 mm		
.XXX mm	±0.001 mm		
X°	±0.5°	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS	
X°	±0.1°		



HONEYCOMB STRUCTURE

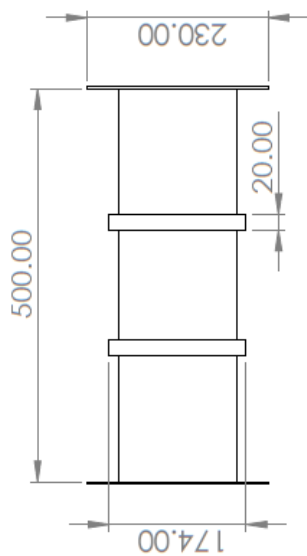


END ELEVATION

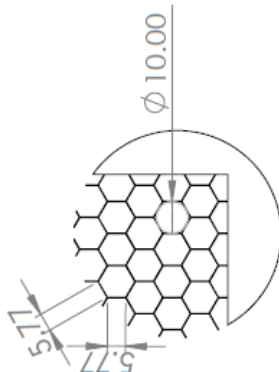

FRONT ELEVATION

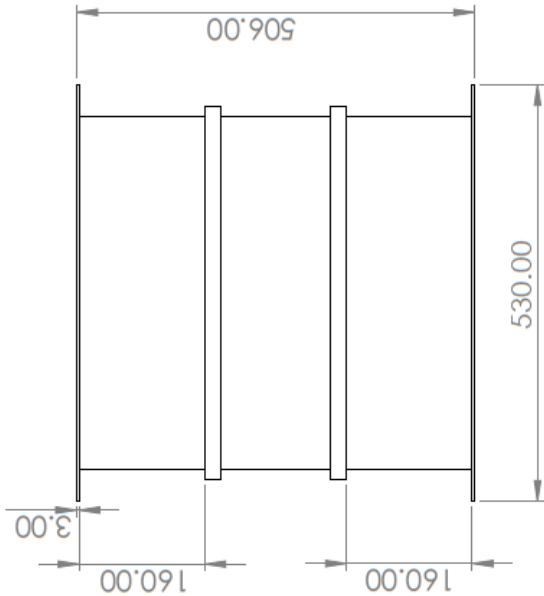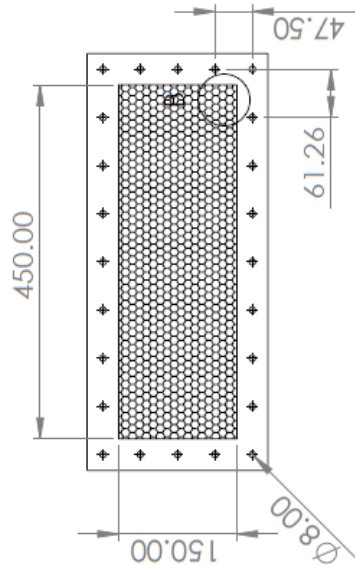


PLAN

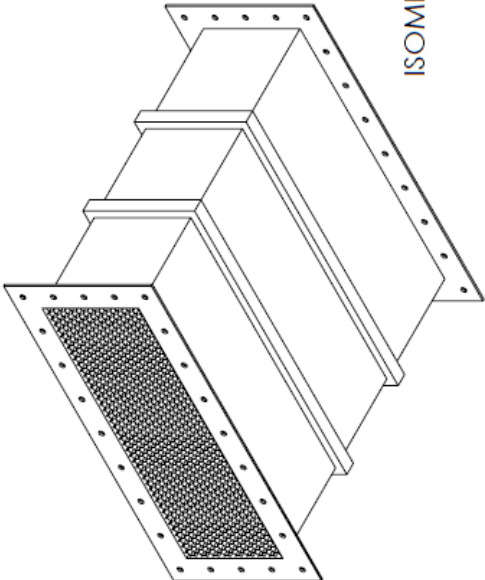


ISOMETRIC VIEW

TOLERANCES: UNLESS OTHERWISE SPECIFIED		HYDRODYNAMIC TUNNEL	
X mm	±0.05 mm	MATERIAL:	ALUMINIUM SHEETS
X mm	±0.03 mm		
.XX mm	±0.01 mm		
.XXX mm	±0.001 mm	SCALE:	1:8
X°	±0.5°	SHEET NUMBER:	1
X°	±0.1°	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS	


SETTLING CHAMBER

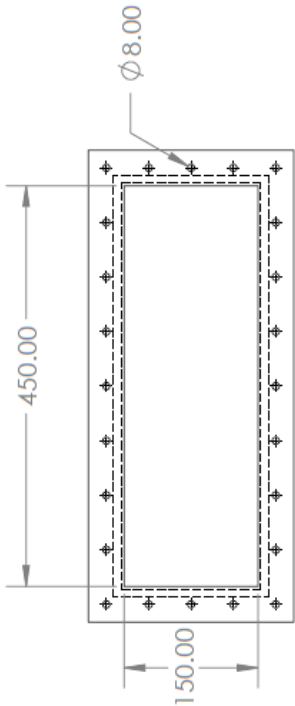


FRONT ELEVATION

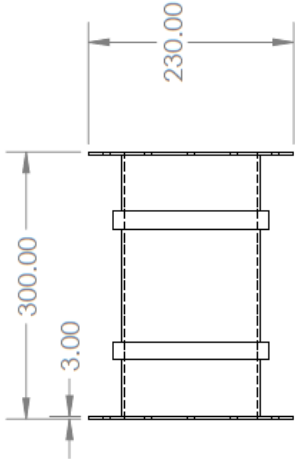

END ELEVATION

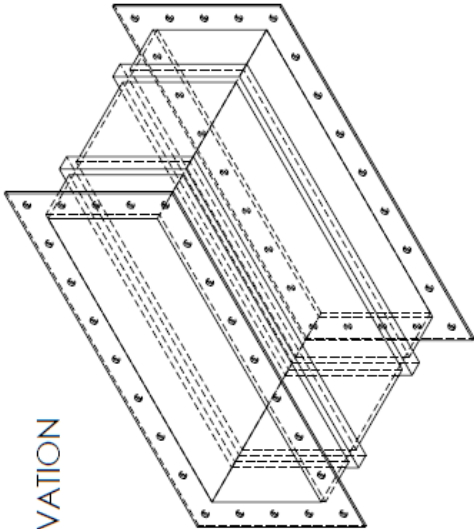



ISOMETRIC VIEW

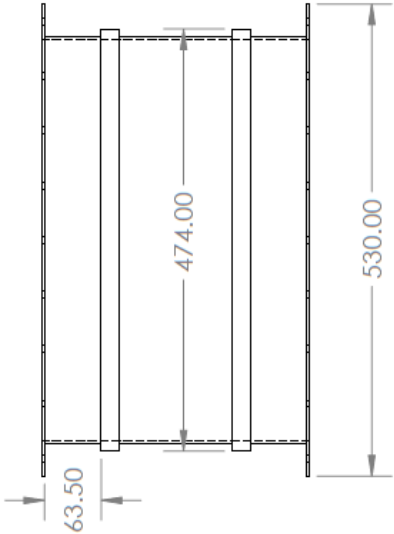

PLAN ELEVATION

TOLERANCES: UNLESS OTHERWISE SPECIFIED		SETTLING CHAMBER		
X mm	±0.05 mm			
X mm	±0.03 mm			
XX mm	±0.01 mm	MATERIAL:	Glass Fiber	
XXX mm	±0.001 mm	SCALE:	1:7	
X°	±0.5°	PART NUMBER:	5	
X°	±0.1°	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS		

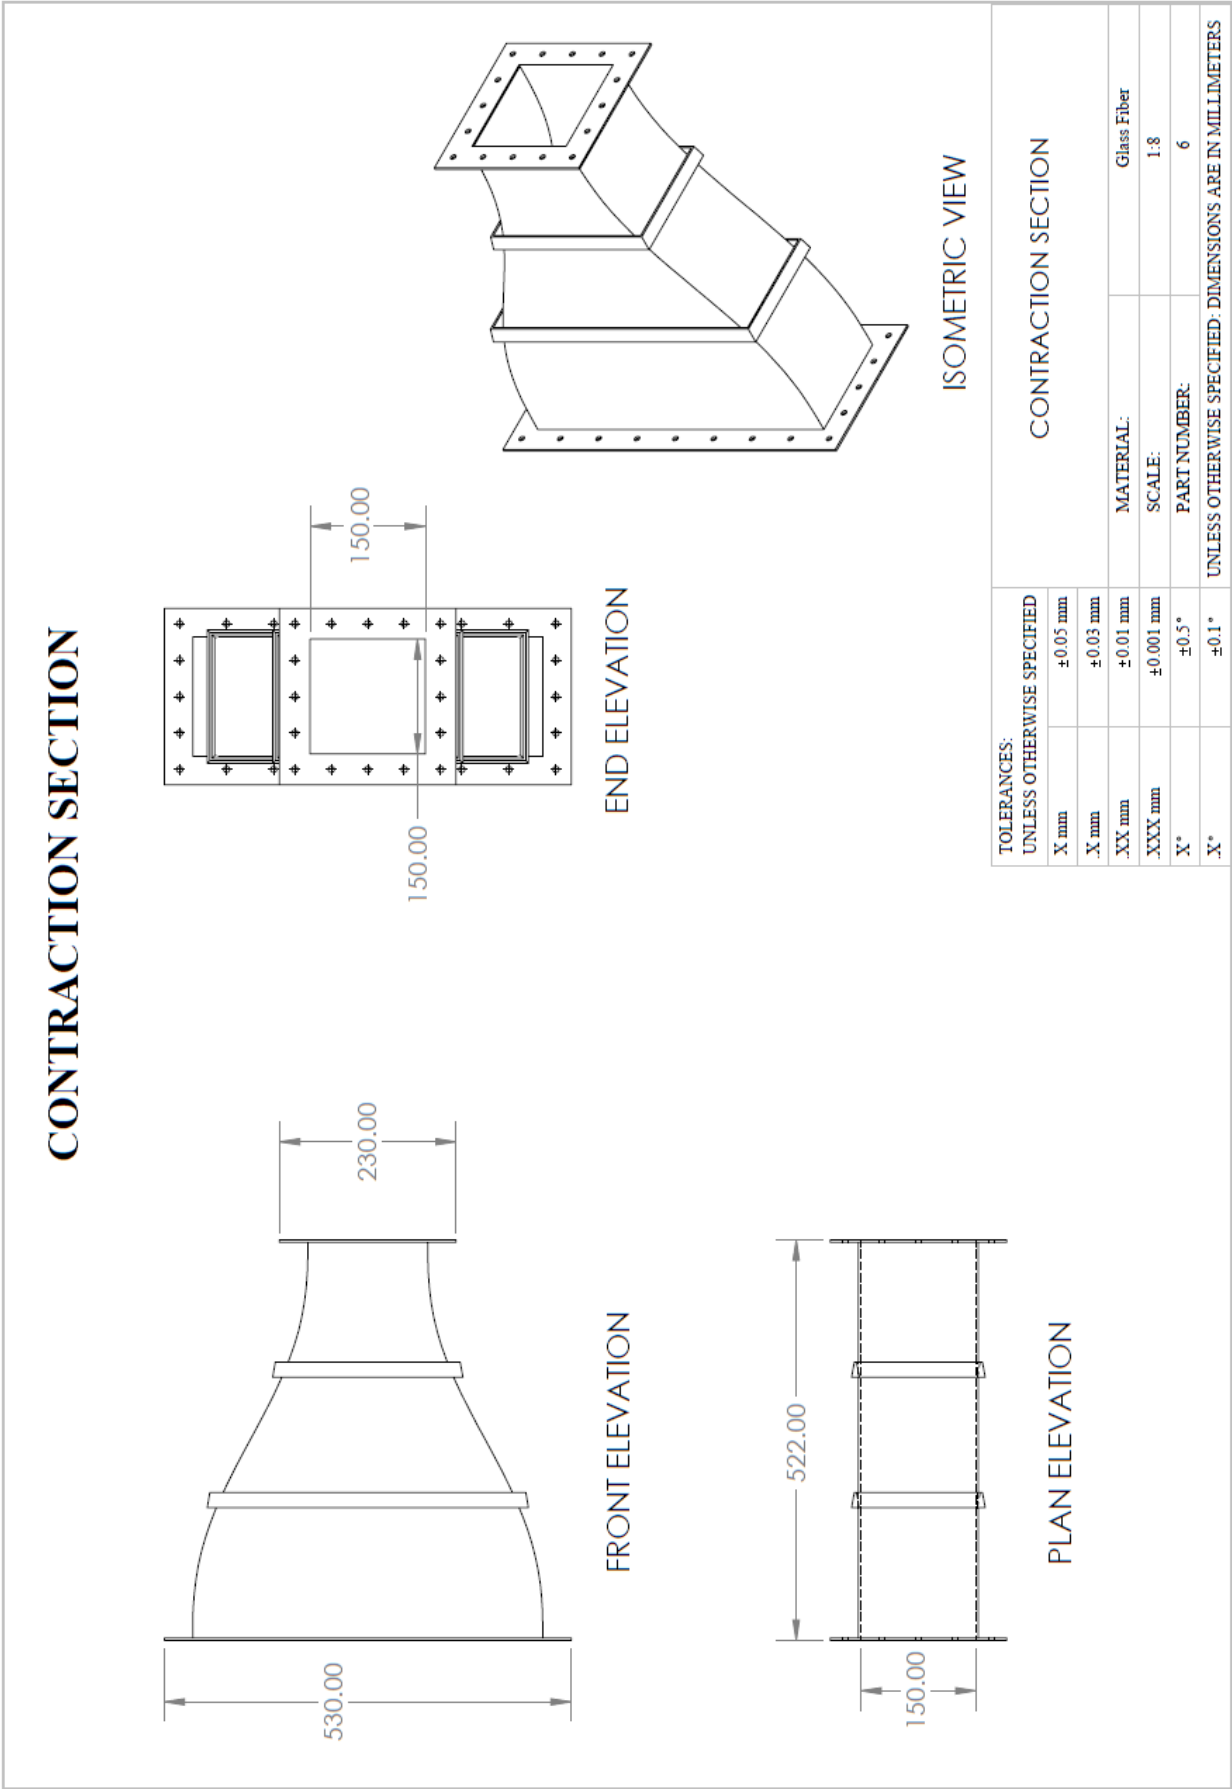

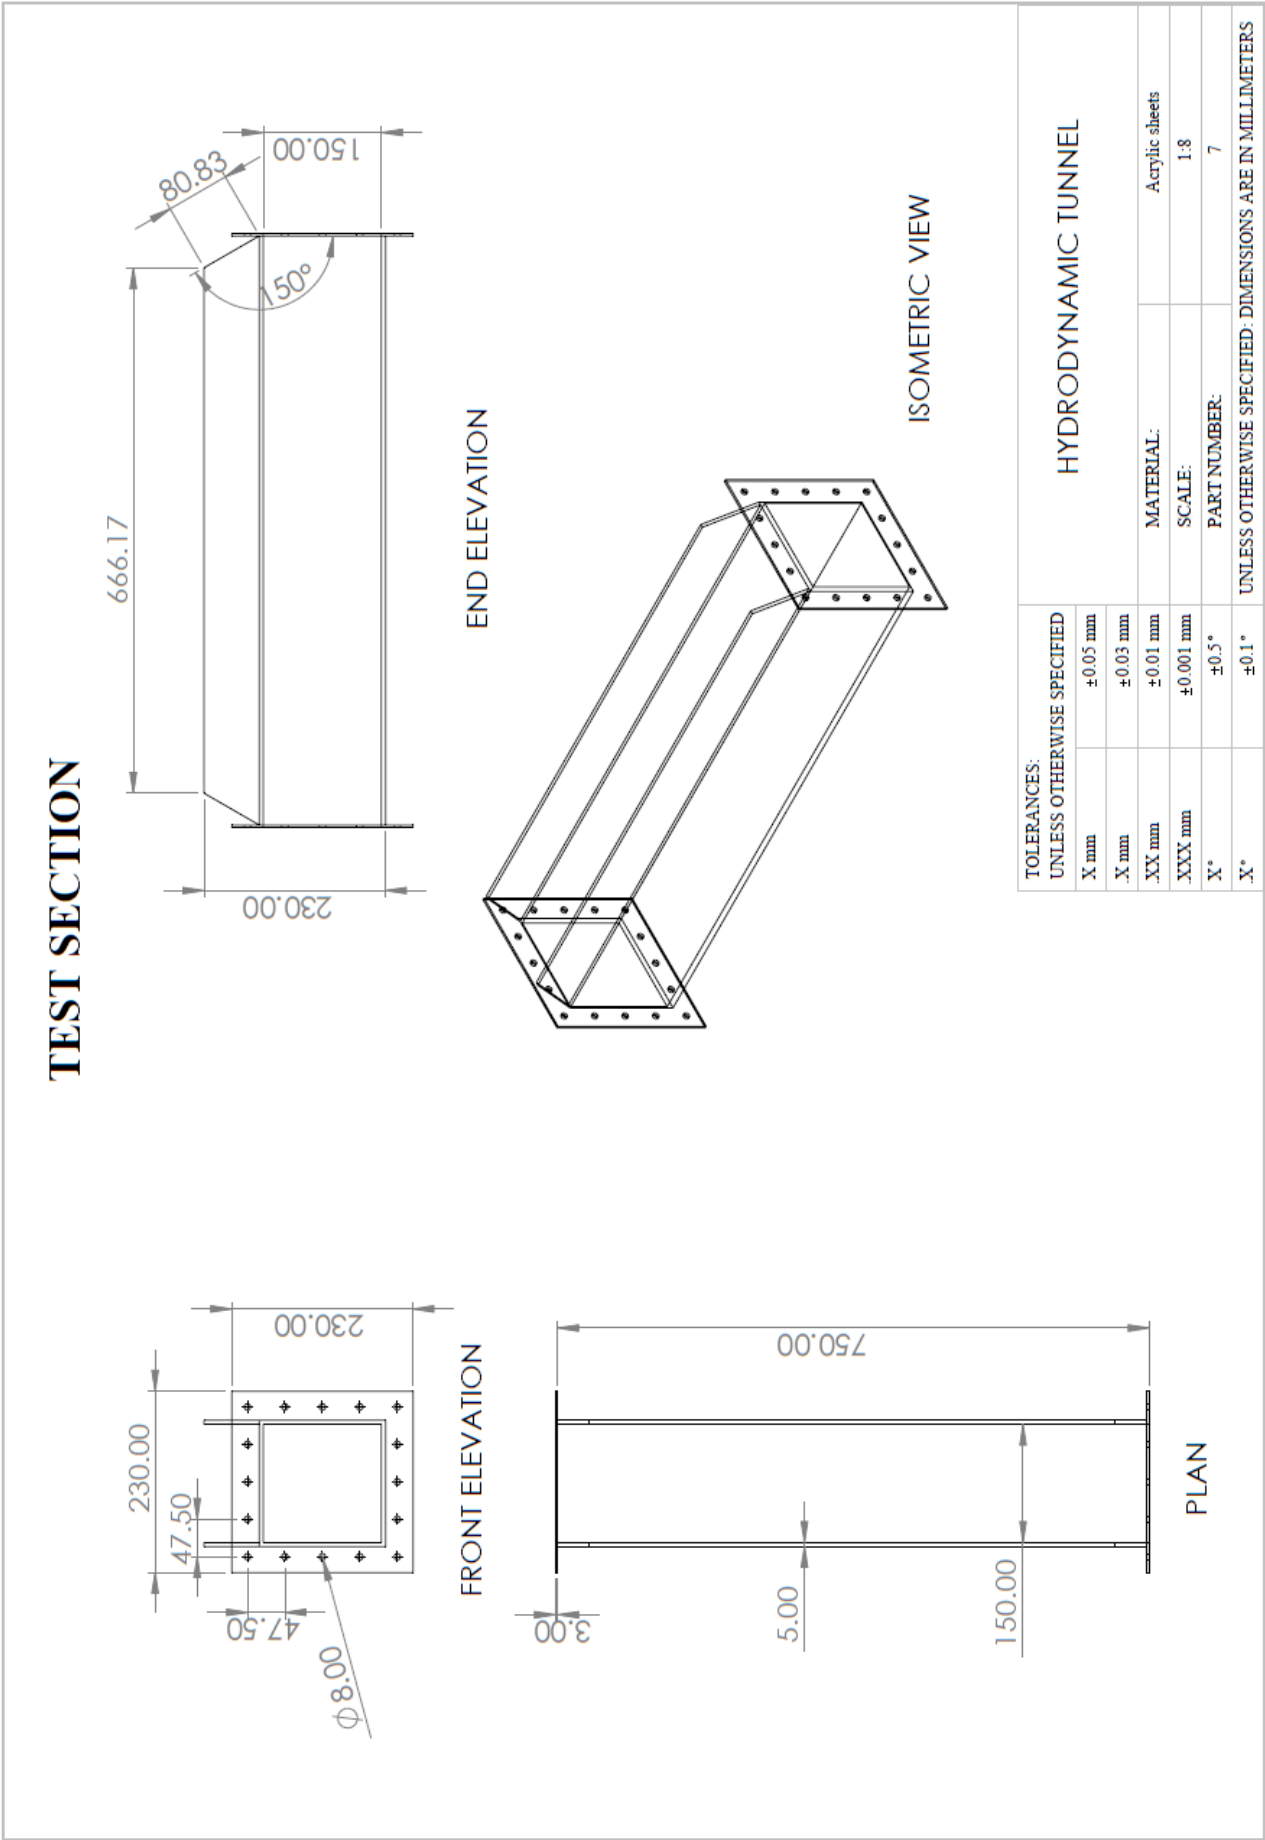

8.2 Appendix 2- Head loss calculation model

```

clc; clear;

%% =====
% HYDRODYNAMIC TUNNEL - HEAD LOSS CALCULATOR
% SOLEX SX318/3T Pump | All dimensions pre-defined
% NOTE: Honeycomb length = 250mm (fabricated, reduced from 500mm)
%       Test section length = 800mm (actual design takes 750mm)
%% =====

%% ---- FLUID PROPERTIES (water at 20°C) ----
rho = 1000;          % kg/m³
nu  = 1.004e-6;      % m²/s
g   = 9.81;          % m/s²

%% ---- PUMP OPERATING POINT ----
H_pump = 9.144;          % m (30 ft - SOLEX SX318/3T)
Q       = 10500 * 0.00378541 / 3600; % m³/s (10500 GPH → m³/s)
fprintf('Design flow rate: Q = %.5f m³/s\n\n', Q);

%% ---- SURFACE ROUGHNESS ----
eps_PVC = 0.0015e-3; % m - smooth uPVC pipe
eps_GFRP = 0.0015e-3; % m - GFRP on glass mold (hydraulically smooth)

%% ---- CROSS-SECTIONAL AREAS ----
A_pipe = pi * 0.075² / 4; % 75mm circular pipe
A_ts   = 0.150 * 0.150; % 150×150mm (test section, bends)
A_sc   = 0.450 * 0.150; % 450×150mm (settling chamber, wide diffuser
outlet)
A_vd   = (A_pipe + A_ts) / 2; % mean area through vertical diffuser

%% ---- HYDRAULIC DIAMETERS ----
Dh_pipe = 0.075;
Dh_ts   = 0.150; % square duct: Dh = side
length
Dh_sc   = 4*A_sc / (2*(0.450 + 0.150)); % = 0.225 m
Dh_hc   = 0.010; % honeycomb cell diameter
Dh_vd   = (Dh_pipe + Dh_ts) / 2; % mean Dh through vertical
diffuser
Dh_wad   = (Dh_ts + Dh_sc) / 2; % mean Dh through wide-angle
diffuser
Dh_con   = (Dh_sc + Dh_ts) / 2; % mean Dh through
contraction

%% ---- FLOW VELOCITIES ----
V_pipe = Q / A_pipe; % in 75mm pipe sections
V_ts   = Q / A_ts; % in 150×150mm sections
V_sc   = Q / A_sc; % in 450×150mm sections
V_vd   = Q / A_vd; % mean velocity in vertical diffuser
V_wad   = Q / ((A_ts + A_sc)/2); % mean velocity in wide-angle diffuser
V_con   = Q / ((A_sc + A_ts)/2); % mean velocity in contraction

fprintf('--- Flow Velocities ---\n');
fprintf(' V_pipe (75mm): %.4f m/s\n', V_pipe);
fprintf(' V_ts (150×150mm): %.4f m/s\n', V_ts);
fprintf(' V_sc (450×150mm): %.4f m/s\n\n', V_sc);

%% ---- REYNOLDS NUMBERS ----

```

```

Re_pipe = V_pipe * Dh_pipe / nu;
Re_ts   = V_ts   * Dh_ts   / nu;
Re_sc   = V_sc   * Dh_sc   / nu;
Re_hc   = V_sc   * Dh_hc   / nu;    % bulk velocity, cell diameter
Re_vd   = V_vd   * Dh_vd   / nu;
Re_wad   = V_wad  * Dh_wad  / nu;
Re_con  = V_con  * Dh_con  / nu;

%% ---- FRICTION FACTORS (Swamee-Jain approximation) ----
swjain = @(Re, eps, Dh) 0.25 ./ (log10(eps./(3.7.*Dh) + 5.74./Re.^0.9)).^2;

f_pipe = swjain(Re_pipe, eps_PVC, Dh_pipe);
f_ts   = swjain(Re_ts,   eps_GFRP, Dh_ts);
f_sc   = swjain(Re_sc,   eps_GFRP, Dh_sc);
f_vd   = swjain(Re_vd,   eps_GFRP, Dh_vd);
f_wad  = swjain(Re_wad,   eps_GFRP, Dh_wad);
f_con  = swjain(Re_con,   eps_GFRP, Dh_con);

% Honeycomb: laminar flow in small cells
if Re_hc < 2300
    f_hc = 64 / Re_hc;
    hc_regime = 'laminar';
else
    f_hc = swjain(Re_hc, eps_GFRP, Dh_hc);
    hc_regime = 'turbulent';
end

fprintf('--- Friction Factors ---\n');
fprintf(' f_pipe = %.4f (Re = %.0f)\n', f_pipe, Re_pipe);
fprintf(' f_ts   = %.4f (Re = %.0f)\n', f_ts,   Re_ts);
fprintf(' f_sc   = %.4f (Re = %.0f)\n', f_sc,   Re_sc);
fprintf(' f_hc   = %.4f (Re = %.0f) [%s]\n\n', f_hc, Re_hc, hc_regime);

%% ---- MINOR LOSS COEFFICIENTS ----
K_elbow = 0.9;    % standard PVC 90° screwed elbow
K_bend  = 1.2;    % mitered 90° GFRP bend, no vanes
K_wad   = (1 - A_ts/A_sc)^2; % Borda-Carnot (no vanes, sudden expansion approx)
K_cont  = 0.04;   % Bell-Mehta contraction profile (from literature)
K_conv  = 0.04;   % converging return diffuser (nozzle-type)

%% ---- DIFFUSER LENGTHS (from half-angle geometry) ----
% Vertical expanding diffuser: 75mm circular → 150×150mm square, 7° half-angle
r_in_vd = 0.075/2;
r_out_vd = sqrt(A_ts/pi); % equivalent circular radius of 150×150mm
L_vd     = (r_out_vd - r_in_vd) / tan(7 * pi/180);

% Wide-angle diffuser: 150×150 → 450×150mm, 35° total (17.5° half-angle, width only)
L_wad = (0.450 - 0.150) / (2 * tan(17.5 * pi/180));

fprintf('--- Diffuser Lengths (from geometry) ---\n');
fprintf(' Vertical diffuser length:   %.0f mm\n', L_vd*1000);
fprintf(' Wide-angle diffuser length:  %.0f mm\n\n', L_wad*1000);

%% =====
% COMPONENT HEAD LOSSES
%% =====

```

```

% Head loss formulae
h_maj = @(f, L, Dh, V) f .* (L./Dh) .* (V.^2./(2.*g));
h_min = @(K, V) K .* (V.^2./(2.*g));

% Component names
names = {
    ' 1. Horiz. pipe      | PVC      | D=75mm  | L=300mm';
    ' 2. Elbow           | PVC      | D=75mm  | 90°';
    ' 3. Vert. pipe      | PVC      | D=75mm  | L=250mm';
    ' 4. Vert. diffuser  | GFRP     | 75mm→150×150 | 7° half-angle';
    ' 5. 90° bend        | GFRP     | 150×150 | no vanes';
    ' 6. Wide-angle diff. | GFRP     | 150×150→450×150 | 35°, no vanes';
    ' 7. Honeycomb       | PLA      | 450×150 | L=250mm, cell D=10mm';
    ' 8. Settling chamber | GFRP     | 450×150 | L=300mm';
    ' 9. Contraction     | GFRP     | 450×150→150×150 | L=450mm';
    '10. Test section    | Acrylic  | 150×150 | L=800mm';
    '11. 90° bend        | GFRP     | 150×150 | no vanes';
    '12. Return diffuser | GFRP     | 150×150→75mm | converging';
    '13. Vert. pipe      | PVC      | D=75mm  | L=250mm';
    '14. Elbow           | PVC      | D=75mm  | 90°';
    '15. Horiz. pipe     | PVC      | D=75mm  | L=2000mm';
    '16. 2x elbows + 3x pipes | PVC    | D=75mm  | L=300mm each';
};

H = zeros(16,1);

H(1) = h_maj(f_pipe, 0.300, Dh_pipe, V_pipe);
H(2) = h_min(K_elbow, V_pipe);
H(3) = h_maj(f_pipe, 0.250, Dh_pipe, V_pipe);
H(4) = h_maj(f_vd, L_vd, Dh_vd, V_vd);
H(5) = h_min(K_bend, V_ts);
H(6) = h_min(K_wad, V_ts) + h_maj(f_wad, L_wad, Dh_wad, V_wad);
H(7) = h_maj(f_hc, 0.250, Dh_hc, V_sc);
H(8) = h_maj(f_sc, 0.300, Dh_sc, V_sc);
H(9) = h_min(K_cont, V_ts) + h_maj(f_con, 0.450, Dh_con, V_con);
H(10) = h_maj(f_ts, 0.800, Dh_ts, V_ts);
H(11) = h_min(K_bend, V_ts);
H(12) = h_min(K_conv, V_ts);
H(13) = h_maj(f_pipe, 0.250, Dh_pipe, V_pipe);
H(14) = h_min(K_elbow, V_pipe);
H(15) = h_maj(f_pipe, 2.000, Dh_pipe, V_pipe);
H(16) = 2*h_min(K_elbow, V_pipe) + 3*h_maj(f_pipe, 0.300, Dh_pipe, V_pipe);

%% =====
% RESULTS TABLE
%% =====

H_total = sum(H);
H_remaining = H_pump - H_total;
SF = H_pump / H_total;

fprintf('=====\n');
fprintf(' COMPONENT HEAD LOSS BREAKDOWN\n');
fprintf('=====\n');
fprintf('%-55s %10s\n', 'Component', 'Head Loss (m)');
fprintf('%s\n', repmat('-',1,68));

for i = 1:16
    fprintf('%-55s %10.4f m\n', names{i}, H(i));

```

```

end

fprintf('%s\n', repmat('=',1,68));
fprintf('%-55s %10.4f m\n', 'TOTAL HEAD LOSS', H_total);
fprintf('%-55s %10.4f m\n', 'AVAILABLE PUMP HEAD', H_pump);
fprintf('%-55s %10.4f m\n', 'REMAINING HEAD', H_remaining);
fprintf('%-55s %10.2f\n', 'SAFETY FACTOR', SF);
fprintf('%s\n', repmat('=',1,68));

if H_total < H_pump
    fprintf(' STATUS: PUMP IS ADEQUATE (H_pump / H_total = %.1fx)\n', SF);
else
    fprintf(' STATUS: PUMP INADEQUATE - check design\n');
end
fprintf('%s\n\n', repmat('=',1,68));

%% =====
% BAR CHART
%% =====

short_names = {
    'Horiz. pipe (PVC)'; 'Elbow (PVC)'; 'Vert. pipe (PVC)';
    'Vert. diffuser'; '90° bend (GFRP)'; 'Wide-angle diff.';
    'Honeycomb'; 'Settling chamber'; 'Contraction';
    'Test section'; '90° bend (GFRP)'; 'Return diffuser';
    'Vert. pipe (PVC)'; 'Elbow (PVC)'; 'Long pipe (PVC)';
    '2x elbow + 3x pipe';
};

figure('Position', [100 100 1000 550]);
b = barh(flipud(H), 0.6, 'FaceColor', [0.18 0.45 0.70]);
set(gca, ...
    'YTick', 1:16, ...
    'YTickLabel', flipud(short_names), ...
    'FontSize', 10, ...
    'XGrid', 'on', ...
    'GridAlpha', 0.3);
xlabel('Head Loss (m)', 'FontSize', 11);
title({'Hydrodynamic Tunnel - Component Head Loss Distribution'; ...
    sprintf('Total = %.4f m | Pump Head = %.3f m | SF = %.1f', ...
        H_total, H_pump, SF)}, ...
    'FontSize', 12);

% Annotate values on bars
for i = 1:16
    idx = 17 - i;
    if H(i) > 0.001
        text(H(i) + 0.0005, idx, sprintf('%.4f', H(i)), ...
            'VerticalAlignment', 'middle', 'FontSize', 8.5);
    end
end

xlim([0, max(H)*1.25]);
box off;

```