


Front 1:1

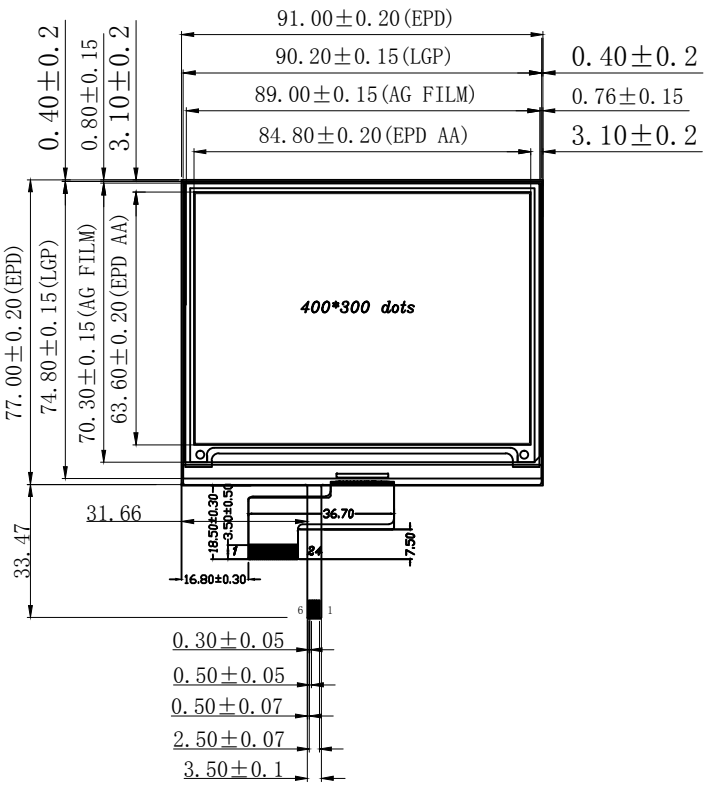

Side Horizontal 10:1

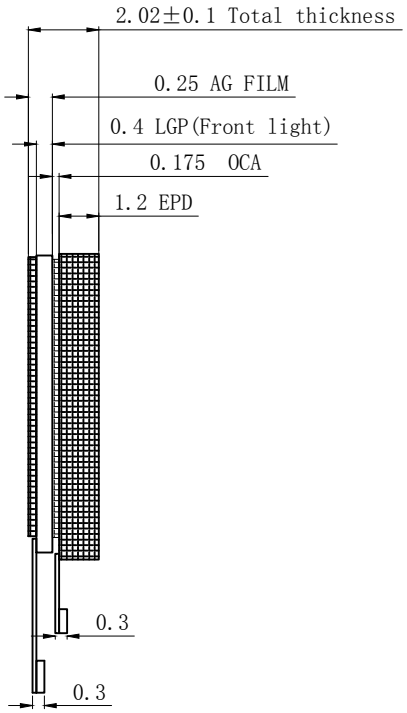


Back 1:1

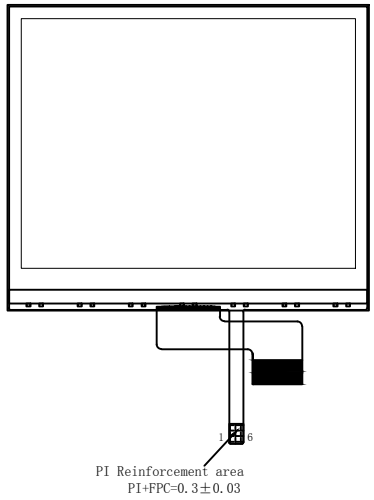

FL Pin define	
1	LED+
2	LED+
3	NC
4	NC
5	LED−
6	LED−

Technical Parameter:
1. Full bonding process
2. Front light 7PCS LED series connection
3. Front light Voltage:21V
4. Surface hardness:L≥6H
5. Operating Environment:0℃~+50℃,40%~70%RH
6. Storage Environment:-25℃~+70℃, 40%~70%RH
7. Unmarked Dimensional Tolerances:±0.2mm

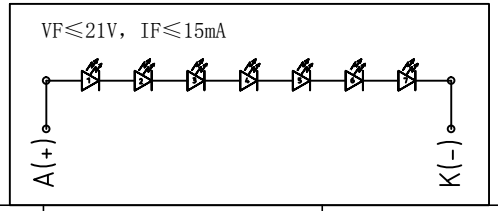

大连佳显电子有限公司
DALIAN GOOD DISPLAY CO., LTD

DRAWN BY: 绘 图:	PRODUCT MODEL: 产品型号: GDEY042T81-FL02	VIEW: 投影方式: 第三角投影法
CHECKED BY: 审 核:	CUSTOMER ID: 客户编号:	
APPROVED BY: 批 准:	DATE: 日 期: 2024-03-12	UNITS 单 位: mm
Standard tolerance: 公 差:	WEBSITE: 网 址: www.good-display.com	SCALE 比 例: 1:1