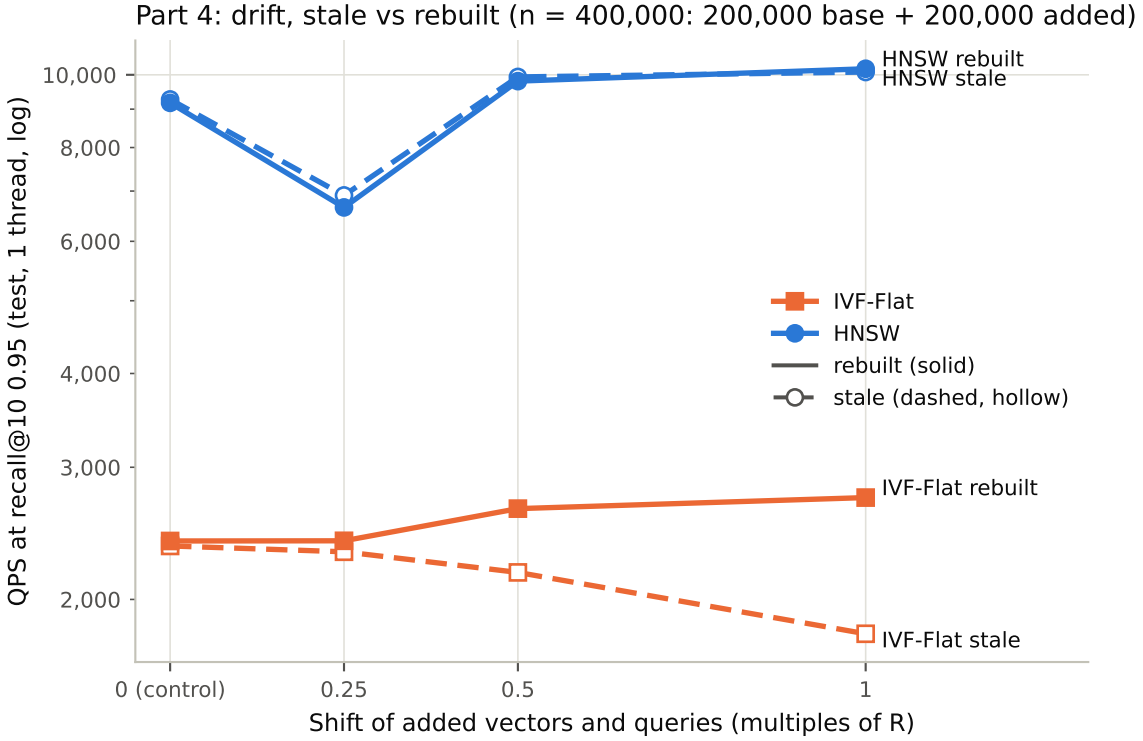
Part 4: drift, stale vs rebuilt (n = 400,000: 200,000 base + 200,000 added)
QPS at recall@10 0.95 (test, 1 thread, log)
10,000
8,000
6,000
4,000
3,000
2,000
HNSW rebuilt
HNSW stale
IVF-Flat
HNSW
rebuilt (solid)
stale (dashed, hollow)
IVF-Flat rebuilt
IVF-Flat stale
0 (control)
0.25
0.5
1
Shift of added vectors and queries (multiples of R)