On·Call® Plus

Blood Glucose Monitoring System

NEW ISO 15197

RELIABLE

Convenient, Accurate Results in 10 Seconds

AFFORDABLE

Frequent Testing Helps Improve Control

LESS PAIN

Very Small Blood Sample
Fingertip or Forearm Testing



For testing glucose in whole blood.
For self testing and professional use.
Can be used outside the body.

Read Instructions Before Use

Do Not Dispose in Household Waste

2°C 35°C
Storage Temperature 2°C – 35°C

10% 80%
Relative Humidity 10% – 80%

500hPa 1060hPa
Atmospheric Pressure 500hPa – 1060hPa

In Vitro Diagnostic Medical Device

CE 0123

EC REP

MedNet EC-REP GmbH
Borkstrasse 10
48163 Muenster,Germany

On·Call® Plus

Système de Surveillance de la Glycémie

300 test memory with date and time
7, 14 and 30-day averages
PC download option


REF G113-111

Contents:

- Blood Glucose Meter
- 10 Test Strips
- Code Chip
- Control Solution 1
- 10 Sterile Lancets
- Lancing Device
- Clear Cap (for testing on forearm and palm)
- Carrying Case
- User's Manual
- Quick Reference Guide
- Warranty Card

On·Call® Plus

Blood Glucose Monitoring System

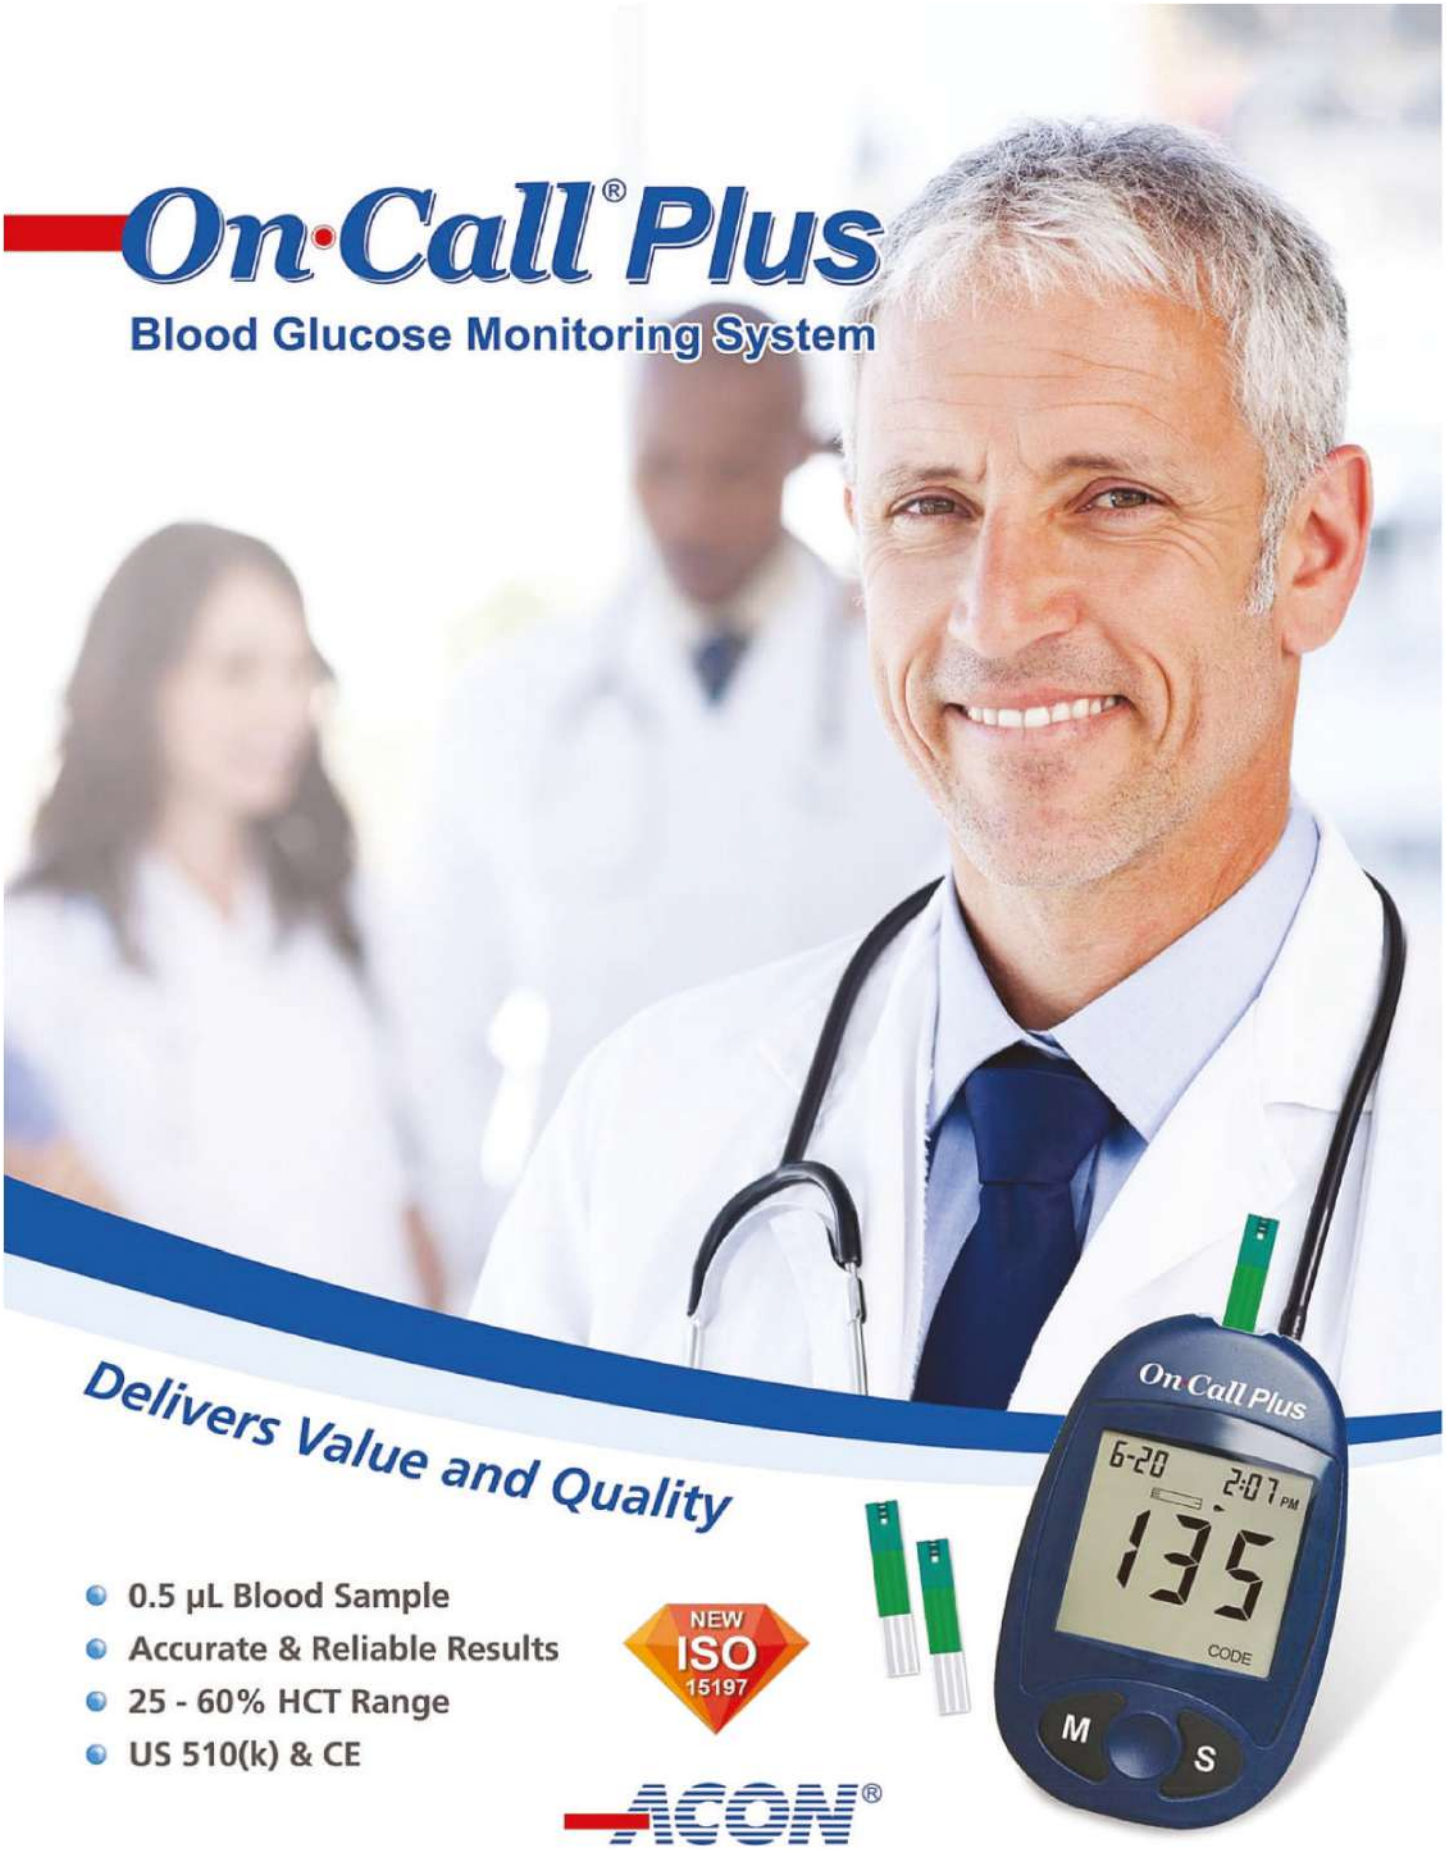

Delivers Value and Quality

- 0.5 µL Blood Sample
- Accurate & Reliable Results
- 25 - 60% HCT Range
- US 510(k) & CE

NEW ISO 15197

ACON®

Diabetes Care

On·Call® Plus

Blood Glucose Monitoring System

Key Features



- 0.5 µL blood sample
- HCT 25 - 60% HCT range
- 2 - 35°C strip storage temperature
- Optional individually packaged test strips available
- Alternative testing sites including fingertip, forearm and palm
- Automatic detection of insufficient sample
- 300 test memory with date and time
- 7, 14, 30 - day averages calculation
- Easy PC data transfer and smart App data analysis

Specification

Feature	Specification
Technology	Biosensor/Electrochemical, Glucose oxidase (GOD)
Result Calibration	Plasma-equivalent
Test Time	10 seconds
Sample Size	0.5 µL
Sample Type	Fresh capillary whole blood
Hematocrit Range	25 - 60%
Glucose Test Range	20 - 600 mg/dL (1.1 - 33.3 mmol/L)
Memory Storage	300 results with date and time
Test Averaging	7, 14, 30-day averages
Data Transfer	USB
Control Solution	3 levels
Audio Feature	Optional beep for sample detection, error messages
Automatic Shutoff	2 minutes after last action
Battery	One (1) CR 2032 3.0V coin cell battery
Battery Life	1,000 measurements
Operating Conditions	41 - 113°F (5 - 45°C) and 10 - 90% relative humidity
Strip Storage Temperature	2-35°C
Expiration Date	24 months (6 months after first opening)

ACON®

CE 0123