
HR915310AE

Electrical Specification @25°C

RoHS Compliant (Pb Free)
Isolation: 2250VDC 0.5mA 60sec (UTP Side to Chip Side)
OCL: 350uH Minimum @100KHz 100mV with 8mADC
Insertion Loss: −1.0dB Maximum @1MHz ~ 100MHz
Return Loss: −18dB Minimum @1MHz ~ 30MHz / −13.5dB Minimum @30MHz ~ 60MHz
−12dB Minimum @60MHz ~ 80MHz / −10dB Minimum @80MHz ~ 100MHz
Common Mode Rejection: −30dB Minimum @1MHz ~ 100MHz
Crosstalk: −30dB Minimum @1MHz ~ 100MHz

Schematics

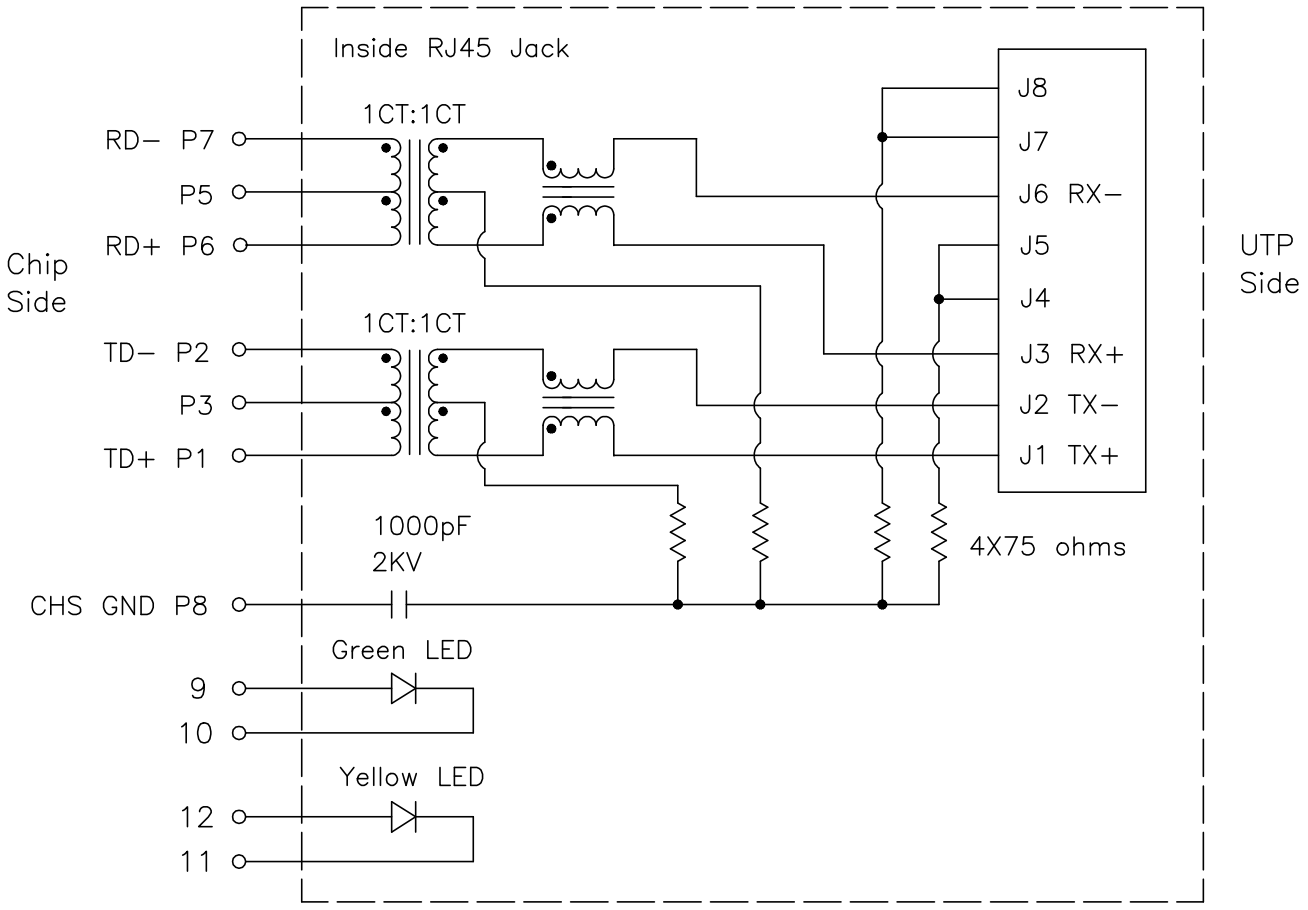

Notes: Connect CHS GND to PCB Ground

Address: No.16, Industrial Road Central, Industrial Zone, Xiaolan Town,
Zhongshan City, Guangdong Province, China
Tel: (0760)86103511 86103508 Fax: (0760)86103686 Post code: 528416
E-Mail: sales@hanrun.com http://www.hanrun.com


Downloaded From Oneyac.com

HanRun®
Electronics Company Limited


HR915310AE

- RoHS Compliant (Pb Free)
- Designed for Network Interface Card Application
- Meets or Exceeds IEEE802.3 standards including 350uH Min OCL with 8mADC
- High performance for EMI suppression, Crosstalk, Return Loss and Consistent Electrical
- Minimum 2250VDC isolation per IEEE802.3 requirement
- Minimize PCB space and Simplify PCB Layout
- Less magnetic components to place on PCB, Higher reliability and yields
- UL Recognized Component: File # E330599


Mechanical Dimensions:

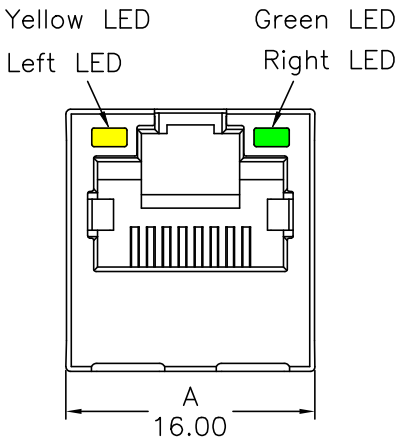

(Top View)

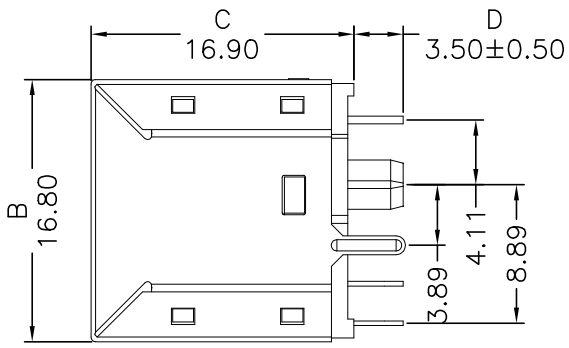

(Side View)



(Bottom View)



(Front View)

Standard LED	Wavelength	Forward V (Min/Max)	Forward A	Type
Green	568nm	1.8V/2.8V	20mA	squareness
Yellow	585nm	1.8V/2.8V	20mA	squareness


Dimensions in mm
Unless otherwise specified, Tolerance: .xx ±0.25
REV.: 01

Address: No.16, Industrial Road Central, Industrial Zone, Xiaolan Town,
Zhongshan City, Guangdong Province, China
Tel: (0760)86103511 86103508 Fax: (0760)86103686 Post code: 528416
E-Mail: sales@hanrun.com http://www.hanrun.com

Downloaded From Oneyac.com


HR915310AE

Mechanical Dimensions:

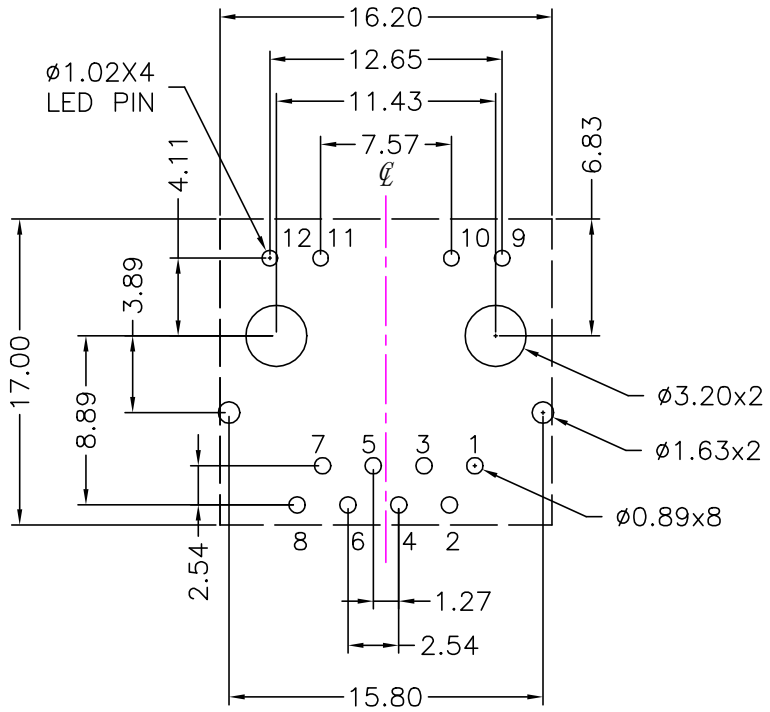

Recommended PCB layout (Component Side View)
All dimension tolerance are ±0.08 unless otherwise specified

Suggested Panel Cutout:

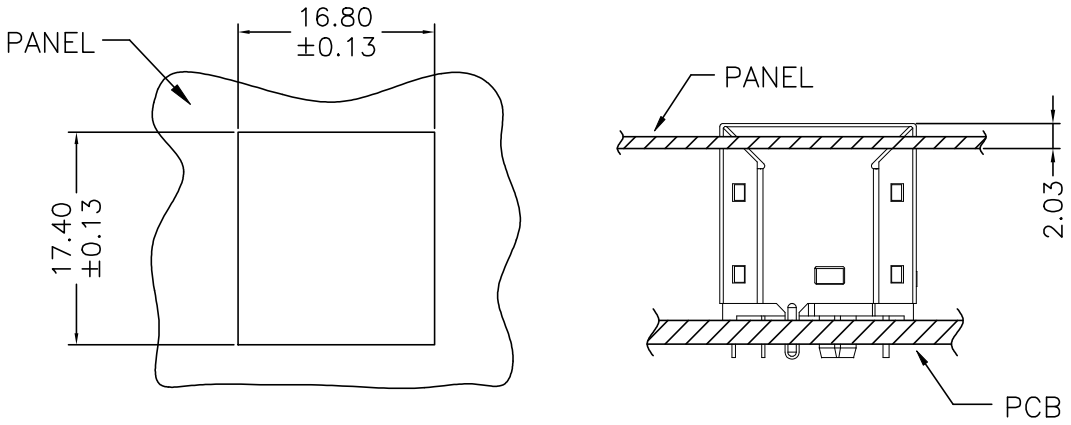

SUGGESTED PANEL OPENING

Dimensions in mm
Unless otherwise specified, Tolerance: .xx ±0.25
REV.: 01

Address: No.16, Industrial Road Central, Industrial Zone, Xiaolan Town,
Zhongshan City, Guangdong Province, China
Tel: (0760)86103511 86103508 Fax: (0760)86103686 Post code: 528416
E-Mail: sales@hanrun.com http://www.hanrun.com

Downloaded From Oneyac.com

HR915310AE

Material Specification:

Housing: PA66 GF Black UL94V-0
Shield: 30u" Nickel over 0.20mm Thickness Brass
Insert: PA66 GF Black UL94V-0
Phosphor Bronze 0.30mm Thickness
Plating Area, 30u" gold over 50u" nickel
Solder Area, 100u" tin over 50u" nickel
Contact pin: PA66 GF Black UL94V-0
Phosphor Bronze; 100u" Tinning

Mechanical Performance:

Contact resistance: 30 mohm Maximum
Mating force: 5 lbs Maximum
Unmating force: 5 lbs Maximum
Operating life: 750 Cycles Minimum

Operating and Storage Temperature:

Operating Temperature Range: -40°C ~ +85°C
Storage Temperature Range: -40°C ~ +85°C

Address: No.16, Industrial Road Central, Industrial Zone, Xiaolan Town,
Zhongshan City, Guangdong Province, China
Tel: (0760)86103511 86103508 Fax: (0760)86103686 Post code: 528416
E-Mail: sales@hanrun.com http://www.hanrun.com

Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

>>HanRun

Downloaded From Oneyac.com