

$ISET: 540/2700 = 200mA$

U1
 BQ21040DBVR

Pins: ISET, GND, VIN, CHG#, OUT, TS

Components:
 B5819W SL (Diode)
 C2 1uF (Capacitor)
 R3 2.7kΩ (Resistor)
 R2 10kΩ (Resistor)
 R9 10kΩ (Resistor)
 C11 1uF (Capacitor)
 LED2 KT-0603W (LED)

Connections:
 VBUS → D1 → ISET
 ISET → R3 → VIN
 VIN → C2 → GND
 VIN → R2 → GND
 CHG# → LED2 → R9 → GND
 OUT → C11 → GND
 OUT → R9 → GND
 TS → GND

Battery Voltage Divider:
 VBAT → [Resistor] → VDDH/VBAT → [Resistor] → GND



TP1, TP2 (Test Points)

RESET

SW1

GND

TS-1187A-B-A-B

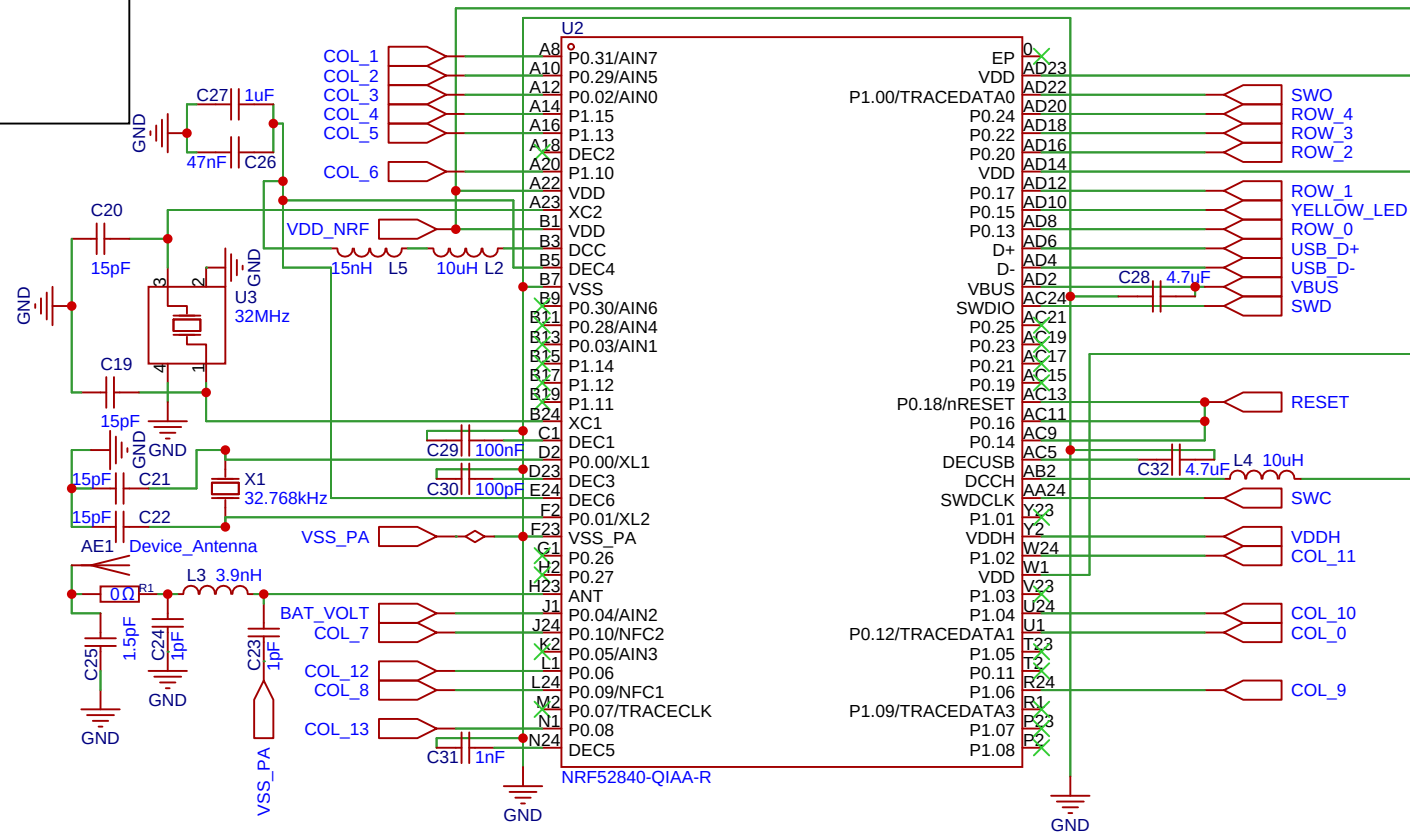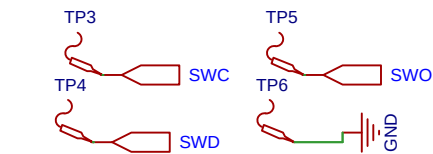

Schematic	Schematic1			Create at	2026-05-19
				Update at	2026-05-21
Board	Board1			Page	P1
Drawn		nrf52board			
Reviewed					
		Version	Size	Page 1 Total 1	
		V1.0	A4	EasyEDA.com	